SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PROJECT

FIXTURE TYPE

DATE

ASSEMBLED IN AMERICA

REV 09.03.26



(D) Diffused Lens in Rigid Tubing

DESCRIPTION

Solina 360 MIYO (Make-It-Your-Own) Suspension is a flexible, architectural lighting system that blends form and function to create continuous, 360-degree illumination without pixelation. Its sculptural, minimal design provides a striking visual element while delivering exceptional color rendering for a clean, uninterrupted glow.

Designed to offer both a sophisticated aesthetic and an inviting ambiance, Solina 360 enhances interiors with its fluid, seamless flow. Choose from Static White or Warm Dim (**27D** & **30D**). With flexible configuration options and precision engineering, Solina 360 MIYO serves as both a functional lighting solution and a design statement, making it the perfect solution for a wide range of applications. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

LUMEN PERFORMANCE AT 3000K (D)

7W LUMEN OUTPUT	1114 lm/ft	EFFICIENCY	137 lm/watt
CRI	93	Rg	98
BEAM ANGLE	360°	BEAM TOLERANCE	+/- 30CCT

SPECIFICATIONS

DIMENSIONS	DIA: C & D = 1.2"
INPUT	24VDC with 5" leads
POWER SUPPLIES	Remote 24VDC power supply required
POWER CONSUMPTION	3, 5, or 7 watts per foot
MAX LENGTH	60' at 3 watts, 40' at 5 watts, 26' at 7 watts
MATERIAL	UV Resistant Silicon
OPERATING TEMPERATURE	-4° F (-20° C) to 122° F (+50° C)
AVERAGE LED LIFE	50,000 hrs
WARRANTY	5 Year pro-rated

LAMP

- Static White Color Temperatures ranging from **2400K** through **4000K**
- Warm Dim: **27D** & **30D** dim down to 1800K, resembling halogen light sources

POWER SUPPLY (INCLUDED IN CANOPY)

- 120V input, 24VDC 100 watt Class 2 output
- Electronic Low Voltage LED Power Supply
- 2-in-1 Power Driver And Dimmer (**ELV**)

DIMMERS & CONTROLS (SOLD SEPARATELY)*

- Pure Smart™ Wi-Fi Dimmer

*For nLight compatibility please refer to our remote power supply specifications or, contact us for a custom quotation.

COMPLIANCE

*Title 24 JA8 compliant for 2700K CCT and above when used with PureEdge remote Universal power supplies, ETL, Class 2, Damp Location, Assembled in USA.

APPLICATIONS

Designed for indoor use only. Ideal applications include general lighting, residential, commercial, retail, and hospitality environments.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting

PROJECT

FIXTURE TYPE

DATE

REV 09.03.26

360 LENS OPTIONS




(**C**) Cora Weave Rigid Tube



(**D**) Diffused Rigid Tube

360 ILLUMINATION



COVER FINISHES



Black



Polished Nickel



Satin Nickel



Satin Brass



Matte White
RAL 9003



Solina Horizontal Suspension

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM


PROJECT

FIXTURE TYPE

DATE


REV 09.03.26

SOLINA SUSPENSION VERTICAL MONOPOINT

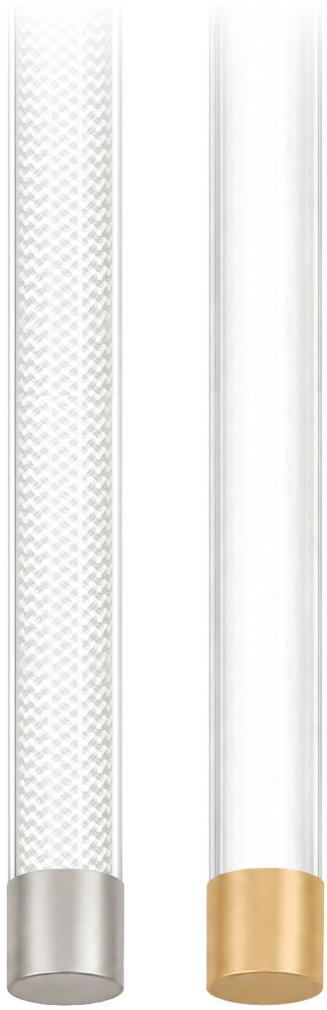

C
Cora with Solina Tube in Satin Nickel

D
Diffused with Solina Tube in Satin Brass

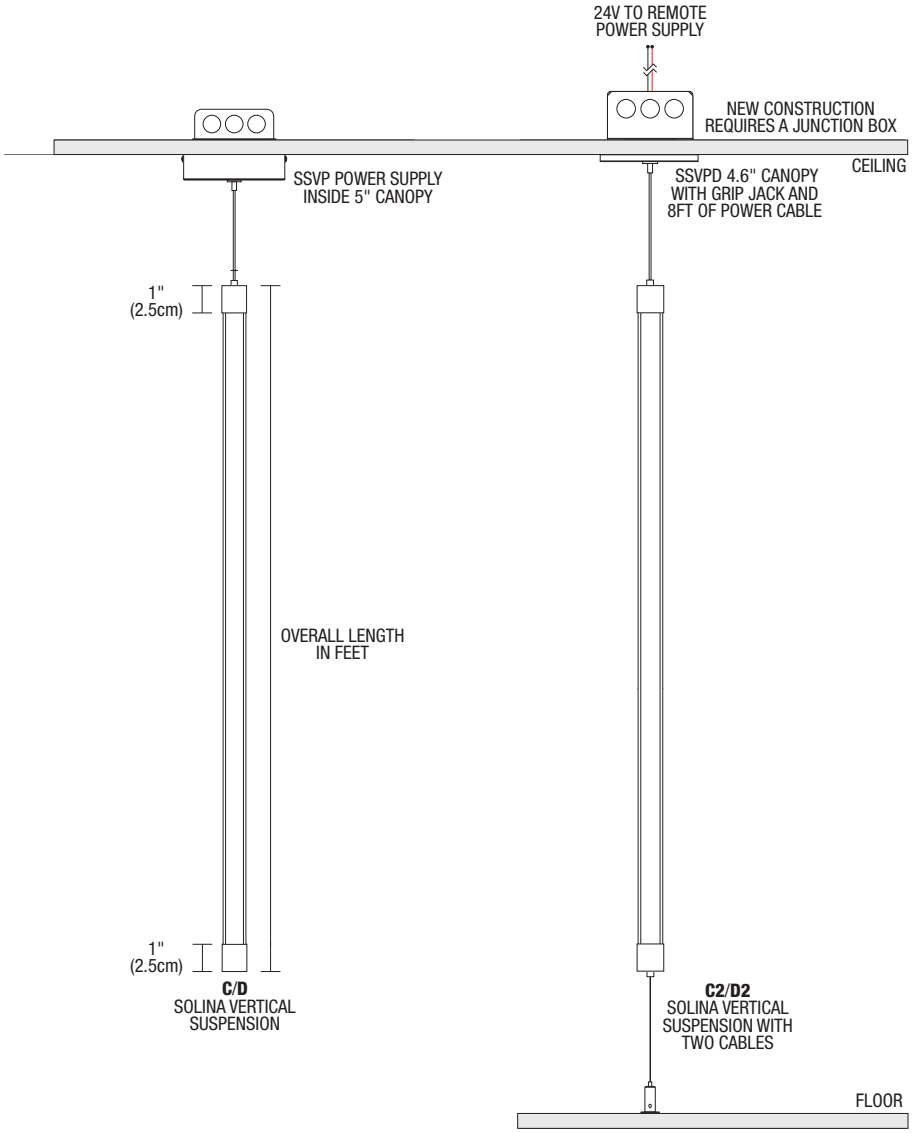

System	Type	Wattage	Overall Length in Feet*	Color Temperature	Finish*
SSVP	**C**	**7W**	**3FT**	**24K**	**SN**

SSVP Solina Suspension Vertical with adjustable 8ft Aircraft Cable and 5" Round Canopy with Power
SSVDP Solina Suspension Vertical with adjustable 8ft Aircraft Cable and 4.6" Round Canopy. Powered by 2-in-1 Wall Dimmer and Power Supply

C 1" Cora Flex 360 inside Solina 1.2" Clear Straight Tube
D 1" Diffused Flex 360 inside Solina 1.2" Clear Straight Tube
C2 1" Cora Flex 360 inside Solina 1.2" Clear Straight Tube, with Floor Cable Connection
D2 1" Diffused Flex 360 inside Solina 1.2" Clear Straight Tube, with Floor Cable Connection

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

1–8FT Order in various increments from 1-8 feet
*Custom lengths available upon request.

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SN Satin Nickel
BB Satin Brass End Caps with Black Canopy
BW Satin Brass End Caps with White Canopy
NB Polished Nickel End Caps with Black Canopy
NW Polished Nickel End Caps with White Canopy
XX** Custom
***__L** add L after End Cap finish for Trimless Plaster-in Canopy

**RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting

PROJECT


FIXTURE TYPE

DATE

REV 09.03.26

SOLINA 360 CEILING HORIZONTAL



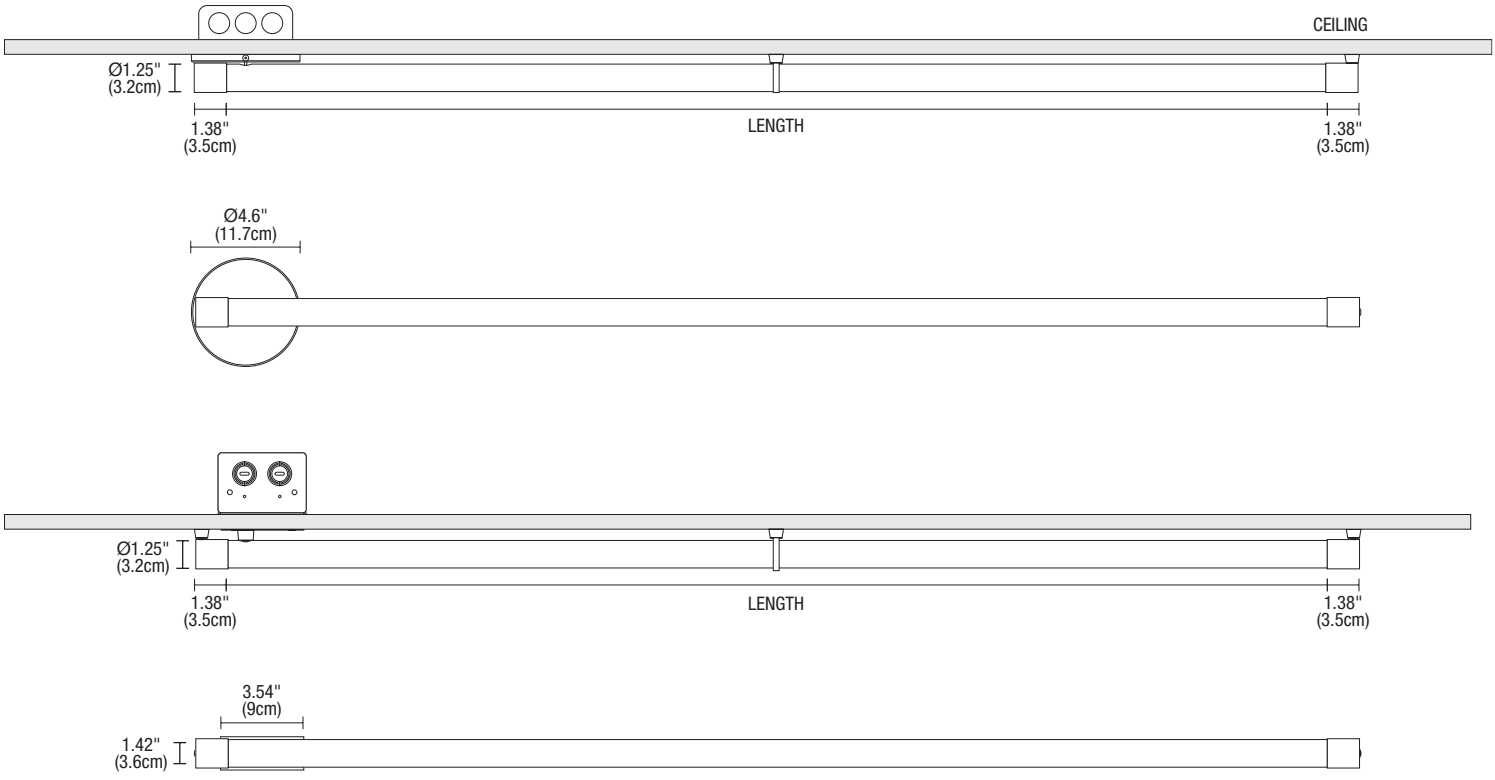

System	Type	Wattage	Canopy*	Nominal Lengths in Feet*	Color Temperature	Finish*
SCDP	**C**	**5W**	**4R**	**8FT**	**30K**	**SN**

SCDP Solina Horizontal, with 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

1R 1" Round Canopy (White finish only)
4R 4.6" Round Canopy
*Canopy options shown on page 14

3-40FT Order in 1' increments
3W max length - 30', up to 40' with a power supply at each end
5W max length - 20', up to 40' with a power supply at each end
7W max length - 12' up to 24' with a power supply at each end
*Custom lengths available upon request.

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SN Satin Nickel
BB Satin Brass End Caps with Black Canopy
BW Satin Brass End Caps with White Canopy
NB Polished Nickel End Caps with Black Canopy
NW Polished Nickel End Caps with White Canopy
XX** Custom
***__L** add L after End Cap finish for Trimless Plaster-in Canopy
**RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting

PROJECT

FIXTURE TYPE


DATE

REV 09.03.26

SOLINA 360 SUSPENSION HORIZONTAL



SUPPORT CABLE INCLUDED WITH LENGTHS OVER 4'

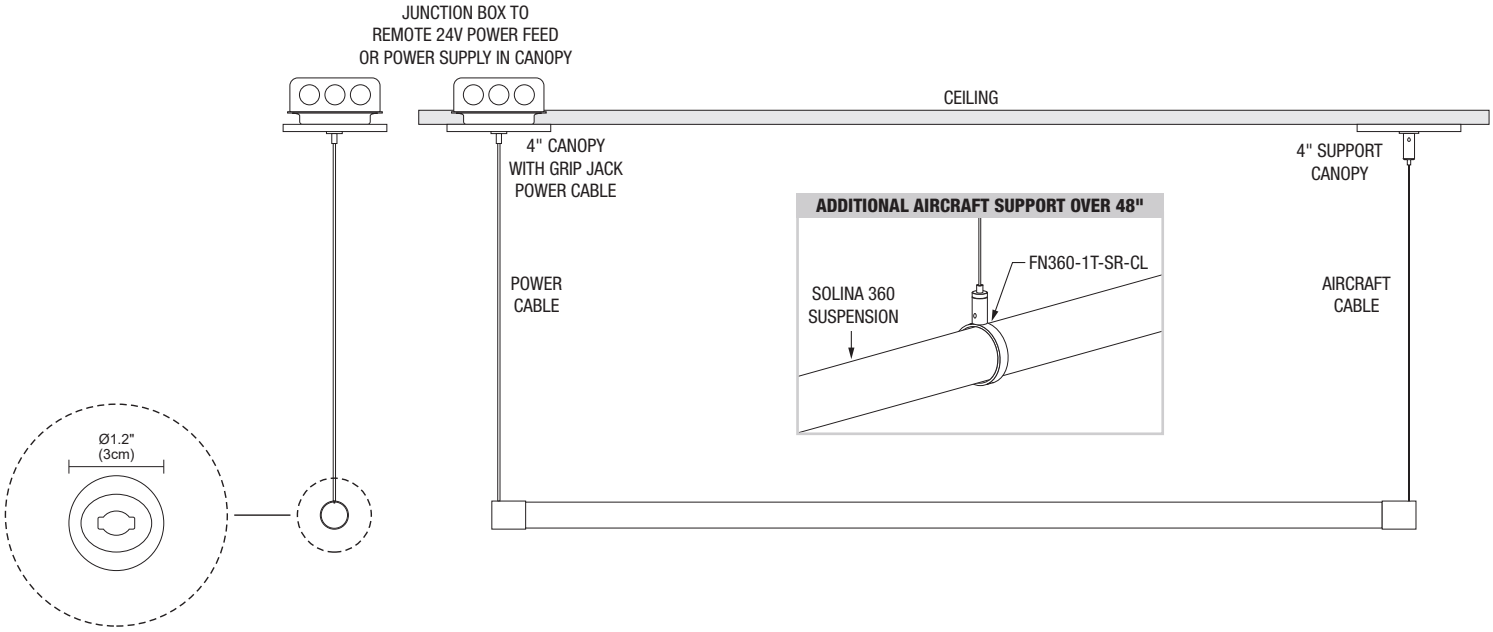

System	Type	Wattage	Nominal Lengths in Feet*	Color Temperature	Finish*
SSHP	C	5W	8FT	30K	SN

SSHP Solina Horizontal Suspension with adjustable 8ft Aircraft Cable and 5" Round Canopy with Power

SSHDP Solina Horizontal Suspension with adjustable 8ft Aircraft Cable and 4.6" Round Canopy. Powered by 2-in-1 Wall Dimmer and Power Supply

C 1" Cora Flex 360 inside Solina 1.2" Clear Straight Tube

D 1" Diffused Flex 360 inside Solina 1.2" Clear Straight Tube

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot

*Only available in Static White color temperatures

3-40FT Order in 1' increments

3W max length - 30', up to 40' with a power supply at each end

5W max length - 20', up to 40' with a power supply at each end

7W max length - 12' up to 24' with a power supply at each end

*Custom lengths available upon request.

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SN Satin Nickel
BB Satin Brass End Caps with Black Canopy
BW Satin Brass End Caps with White Canopy
NB Polished Nickel End Caps with Black Canopy
NW Polished Nickel End Caps with White Canopy
XX** Custom
***__L** add L after End Cap finish for Trimless Plaster-in Canopy

**RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting

PROJECT

FIXTURE TYPE

DATE

REV 09.03.26


RING MONOPOINT WITH PENDANT STEM




RPP



RPDP

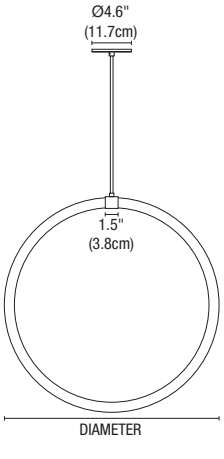



System	Type	Wattage	Length of Stem in Inches*	Diameter*	Color Temperature	Finish
RPP	**C**	**5W**	**6**	**D18**	**30K**	**SN**

RPP Solina Ring Stem Suspension, with 5" Round Canopy with Power
RPDP Solina Ring Stem Suspension, with 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box and 4.6" Round Canopy

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

1-72 1-72" Stem in 6" increments
*Custom lengths available

D18 18" Diameter
D24 24" Diameter
D30 30" Diameter
D36 36" Diameter
*Custom sizes available upon request.

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SN Satin Nickel
BB Satin Brass w/ Black Stem
BW Satin Brass w/ White Stem
PNB Polished Nickel w/ Black Stem
PNW Polished Nickel w/ White Stem


RING FLOATING SUSPENSION




RSP



RSDP

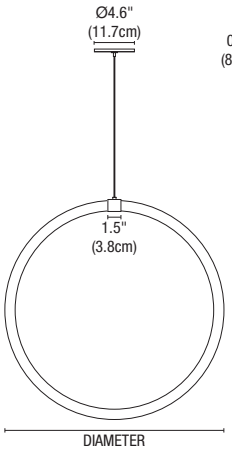



System	Type	Wattage	Diameter*	Color Temperature	Finish
RSP	**C**	**5W**	**D18**	**30K**	**SN**

RSP Solina Ring Suspension, with 8ft adjustable Aircraft Cable and 5" Round Canopy with Power
RSDP Solina Ring Suspension, with 8ft adjustable Aircraft Cables and 4.6" Round Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

D18 18" Diameter
D24 24" Diameter
D30 30" Diameter
D36 36" Diameter
*Custom sizes available upon request.

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting


PROJECT


FIXTURE TYPE


DATE

REV 09.03.26

HOOP CEILING FIXTURE

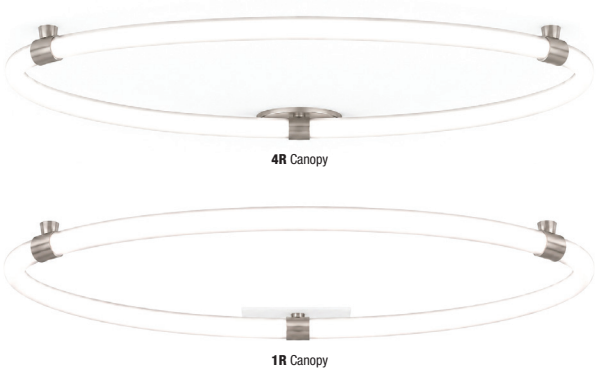

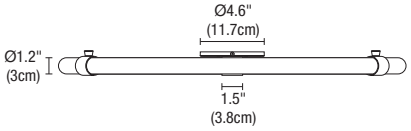

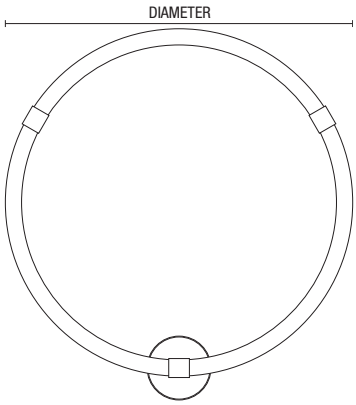

System	Type	Wattage	Canopy*	Diameter*	Color Temperature	Finish
HCDP	**C**	**5W**	**4R**	**D18**	**30K**	**SN**

HCDP Solina Hoop Ceiling, with 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

1R 1" Rectangular Canopy (White Finish Only)
4R 4.6" Round Canopy
*Canopy options shown on page 14


D18 18" Diameter
D24 24" Diameter
D30 30" Diameter
D36 36" Diameter
D42 42" Diameter
D48 48" Diameter
D54** 54" Diameter
D60** 60" Diameter
D72** 72" Diameter
*Custom sizes available upon request.
**Not available for 7 Watts


24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

HOOP MONOPOINT SUSPENSION



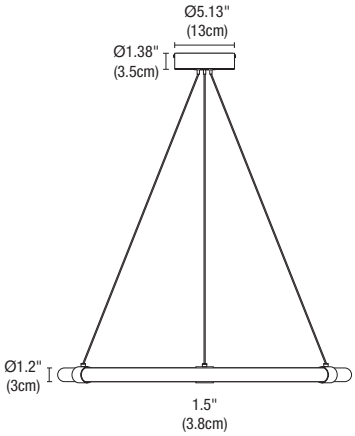

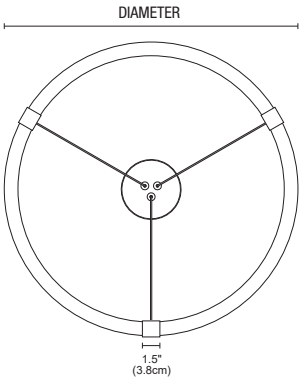

System	Type	Wattage	Diameter*	Color Temperature	Finish
HSP	**C**	**5W**	**D18**	**30K**	**SN**

HSP Solina Hoop Suspension, with 8ft adjustable Aircraft Cables and 5" Round Canopy with Power
HSDP Solina Hoop Suspension, with 8ft adjustable Aircraft Cables and 5" Round Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

D18 18" Diameter
D24 24" Diameter
D30 30" Diameter
D36 36" Diameter
D42 42" Diameter
D48 48" Diameter
D54** 54" Diameter
D60** 60" Diameter
D72** 72" Diameter
*Custom sizes available upon request
**Not available for 7 Watts

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting


PROJECT


FIXTURE TYPE


DATE

REV 09.03.26

HOOP SUSPENSION END FEED

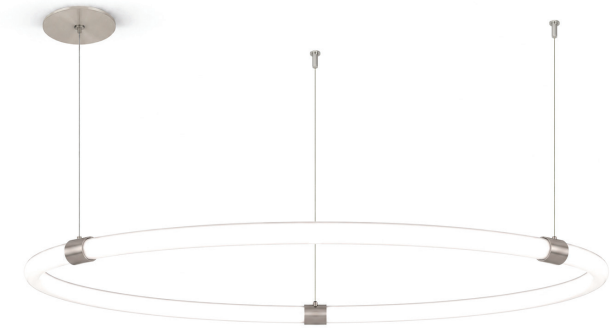

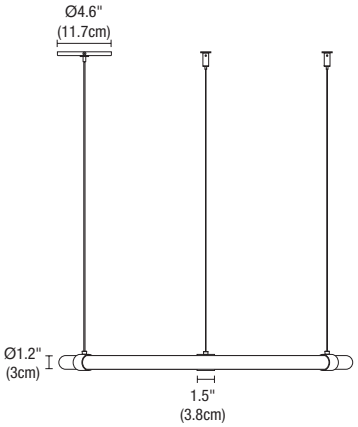



System	Type	Wattage	Diameter*	Color Temperature	Finish
HSEP	C	5W	D18	30K	SN

HSEP Solina Hoop Suspension End Feed with 8ft Adjustable Aircraft cables and a 5" Round Canopy with Power

HSDEP Solina Hoop Suspension End Feed with 8ft Adjustable Aircraft cables and 4.6" Round Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply

C Cora Weave Lens in 1.2" Dia Rigid Tubing

D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

D18 18" Diameter
D24 24" Diameter
D30 30" Diameter
D36 36" Diameter
D42 42" Diameter
D48 48" Diameter
D54** 54" Diameter
D60** 60" Diameter
D72** 72" Diameter
*Custom sizes available upon request, sizes over 48" require 6 support cables
**Not available for 7 Watts


24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White


BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SQUARE WITH PENDANT STEM

Square shape with 4" radius rounded corners.



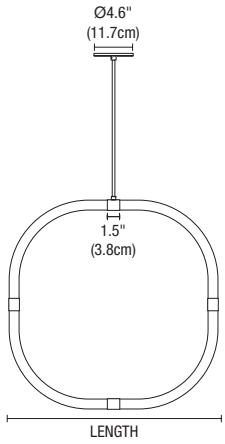



System	Type	Wattage	Length of Stem in Inches	Size*	Color Temperature	Finish
SQPP	C	3W	6	24	30K	SN

SQPP Solina Square Stem Suspension, with 5" Round Canopy with Power

SQPDP Solina Square Stem Suspension with 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box and 4.6" Round Canopy

C Cora Weave Lens in 1.2" Dia Rigid Tubing

D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

1-72 1-72" Stem in 6" increments

24 24" x 24"
30 30" x 30"
36 36" x 36"
42 42" x 42"
*Custom sizes available upon request

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SN Satin Nickel
BB Satin Brass w/ Black Stem
BW Satin Brass w/ White Stem
PNB Polished Nickel w/ Black Stem
PNW Polished Nickel w/ White Stem
XX* Custom
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PROJECT


FIXTURE TYPE


DATE


REV 09.03.26

SQUARE CEILING FIXTURE

Square shape with 4" radius rounded corners.

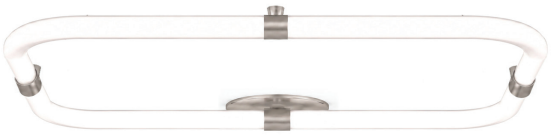

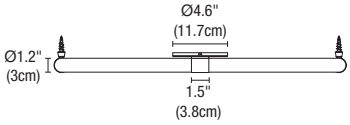

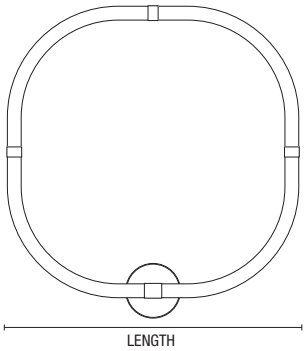

System	Type	Wattage	Canopy*	Size*	Color Temperature	Finish
SQCDP	**C**	**3W**	**4R**	**24**	**30K**	**SN**

SQCDP Solina Square Ceiling, with 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

1R 1" Rectangular Canopy (White Finish Only)
4R 4.6" Round Canopy
*Canopy options shown on page 14


24 18" x 18" Square
30 24" x 24" Square
36 30" x 30" Square
42** 36" x 36" Square
48 42" x 42" Square
54 48" x 48" Square
60*** 54" x 54" Square
60" x 60" Square
*Custom sizes available upon request
**Max diameter when using 7W
***Max diameter when using 5W


24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White


BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SQUARE SUSPENSION

Square shape with 4" radius rounded corners.

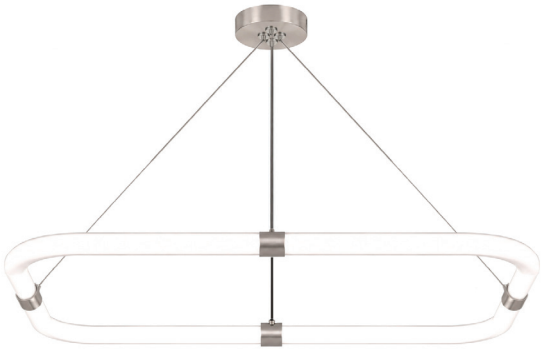

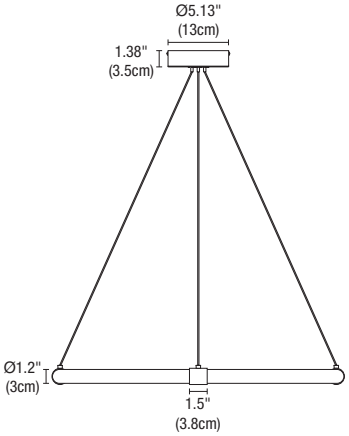

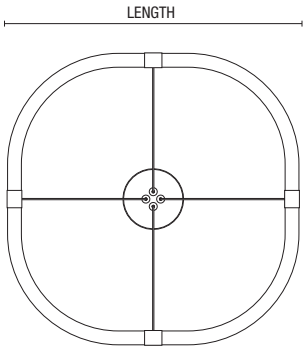

System	Type	Wattage	Size*	Color Temperature	Finish
SQSP	**C**	**3W**	**24**	**30K**	**SN**

SQSP Solina Square Suspension, with with 8ft adjustable Aircraft Cables and 5" Round Canopy with Power
SQSDP Solina Square Suspension, with 8ft adjustable Aircraft Cables and 5" Round Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
7W 7 Watts per foot
*Only available in Static White color temperatures

24 18" x 18" Square
30 24" x 24" Square
36 30" x 30" Square
42** 36" x 36" Square
48 42" x 42" Square
54 48" x 48" Square
60*** 54" x 54" Square
60" x 60" Square
*Custom sizes available upon request
**Max diameter when using 7W
***Max diameter when using 5W

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting

PROJECT


FIXTURE TYPE


DATE

REV 09.03.26

SQUARE SUSPENSION END FEED

Square shape with 4" radius rounded corners.

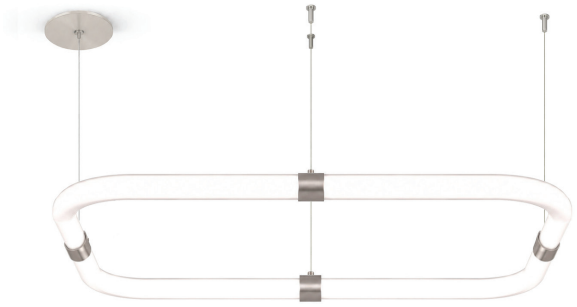

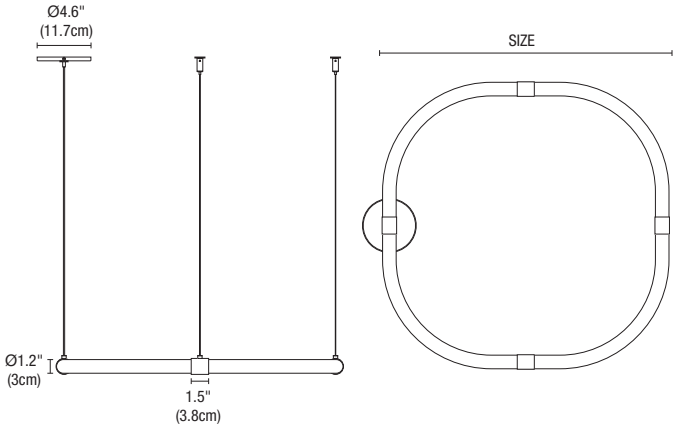

System	Type	Wattage	Size	Color Temperature	Finish
SQSEP	**C**	**5W**	**18**	**30K**	**SN**

SQSEP Solina Square End Feed Suspension with 8ft Adjustable Aircraft cables and 5" Round Canopy with Power

SQSEDP Solina Square End Feed Suspension with 8ft Adjustable Aircraft cables and 4.6" Round Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing

D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 watts per foot
5W 5 watts per foot
7W 7 watts per foot
*Only available in Static White color temperatures

18 18" x 18" Square
24 24" x 24" Square
30 30" x 30" Square
36 36" x 36" Square
42 42" x 42" Square
48 48" x 48" Square
54 54" x 54" Square
60 60" x 60" Square


24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*

*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

OVAL CEILING FIXTURE



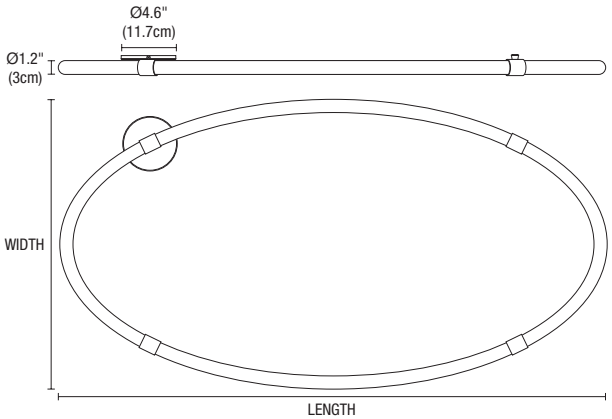

System	Type	Wattage	Canopy*	Width*	Length*	Color Temperature	Finish
OVCDP	**C**	**3W**	**4R**	**18**	**36**	**30K**	**SN**

OVCDP Solina Oval Ceiling, with 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing

D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
*Only available in Static White color temperatures

1R 1" Rectangular Canopy
4R 4.6" Round Canopy
*Canopy options shown on page 14

18 18" Wide Oval
24 24" Wide Oval
30 30" Wide Oval
36 36" Wide Oval
*Custom sizes available upon request.

2" increments

36-108 For an 18" wide oval, select a length between 36-108"
48-102 For a 24" wide oval, select a length between 48-102"
60-102 For a 30" wide oval, select a length between 60-102"
72-96 For a 36" wide oval, select a length between 72-96"
*Custom sizes available upon request.

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting


PROJECT


FIXTURE TYPE

DATE

REV 09.03.26

OVAL SUSPENSION

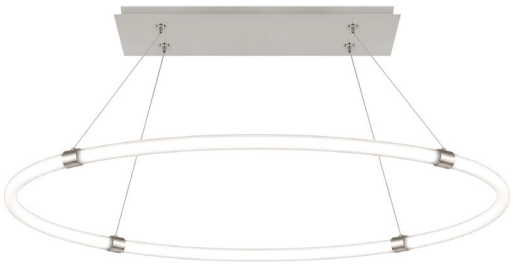

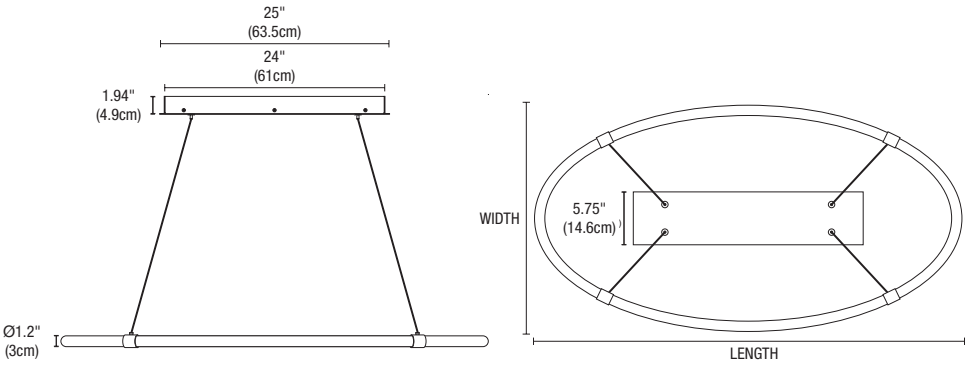

System	Type	Wattage	Width*	Length*	Color Temperature	Finish
OVSP	C	3W	24	48	30K	SN

OVSP Solina Oval Suspension with 8ft Adjustable Aircraft Cable and 26" Rectangular Canopy with Power

OVSDP Solina Oval Suspension, with 8ft adjustable Aircraft Cables and 26" Rectangular Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing

D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot

5W 5 Watts per foot

*Only available in Static White color temperatures

18 18" Wide Oval

24 24" Wide Oval

30 30" Wide Oval

36 36" Wide Oval

*Custom sizes available upon request.

2" increments

36-108 For an 18" wide oval, select a length between 36-108"

48-102 For a 24" wide oval, select a length between 48-102"

60-102 For a 30" wide oval, select a length between 60-102"

72-96 For a 36" wide oval, select a length between 72-96"

*Custom sizes available upon request.

24K 2400K Very Warm White

27K 2700K Incandescent White

27D 2700K Warm Dim, Dims to 1800K

30K 3000K Warm White

30D 3000K Warm Dim, Dims to 1800K

35K 3500K Neutral White

40K 4000K Cool White

BK Black

MW Matte White RAL 9003

SB Satin Brass


SN Satin Nickel


PN Polished Nickel

XX Custom*

*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

OVAL SUSPENSION END FEED

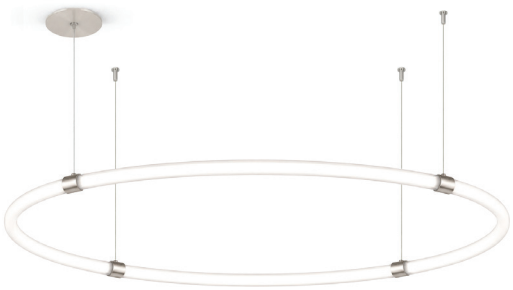

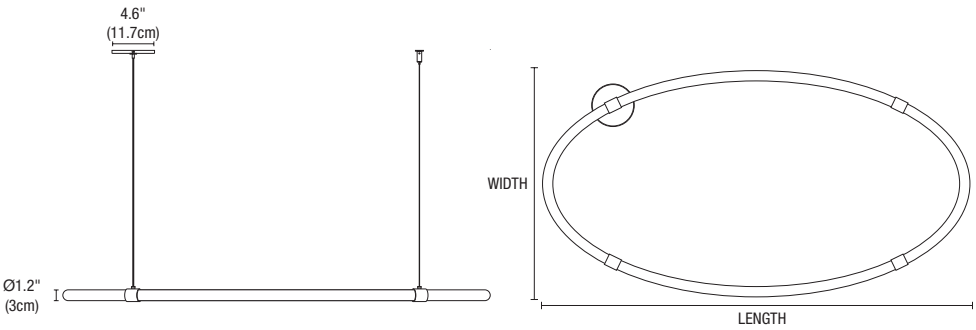

System	Type	Wattage	Width*	Length*	Color Temperature	Finish
OVSEP	C	3W	18	36	30K	SN

OVSEP Solina Oval End Feed Suspension with 8ft Adjustable Aircraft cables and 5" Round Canopy with Power

OVSEDP Solina Oval End Feed Suspension with 8ft Adjustable Aircraft cables and 4.6" Round Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing

D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 watts per foot

5W 5 watts per foot

*Only available in Static White color temperatures

18 18" wide oval

24 24" wide oval

30 30" wide oval

36 36" wide oval

*Custom sizes available upon request

2" increments

36-108 For an 18" wide oval, select a length between 36-108"

48-102 For a 24" wide oval, select a length between 48-102"

60-102 For a 30" wide oval, select a length between 60-102"

72-96 For a 36" wide oval, select a length between 72-96"

24K 2400K Very Warm White

27K 2700K Incandescent White

27D 2700K Warm Dim, Dims to 1800K

30K 3000K Warm White

30D 3000K Warm Dim, Dims to 1800K

35K 3500K Neutral White

40K 4000K Cool White

BK Black

MW Matte White RAL 9003

SB Satin Brass

SN Satin Nickel

PN Polished Nickel

XX Custom*

*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting

PROJECT

FIXTURE TYPE


DATE

REV 09.03.26

RECTANGLE CEILING FIXTURE

Rectangular shape with 4" radius rounded corners.



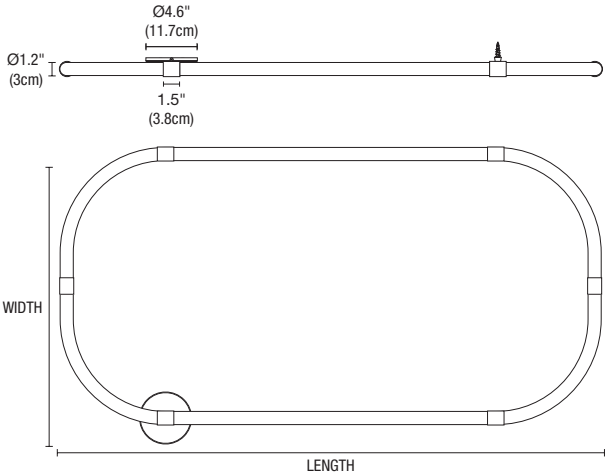

System	Type	Wattage	Canopy*	Width*	Length*	Color Temperature	Finish
RECDP	**C**	**3W**	**4R**	**24**	**48**	**30K**	**SN**

RECDP Solina Rectangle Ceiling, with 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
*Only available in Static White color temperatures

1R 1" Rectangular Canopy
4R 4.6" Round Canopy
*Canopy options shown on page 14

24 24" Wide Rectangle
30 30" Wide Rectangle
36 36" Wide Rectangle
*Custom sizes available upon request.

48-102 For a 24" wide rectangle, select a length between 48-102"
60-102 For a 30" wide rectangle, select a length between 60-102"
72-96 For a 36" wide rectangle, select a length between 72-96"
*Custom sizes available upon request.
94" Max Length for 5W
64" Max Length for 7W


24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White


BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

RECTANGLE SUSPENSION

Rectangular shape with 4" radius rounded corners.



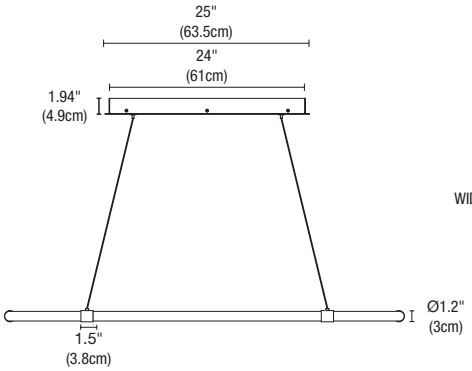

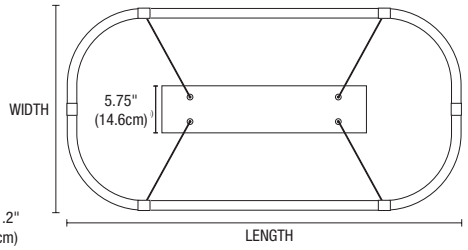

System	Type	Wattage	Width*	Length*	Color Temperature	Finish
RESP	**C**	**3W**	**24**	**48**	**30K**	**SN**

RESP Solina Rectangle Suspension with 8ft adjustable Aircraft Cable and 26" Rectangular Canopy with power
RESDP Solina Rectangle Suspension, with 8ft adjustable Aircraft Cable and 26" Rectangular Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply in wall J Box

C Cora Weave Lens in 1.2" Dia Rigid Tubing
D Diffused Lens in 1.2" Dia Rigid Tubing

3W* 3 Watts per foot
5W 5 Watts per foot
*Only available in Static White color temperatures

24 24" Wide Rectangle
30 30" Wide Rectangle
36 36" Wide Rectangle
*Custom sizes available upon request.

48-102 For a 24" wide rectangle, select a length between 48-102"
60-102 For a 30" wide rectangle, select a length between 60-102"
72-96 For a 36" wide rectangle, select a length between 72-96"
*Custom sizes available upon request.
94" Max Length for 5W
64" Max Length for 7W

24K 2400K Very Warm White
27K 2700K Incandescent White
27D 2700K Warm Dim, Dims to 1800K
30K 3000K Warm White
30D 3000K Warm Dim, Dims to 1800K
35K 3500K Neutral White
40K 4000K Cool White

BK Black
MW Matte White RAL 9003
SB Satin Brass
SN Satin Nickel
PN Polished Nickel
XX Custom*
*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PROJECT


FIXTURE TYPE


DATE


REV 09.03.26

RECTANGULAR SUSPENSION END FEED

Rectangular shape with 4" radius rounded corners.

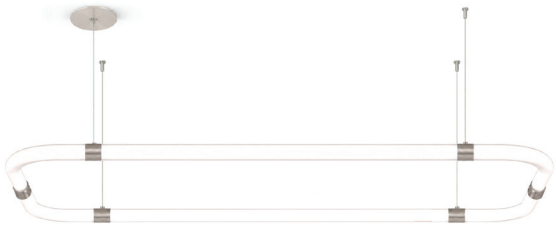

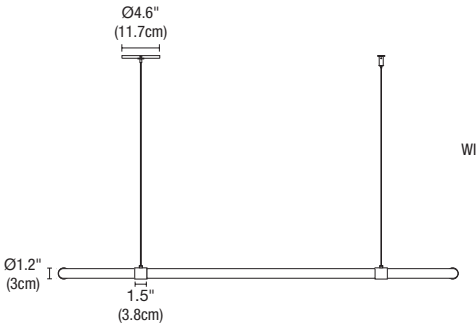

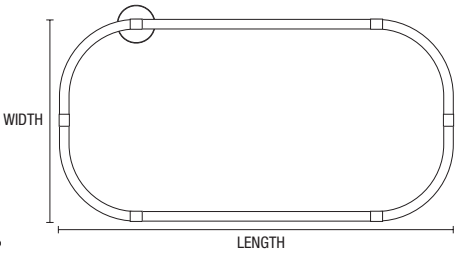

System	Type	Wattage	Width*	Length*	Color Temperature	Finish
RESDP	C	3W	24	48	30K	SN

System

RESEP Solina Rectangle Suspension End Feed with 8ft Adjustable Aircraft cables. and a 5" Round Canopy with Power

RESDEP Solina Rectangle Suspension End Feed with 8ft Adjustable Aircraft cables and 4.6" Round Canopy. Powered by a 96W 24V 2-in-1 Dimmer & Power Supply

Type

C Cora Weave Lens in 1.2" Dia Rigid Tubing

D Diffused Lens in 1.2" Dia Rigid Tubing

Wattage

3W* 3 Watts per foot

5W 5 Watts per foot

*Only available in Static White color temperatures

Width*

24 24" Wide Rectangle

30 30" Wide Rectangle

36 36" Wide Rectangle

*Custom sizes available upon request.

Length*

48-102 For a 24" wide rectangle, select a length between 48-102"

60-102 For a 30" wide rectangle, select a length between 60-102"

72-96 For a 36" wide rectangle, select a length between 72-96"

*Custom sizes available upon request.
94" Max Length for 5W
64" Max Length for 7W

Color Temperature

24K 2400K Very Warm White

27K 2700K Incandescent White

27D 2700K Warm Dim, Dims to 1800K

30K 3000K Warm White

30D 3000K Warm Dim, Dims to 1800K

35K 3500K Neutral White

40K 4000K Cool White

Finish

BK Black

MW Matte White RAL 9003

SB Satin Brass

SN Satin Nickel

PN Polished Nickel

XX Custom*

*RAL/__ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering.

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PURE EDGE Pure Smart Lighting

PROJECT


FIXTURE TYPE

DATE

REV 09.03.26


MONOPOINT CANOPY OPTIONS

4" ROUND CANOPY

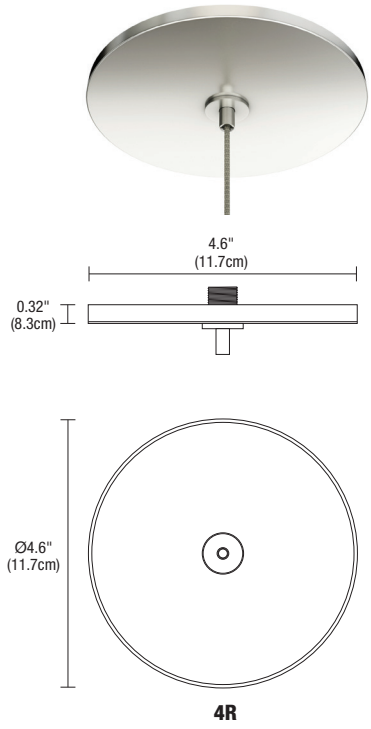


4R

5" ROUND 96W POWER CANOPY 120V TO 24V

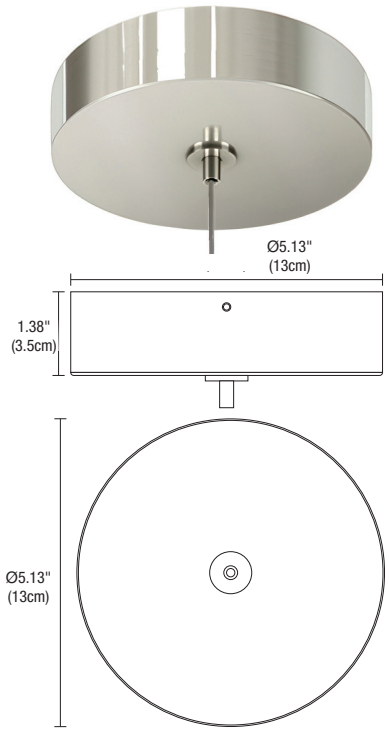


5RD PCEG-96W-24VDC-XX

12" RECTANGLE

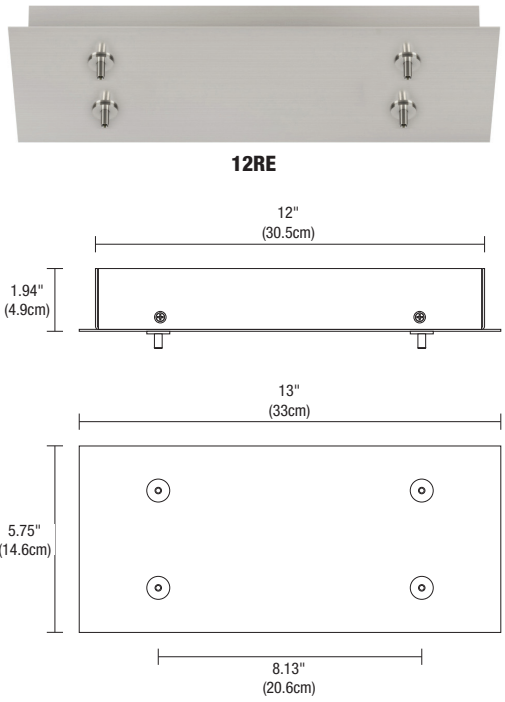

12RE

26" RECTANGLE

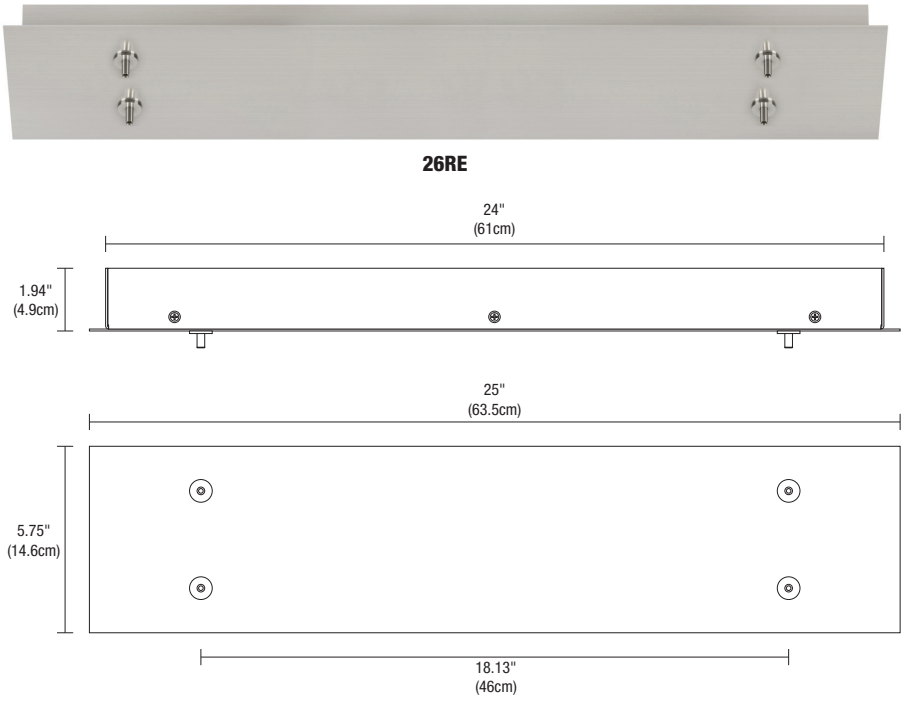

26RE

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PROJECT


FIXTURE TYPE

DATE

REV 09.03.26

4 Inch Canopy
(Not Included)





CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel suspension when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, and 4R Power Canopies (Canopy not included).


Product		Type		Finish
CS	–	ADJ-DP-SWAG	–	SN


CS Channel Suspension

ADJ-SWAG Adjustable Swag Hook for Static White
ADJ-DP-SWAG Dual Post Adjustable Swag Hook for 2K4K & RGB

SN Satin Nickel







CHANNEL SUSPENSION SWAG HOOK


The clear plastic Swag Hook extends a cable from a ceiling or an electrical box that is not located directly above desired fixture location.

System		Type
CS	–	SWAG


CS Channel Suspension

SWAG Swag Hook





Adjustable



Adjustable Power

CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP

Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Available in Satin Black or White with Satin Nickel Hardware as Adjustable Power and Non-Power versions.

Product		Type		Options		Finish
CS	–	TBAR	–	A	–	W

CS Channel Suspension

TBAR 9/16" and 15/16"

A Adjustable
AP Adjustable Power

W White
BK Satin Black

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PROJECT


FIXTURE TYPE

DATE


REV 09.03.26

WIRING DIAGRAM: 2-IN-1 WALL DIMMER AND POWER SUPPLY

For remodel applications, the same wires are used as from the Switch Box to the Jbox, hooked to the Power and Wall Dimmer.

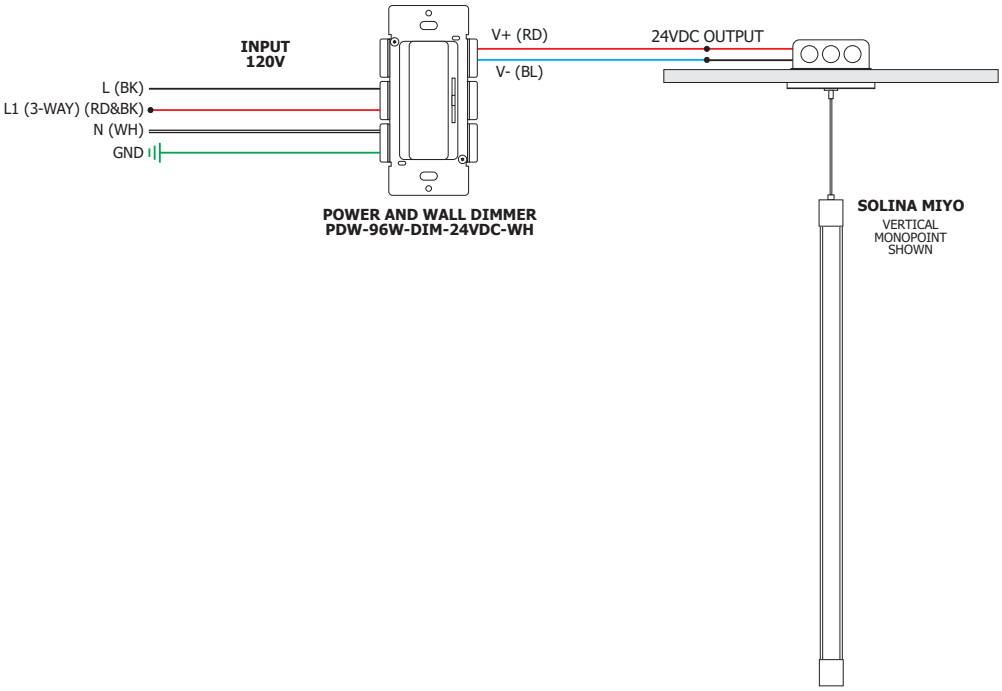

WIRING DIAGRAM: 5" CANOPY WITH POWER

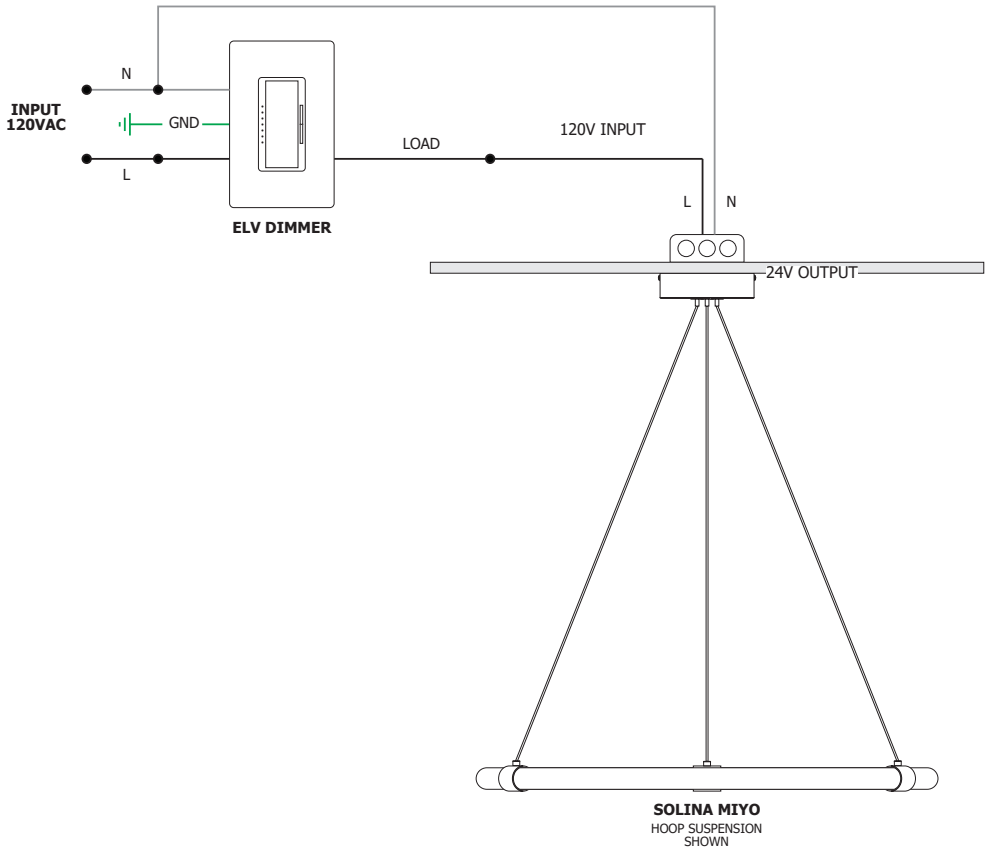

SOLINA 360 MIYO WITH POWER

24VDC, STATIC WHITE & WARM DIM

PROJECT

FIXTURE TYPE

DATE

REV 09.03.26

NOMINAL DELIVERED LUMENS

	1C CORA WEAVE FLEX - STATIC WHITE & WARM DIM																		
WATTS PER FOOT	3W					5W							7W						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	402	418	423	422	512	642	661	355	680	375	652	822	924	967	502	978	543	943	1183
LUMENS PER WATT (lm/w)	112	117	121	120	145	112	117	63	121	65	120	151	111	121	60	120	66	117	146
CRI	95	94	93	93	93	95	94	95	93	96	93	93	96	94	96	93	95	93	93

	1D DIFFUSED FLEX - STATIC WHITE & WARM DIM																		
WATTS PER FOOT	3W					5W							7W						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	459	476	482	481	584	732	754	405	775	428	743	937	1054	1103	572	1114	619	1074	1349
LUMENS PER WATT (lm/w)	128	133	138	137	166	128	133	71	138	74	137	172	126	138	69	137	75	133	167
CRI	95	96	93	93	93	95	94	95	93	96	93	93	96	94	96	93	95	93	93

LED STRIP TM30 DATA

24VDC, STATIC WHITE & WARM DIM

PROJECT

FIXTURE TYPE


DATE

REV 09.03.26

TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4


Color Vector Graphic



		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92	-2.4%	1.5%
2	94.7	-2.1%	-0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1


Color Vector Graphic



		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7


Color Vector Graphic



		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5


Color Vector Graphic



		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

LED STRIP TM30 DATA

24VDC, STATIC WHITE & WARM DIM

PROJECT

FIXTURE TYPE


DATE

REV 09.03.26

TM-30-15 DATA: The data below is for bare LED Warm Dim Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2700D | Rf: 90.7 | Rg: 101.1


Color Vector Graphic



		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.9	-4.1%	1.1%
2	91.8	-2.2%	3.2%
3	89.0	0.2%	5.0%
4	92.9	-1.1%	0.8%
5	93.9	1.1%	1.7%
6	93.3	3.3%	0.0%
7	93.1	-0.5%	-1.9%
8	97.2	-0.3%	-0.9%
9	93.4	-1.0%	3.2%
10	89.9	-0.1%	5.6%
11	87.0	4.7%	7.2%
12	89.2	5.8%	-0.2%
13	89.1	3.5%	-6.7%
14	86.3	4.1%	-9.2%
15	91.4	-2.0%	-3.6%
16	84.7	-2.1%	-10.3%

3000D | Rf: 90.6 | Rg: 101.1

Color Vector Graphic



		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	91.5	-3.5%	1.3%
2	92.2	-1.8%	3.0%
3	89.3	0.5%	4.8%
4	92.7	-1.1%	0.6%
5	93.3	0.5%	1.4%
6	93.8	2.7%	-0.8%
7	91.2	-2.1%	-0.2%
8	97.0	-0.5%	-0.7%
9	92.5	-0.7%	3.8%
10	88.3	0.9%	7.1%
11	87.5	3.9%	7.6%
12	88.2	6.2%	-0.2%
13	89.9	3.4%	-6.0%
14	86.9	4.4%	-8.5%
15	91.9	-1.9%	-2.9%
16	84.7	-1.3%	-10.6%