

SOLINA 360 MULTIPOINT TUNABLE WHITE

24VDC, VERTICAL PENDANT, POWER IN CANOPY

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 01.30.26



Cora Weave Lens & Satin Nickel

Diffused White Lens & Satin Nickel

DESCRIPTION

The Solina 360 Multipoint is a LED cylinder-shaped pendant with the choice between two versatile lens options: Diffused Rigid Tube for a modern neon glow aesthetic and Cora Weave Rigid Tube which showcases a textured glow with its woven cover. The Diffused 360° Lens and the Cora Weave 360° Lens provide clean, uninterrupted illumination in all directions and are available in 1' increments up to 8'. Includes 8' of field-cutable coaxial cable. Using the latest in LED Technology Tunable White 2000K-6500K (**2K6K**) or 2700K-6500K (**27K6**) grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 6500K (Day Light White). 2K6K is ideal for residential spaces including dining rooms, bedrooms, living spaces, and bathrooms by allowing the user to achieve a warm glow during the golden hours of the early mornings and evenings. For commercial environments, 27K6 promotes focus and alertness which is ideal for offices, healthcare and education, while still achieving warmer color temperatures best for hospitality and retail environments. For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

LAMPING


- Tunable White: 2000K-6500K (**2K6K**) or 2700K-6500K (**27K6**) grants independent control for adjusting color temperature and intensity
- 50,000 Hour Lamp Life

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)


- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)
- [0-10V](#) Requires two dimmers, one for intensity and one for color temperature
- [DMX & Controls](#)
- [DALI/DALI-2](#)

*In-Wall Mounting and drop ceiling Kits available for select power supplies

FINISH

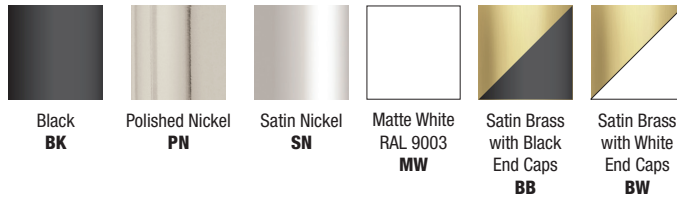

Diffused White or Cora Lens

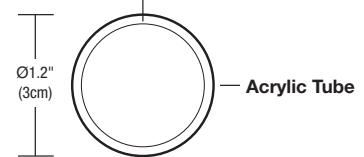

System	Ports	Wattage	Canopy*	Nominal Length in Feet*	Color Temperature	Finish
3SVP	C	5W	3PRD	8	2K6K	BK
3SVP Solina 360 Vertical Multipoint Pendant with Power	C Solina 1.2" Clear Straight Tube, 1" Cora 360 inside tube D Solina 1.2" Clear Straight Tube, 1" Diffused Flex 360 inside tube	5W 5 watts	3PRD 3 Port 8" Round Canopy with Power 2PRE 2 Port 12" Rectangle with Power 3PRE 3 Port 12" Rectangle with Power 5PRD 5 Port 12" Round Canopy with Power	1-8 Order in 1' increments from 1-8'	2K6K Tunable White 2000K-6500K 27K6 Tunable White 2700K-6500K	BK Black PN Polished Nickel SN Satin Nickel MW Matte White RAL 9003 BW Satin Brass w/ White Canopy BB Satin Brass w/ Black Canopy XX Custom**

*Custom sizes available via request

**Custom sizes available via request; 24", 36", and 42"

**RAL/... Specify RAL powder coat code (EX: #RAL/9007) Additional finishes are available with an extended lead time. Custom quote is required prior to ordering.

LAMP DATA

	2K6K																	
DESCRIPTION	360° CORA WEAWE LENS (C)									360° DIFFUSED LENS (D)								
WATTS PER FOOT	5 Watts									5 Watts								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	153	155	157	159	161	165	181	194	208	173	176	178	180	183	188	205	221	236
LUMENS PER WATT (lm/w)	41	39	39	40	40	41	90	49	58	47	44	45	45	46	47	90	55	66
CRI	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+

	27K6													
DESCRIPTION	360° CORA WEAWE LENS (C)								360° DIFFUSED LENS (D)					
WATTS PER FOOT	5 Watts								5 Watts					
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	166	197	203	208	227	245	233	188	223	229	235	257	277	264
LUMENS PER WATT (lm/w)	42	39	41	42	45	49	58	47	45	46	47	51	55	66
CRI	94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+



SOLINA 360 MULTIPOINT TUNABLE WHITE

24VDC, VERTICAL PENDANT, POWER IN CANOPY



REV 01.30.26

RECTANGLE MULTIPOINT CANOPY OPTIONS

2 Port Rectangle - 2PRE

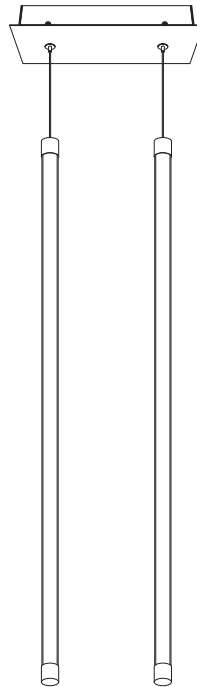
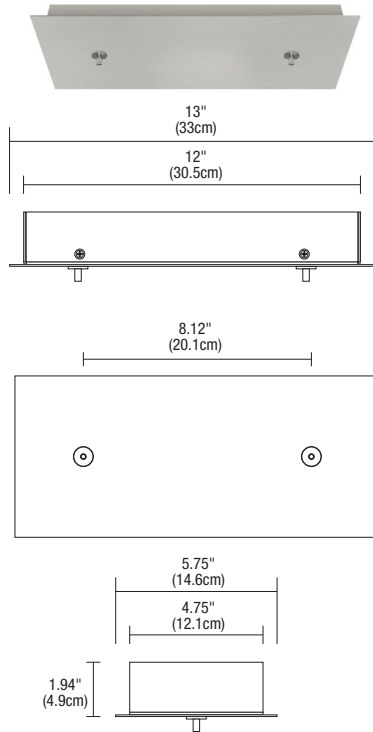


3 Port Rectangle - 3PRE

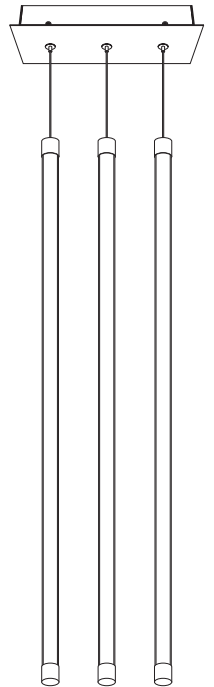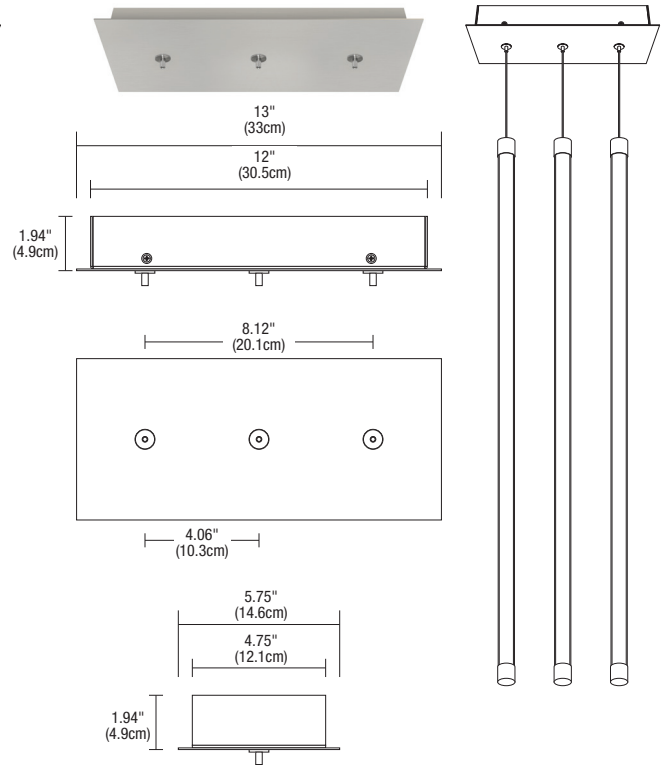

ROUND MULTIPOINT CANOPY OPTIONS

3 Port Round - 3PRD

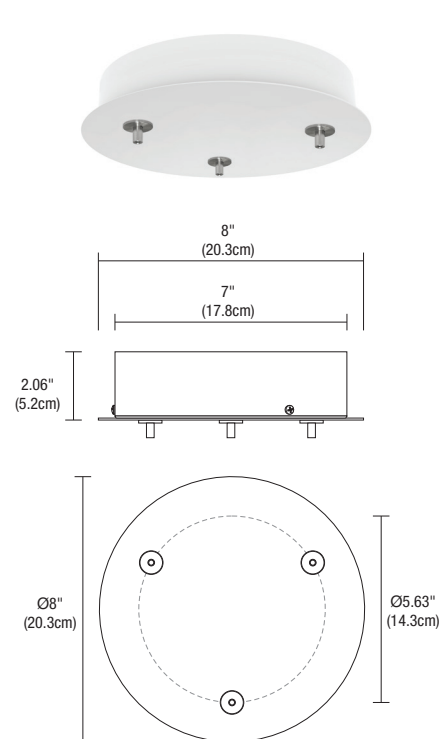

5 Port Round - 5PRD

