



# VANISHING POINT 12VAC MONOPOINT

## FAST JACK CEILING CONNECTION SYSTEM




DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING


REV 04.18.25



**VR-FJ12-WH**  
Vanishing Point .5" Opening Plaster-In, Remote Power supply (Order separately)

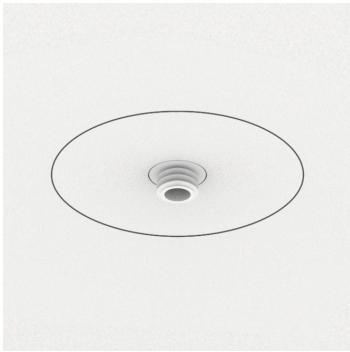

**V2P-FJ12-WH**  
Vanishing Point 2" Flush Canopy to dry wall, with ELV power supply in J-Box

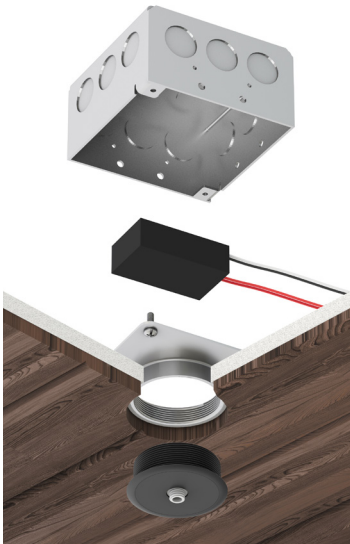

**V2MP-FJ12-BZ**  
Vanishing Point 2" Flush Canopy for Millwork Ceiling, with ELV power supply in J-Box

### DESCRIPTION

The Vanishing Point 12VAC Fast Jack Connection System comes in four distinct mounting options. Drywall and Millwork applications. 12V Fast Jack Lighting Fixtures, Controls, and Remote Power Supplies Sold Separately.

### MOUNTING OPTIONS

**VR** - NO visible canopy you only see the 0.5" fixture stem Vanish Into the Ceiling, can feed power up to 6 fixtures with a 60 Watt Class 2 (Remote Power Supply within 15ft), or up to 30 fixtures using a 300 Watt (Remote Power Supply not included, see page 8 for ordering information).

**V2P** - Included ELV Power Supply fits within included J-Box. Slight outline of the 2.0" round canopy will be visible. With Power.

### MILL-WORK FLUSH-MOUNT CANOPY SYSTEM OPTIONS

**V2MR** - Millwork flush mount 2.0" Round Canopy sits flush with a Millwork ceiling for a clean look. Can feed up to 30 fixtures with Remote Power Supply not included. See page 8 for ordering information.

**V2MP**- Millwork flush mount 2.0" Canopy with ELV Power Supply included within J-Box. Round Canopy sits flush with a Millwork ceiling for a clean look. With Power.

### CONNECTION TYPES

**FJ12** - Fast Jack 12VAC Connection

### WARRANTY / LABELS

Prorated 5 year warranty. Assembled in America  
ETL (Conforms to UL1598 and CSA 22.2 #250.0)


System		Type/Voltage	Finish
<b>VR</b>		<b>FJ12</b>	<b>WH</b>
<b>VR*</b>	Vanishing Point 0.5" Connection Drywall, No Outline of Canopy at connection point. Remote Power Supply	<b>FJ12</b> Fast Jack 12VAC Connection	<b>WH</b> White
<b>V2P*</b>	Vanishing Point 2.0" Connection Drywall flush mount canopy outline will show. ELV power supply included with J-Box		<b>BK</b> Black
<b>V2MR</b>	Vanishing Point 2.0" Millwork Flush-Mount Canopy, Remote Power Supply.		<b>SN</b> Satin Nickel
<b>V2MP</b>	Vanishing Point 2.0" Flush-Mount Canopy, ELV 60W Power Supply fits in J-box, for use with Mill-Work		<b>BZ</b> Bronze
*White Finish Only			

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# VANISHING POINT 12VAC MONOPOINT FAST JACK CEILING CONNECTION SYSTEM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 04.18.25

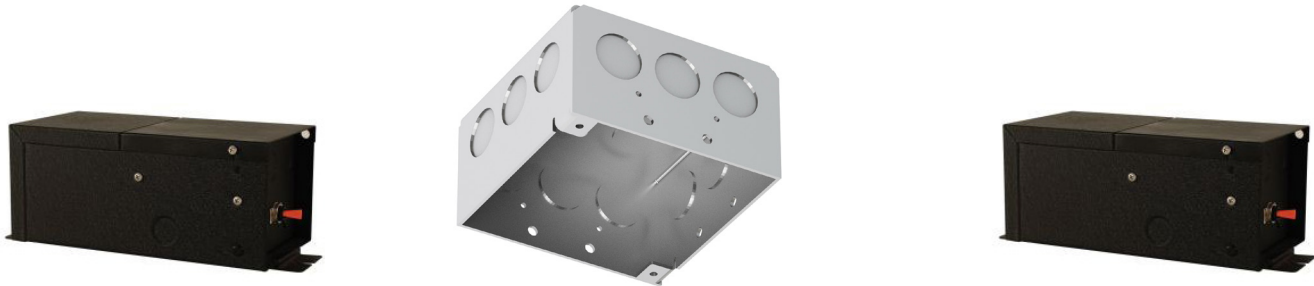

To Remote Power Supply (not included, see page 8)

To Remote Power Supply (not included, see page 8)



**VR-FJ**  
Vanishing Point Flush to dry wall, plaster in and paint, with Remote Power

**V2P-FJ**  
Vanishing Point 2" Flush Canopy to dry wall, plaster in and paint, with ELV power supply in J-Box

**V2MR-FJ**  
Vanishing Point 2" Flush Canopy for Millwork with Remote Power

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



# PISTON

## FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING


REV 04.18.25



FJ-PST-SP-1-30K-SN  
Satin Nickel



FJ-PST-SP-1-30K-WH  
White

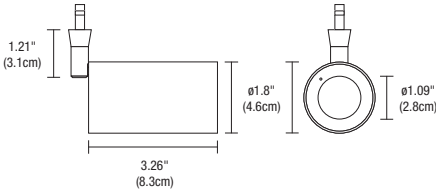

System	Fixture	Head / Beam Spread Lens	Stem Height	Color Temperature	Finish
<b>FJ</b>	<b>PST</b>	<b>SP</b>	<b>1</b>	<b>30K</b>	<b>SN</b>
FJ Fast Jack (Connector only)	PST Piston	SP Spot 15° NF Narrow Flood 25° FL Flood 35° WF Wide Flood 45°	1 1" (2.5cm)	30K 3000K Warm White	SN Satin Nickel WH White



# REBEL

## FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING


REV 04.18.25



FJ-REB-1-SN  
Satin Nickel



FJ-REB-1-BZ  
Antique Bronze

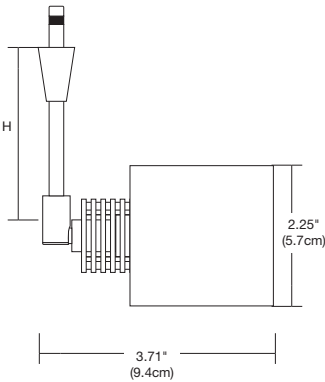

System	Fixture	Stem Height	Finish
<b>FJ</b>	<b>REB</b>	<b>1</b>	<b>SN</b>
FJ Fast Jack	REB Rebel	1 1.2" (2.5cm) 6 6" (15.2cm)	BZ Antique Bronze SN Satin Nickel

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



# BUBBLE BALL

## FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING




REV 04.18.25



FJ-BBCL-10FT-12-SN  
Clear



FJ-BBBL-10FT-12-SN  
Blue

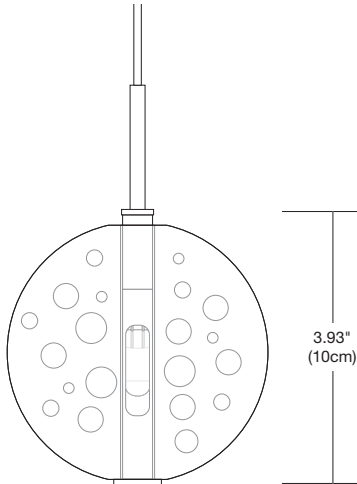

3.93"  
(10cm)

System	Shade	Cable / Cord	Voltage	Finish
<b>FJ</b>	<b>BBCL</b>	<b>10FT</b>	<b>12</b>	<b>SN</b>
FJ Fast Jack	BBCL Bubble Ball Clear BBBL Bubble Ball Blue	10FT 10 ft. 20FT 20 ft. 30FT 30 ft.	12 12 Volt	SN Satin Nickel



# SALUTI

## FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING



REV 04.18.25




FJ-SALUTI-SM-GY-SN  
Small (3" diameter) Gray




FJ-SALUTI-MD-CR-SN  
Medium (4" diameter) Crystal




FJ-SALUTI-LG-GY-SN  
Large (5.5" diameter) Gray

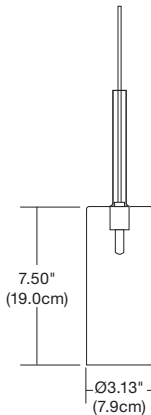

Small

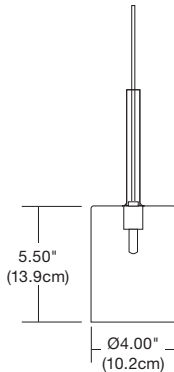

Medium



Large

System	Shade	Size	Lamp	Glass Color	Finish
<b>FJ</b>	<b>SALUTI</b>	<b>SM</b>	<b>L1</b>	<b>GY</b>	<b>SN</b>
FJ Fast Jack	SALUTI Saluti	SM Small (3" diameter) MD Medium (4" diameter) LG Large (5.5" diameter)	L1 LED	CR Crystal GY Gray	SN Satin Nickel


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



### MR16 LOUVER LENS HOLDER

MR16 Louver Lens Holders secure onto the front of the MR16 lamp holding up to two Lenses or a combination of a Hexcell Louver and Lens. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.

Accessory	Finish
<b>LH16</b>	<b>SN</b>
<b>LH16</b> Louver Lens Holder	<b>BK</b> Black <b>BZ</b> Antique Bronze <b>SN</b> Satin Nickel



### MR16 HEXCELL LOUVER

MR16 Hexcell Louver Accessory eliminates glare. 2 inch diameter x .125 inch thick. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.

Accessory
<b>L016-H</b>
<b>L016-H</b> MR16 Hexcell Louver



ST16-SN




STB16-BK

### SNOOT

The Snoot prevents glare and focuses the projected light from the lamp. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.


Accessory	Finish
<b>ST16</b>	<b>SN</b>
<b>ST16</b> Straight Snoot MR16 <b>STB16</b> Conical Snoot MR16	<b>BK</b> Black <b>BZ</b> Antique Bronze <b>SN</b> Satin Nickel



### FILM LENS SOFT FOCUS

SF Soft Focus diffuses a beam pattern to provide even illumination. LS Linear spread lens directs 10°, 15°, 25° beams into an elongated shape. This is typically used in long rectangle paintings and art work, 35°, 40°, 60° lamps produce an elongated oval shape used in art work and wall washing. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.





Film Size	Film Type
<b>LF2.0</b>	<b>SF</b>
<b>LF2.0</b> 2.0" Film	<b>SF</b> Soft Focus <b>LS</b> Linear Spread



### 2" ROUND GLASS OPTICAL LENS

The soft focus lens reduces lamp glare, spread lenses elongate and diffuser lenses diffuse the light beam. UV filter lens allows quality light to pass through while blocking the ultra violet radiation. Compatible with Rebel Head.

Lens	Optical Type
<b>L16</b>	<b>SF</b>
<b>L16</b> MR16 Lens	<b>F</b> Frost <b>SF</b> Soft Focus <b>MD</b> Medium Diffuser <b>WD</b> Wide Diffuser <b>WDF</b> Wide Diffuser Frost <b>LS</b> Linear Spread <b>LSF</b> Linear Spread Frost <b>UV</b> UV Glass





### 2" ROUND DICHROIC GLASS LENS

Dichroic lenses operate on a passive-reflective basis, reflecting unused wavelengths while allowing desired portions of the spectrum to pass through. Dichroics are high in transmission, producing brighter, cleaner, saturated colors. Compatible with Rebel Head.

Lens	Dichroic Color
<b>L16</b>	<b>SF</b>
<b>L16</b> MR16 Lens	<b>RD</b> Red <b>YL</b> Yellow <b>GR</b> Green <b>CW</b> Cool White (3100K-4250K) <b>BL</b> Blue <b>PH</b> Peach <b>DP</b> Dark Pink <b>MG</b> Magenta

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



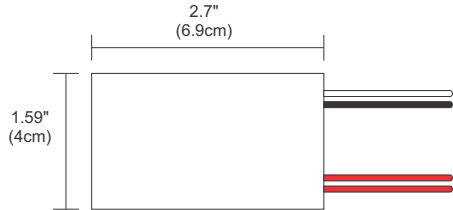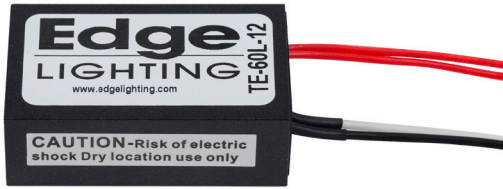


**REMOTE 60W 12VAC CLASS 2 POWER SUPPLY**

TE-60L-12 60 Watt 12VAC Electronic Transformer converts 120 volt line voltage to 12 volts and features built-in short-circuit protection. The solid, lightweight remote power supply fits inside a standard electrical junction box behind a power feed canopy. Must be in an accessible location or inside an electrical box. Must be within 10' of lamp, max six 9 watt fixtures.

- No load technology, works with LED AC loads
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meets UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable with ELV dimmer

System	Power	Voltage Output
<b>TE</b>	<b>60L</b>	<b>12</b>
TE Transformer Electronic	60L 60 Watts	12 12 Volt AC

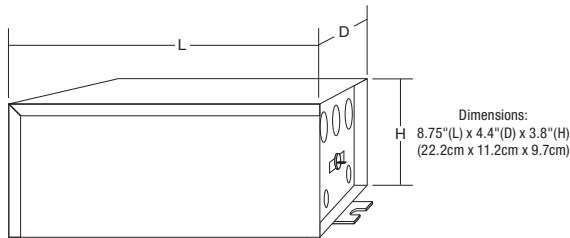

**REMOTE MAGNETIC TRANSFORMER UL2108**  
**150W AND 300W 12VAC POWER SUPPLY (SOLD SEPARATELY)**

The 150 watt or 300 watt 12 Volt Remote Magnetic Transformer converts 120VAC line voltage into 12VAC low voltage power and are protected by fast-acting circuit breakers. The low voltage output powers the Vanishing Point System up to 300 watts using LED MR16 12V lamps, 8 watts max per connection. Power up to 30 Vanishing Point fixtures using a single power supply at 300 Watts and 8 Watts per Lamp. Dimmable with Magnetic Low Voltage Dimmer sold separately.

System	Power	Voltage Output
<b>T</b>	<b>300</b>	<b>12</b>
T Transformer Magnetic	150 150 Watt Magnetic Remote Transformer 300 300 Watt Magnetic Remote Transformer	12 12 Volt AC

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--