

VANISHING POINT 12VAC MONOPOINT FAST JACK CEILING CONNECTION SYSTEM


DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 02.06.20



VR-FJ12-WH

Vanishing Point .5" Opening Plaster-In, Remote Power supply (Order separately)

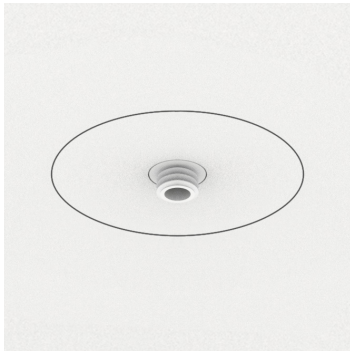

V2P-FJ12-WH

Vanishing Point 2" Flush Canopy to dry wall, with ELV power supply in J-Box



V2MP-FJ12-BZ

Vanishing Point 2" Flush Canopy for Millwork Ceiling, with ELV power supply in J-Box

DESCRIPTION:

The Vanishing Point 12VAC Fast Jack Connection System comes in four distinct mounting options. Drywall and Millwork applications. 12V Fast Jack Lighting Fixtures, Controls and Remote Power Supplies Sold Separately.

MOUNTING OPTIONS:

VR - NO visible canopy you only see the 0.5" fixture stem Vanish Into the Ceiling, can feed power up to 6 fixtures with a 60 Watt Class 2 (Remote Power Supply within 15ft), or up to 30 fixtures using a 300 Watt (Remote Power Supply not included, see page 8 for ordering information).

V2P - Included ELV Power Supply fits within included J-Box. Slight outline of the 2.0" round canopy will be visible. With Power.

MILL-WORK FLUSH-MOUNT CANOPY SYSTEM OPTIONS:



V2MR - Millwork flush mount 2.0" Round Canopy sits flushed with a Millwork ceiling for a clean look. Can feed up to 30 fixtures with Remote Power Supply not included, see page 8 for ordering information.

V2MP - Millwork flush mount 2.0" Canopy with ELV Power Supply included within J-Box. Round Canopy sits flushed with a Millwork ceiling for a clean look. With Power.

CONNECTION TYPES:

FJ12 - Fast Jack 12VAC Connection

WARRANTY / LABELS:

Prorated 5 year warranty. Assembled in America
ETL (Conforms to UL1598 and CSA 22.2 #250.0) 
Title 24 

System	Type/Voltage	Finish
VR	FJ12	WH
VR Vanishing Point 0.5" Connection Drywall, No Outline of Canopy at connection point. Remote Power Supply V2P Vanishing Point 2.0" Connection Drywall flush mount canopy outline will show. ELV power supply included with J-Box V2MR Vanishing Point 2.0" Millwork Flush-Mount Canopy, Remote Power Supply. V2MP Vanishing Point 2.0" Flush-Mount Canopy, ELV 60W Power Supply fits in J-BOX, for use with Mill-Work	FJ12 Fast Jack 12VAC Connection	WH* White BK Black (V2MR & V2MP only) SN Satin Nickel (V2MR & V2MP only) BZ Bronze (V2MR & V2MP only) *White not available in Mill-Work


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VANISHING POINT 12VAC MONOPOINT


FAST JACK CEILING CONNECTION SYSTEM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING


REV 02.06.20




To Remote Power Supply (not included, see page 8)




TE-60L-12 Power Supply fits in J-Box




To Remote Power Supply (not included, see page 8)



VR-FJ
Vanishing Point Flush to dry wall, plaster in and paint, with Remote Power

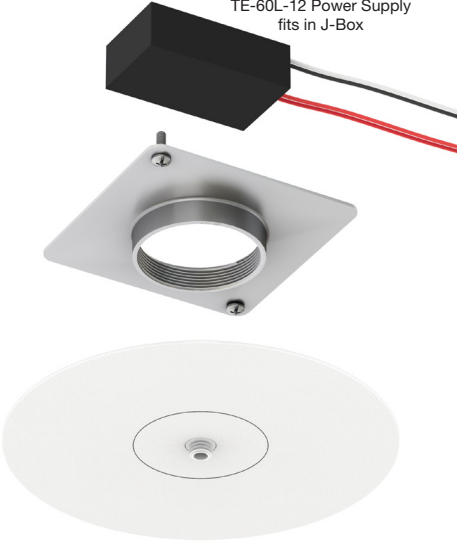

V2P-FJ
Vanishing Point 2" Flush Canopy to dry wall, plaster in and paint, with ELV power supply in J-Box



V2MR-FJ
Vanishing Point 2" Flush Canopy for Millwork with Remote Power

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PISTON

FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING


REV 02.06.20



FJ-PST-SP-1-30K-SN
Satin Nickel



FJ-PST-SP-1-30K-WH
White

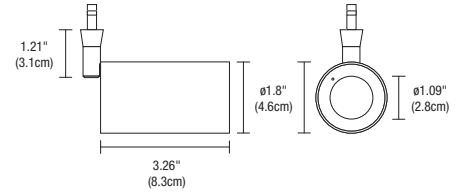

System	Fixture	Head / Beam Spread Lens	Stem Height	Color Temperature	Finish
FJ	PST	SP	1	30K	SN
FJ Fast Jack (Connector only)	PST Piston	SP Spot 15° NF Narrow Flood 25° FL Flood 35° WF Wide Flood 45°	1 1" (2.5cm)	30K 3000K Warm White	SN Satin Nickel WH White

REBEL

FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 02.06.20




FJ-REB-1-SN
Satin Nickel



FJ-REB-1-BZ
Antique Bronze



FJ-REB-1-WH
White

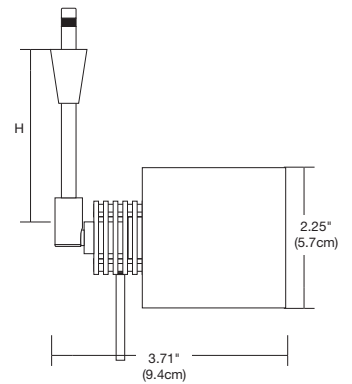

System	Fixture	Stem Height	Finish
FJ	REB	1	SN
FJ Fast Jack	REB Rebel	1 1.2" (2.5cm) 6 6" (15.2cm)	BZ Antique Bronze* SN Satin Nickel WH White* *Only in 1"

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



CHOPPER


FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 02.06.20



FJ-CHO-1-BZ-LH16-BZ
Antique Bronze with Antique
Bronze Louver Lens Holder

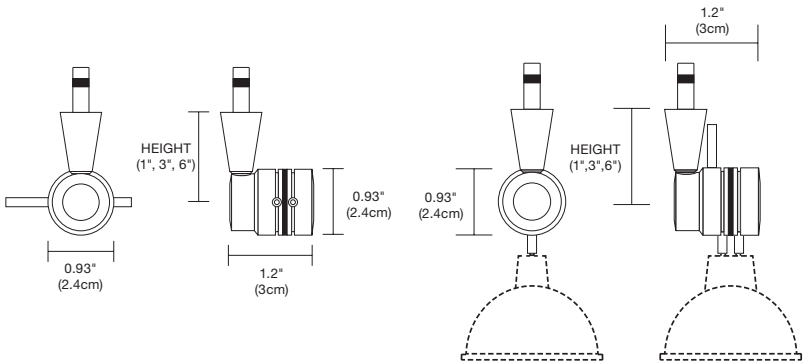

System	Fixture	Stem Height	Finish
FJ	CHO	1	BZ
FJ Fast Jack	CHO Chopper	1 1.2\" (2.5cm) 3 3\" (7.6cm)	BZ Antique Bronze



SPIRIT


FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 02.06.20



FJ-SPI-3-SN-S1-SN
Fast Jack Spirit with S1-SN, Little Solid
Shade Accessory in Satin Nickel.

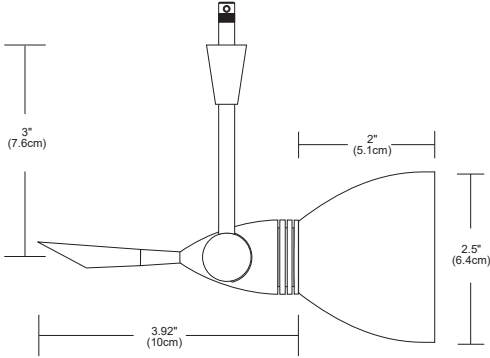

Fast Jack Spirit connects to any
Vanishing Point FJ12 Connector

System	Fixture	Stem Height	Finish	Shade	Shade Finish
FJ	SPI	3	SN	S1	SN
FJ Fast Jack	SPI Spirit	3 3\" (7.6cm) 6 6\" (15.2cm)	SN Satin Nickel	S1 Little Solid Shade Accessory	SN Satin Nickel

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



LOW RIDER

FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING






REV 02.06.20



FJ-LOW-1-SN-S1-SN
Satin Nickel with
Satin Nickel S1 Shade



FJ-LOW-1-BZ-S2-BZ
Antique Bronze with
Antique Bronze S2 Shade

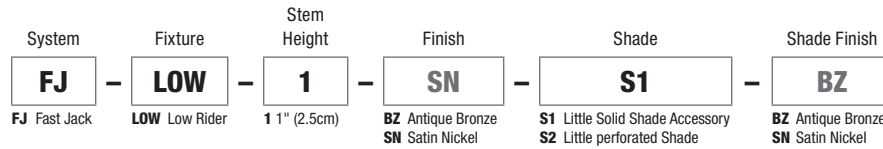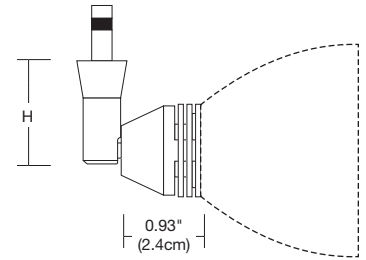

SCOPE

FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING



REV 02.06.20



FJ-SCO-1-PN
Polished Nickel






FJ-SCO-1-BZ
Antique Bronze



FJ-SCO-1-WH
White



FJ-SCO-1-SN
Satin Nickel

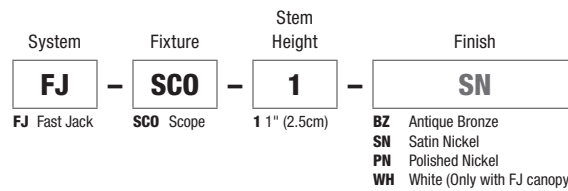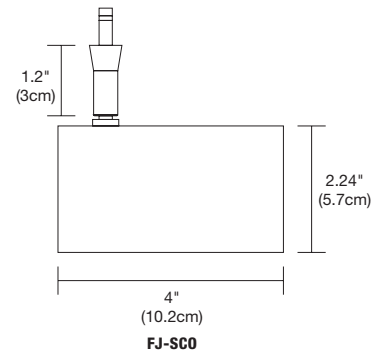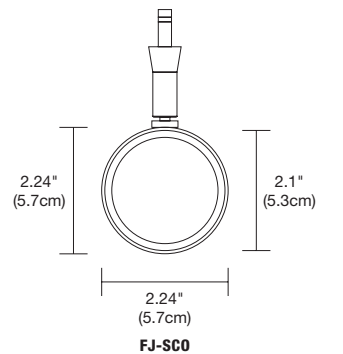

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



SALUTI

FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 02.06.20




FJ-SALUTI-SM-GY-SN
Small (3" diameter) Gray




FJ-SALUTI-MD-CR-SN
Medium (4" diameter) Crystal




FJ-SALUTI-LG-GY-SN
Large (5.5" diameter) Gray

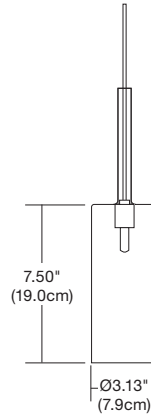


Small

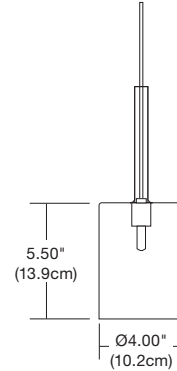

Medium



Large

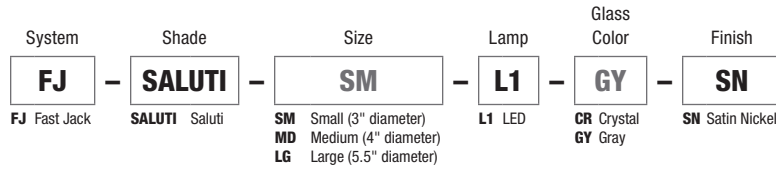

BUBBLE BALL

FJ12 VANISHING POINT CONNECTOR

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING



REV 02.06.20



FJ-BBCL-10FT-12-SN
Clear



FJ-BBBL-10FT-12-SN
Blue

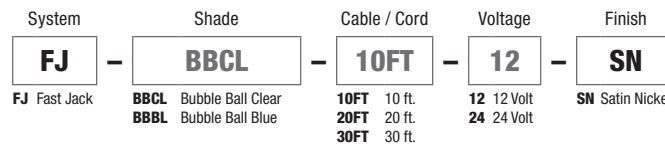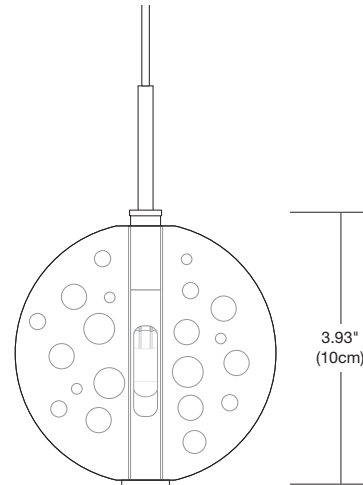

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VANISHING POINT 12VAC MONOPOINT FAST JACK CEILING CONNECTION SYSTEM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING


REV 02.06.20



MR16 LOUVER LENS HOLDER

MR16 Louver Lens Holders secure onto the front of the MR16 lamp holding up to two Lenses or a combination of a Hexcell Louver and Lens. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.

Accessory		Finish
LH16	-	SN
LH16 Louver Lens Holder		SN Satin Nickel BZ Antique Bronze BK Black



MR16 HEXCELL LOUVER

MR16 Hexcell Louver Accessory eliminates glare. 2 inch diameter x .125 inch thick. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.

Accessory
L016-H
L016-H MR16 Hexcell Louver



ST16-SN



STB16-BK

SNOOT

The Snoot prevents glare and focuses the projected light from the lamp. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.


Accessory		Finish
ST16	-	SN
ST16 Straight Snoot MR16 STB16 Conical Snoot MR16		SN Satin Nickel BZ Antique Bronze BK Black



FILM LENS SOFT FOCUS

SF Soft Focus diffuses a beam pattern to provide even illumination. LS Linear spread lens directs 10°, 15°, 25° beams into an elongated shape. This is typically used in long rectangle paintings and art work, 35°, 40°, 60° lamps produce an elongated oval shape used in art work and wall washing. Compatible with Chopper, Spirit, Low Rider, and Rebel heads.




Film Size		Film Type
LF2.0	-	SF
LF2.0 2.0" Film		SF Soft Focus LS Linear Spread



2" ROUND GLASS OPTICAL LENS

The soft focus lens reduces lamp glare, spread lenses elongate and diffuser lenses diffuse the light beam. UV filter lens allows quality light to pass through while blocking the ultra violet radiation. Compatible with Rebel Head.

Lens		Optical Type
L16	-	SF
L16 MR16 Lens		F Frost SF Soft Focus MD Medium Diffuser WD Wide Diffuser WDF Wide Diffuser Frost LS Linear Spread LSF Linear Spread Frost UV UV Glass



2" ROUND DICHROIC GLASS LENS

Dichroic lenses operate on a passive-reflective basis, reflecting unused wavelengths while allowing desired portions of the spectrum to pass through. Dichroics are high in transmission, producing brighter, cleaner, saturated colors. Compatible with Rebel Head.



Lens		Dichroic Color
L16	-	RD
L16 MR16 Lens		RD Red YL Yellow GR Green CW Cool White (3100K-4250K) BL Blue PH Peach DP Dark Pink MG Magenta

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VANISHING POINT 12VAC MONOPOINT FAST JACK CEILING CONNECTION SYSTEM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 02.06.20

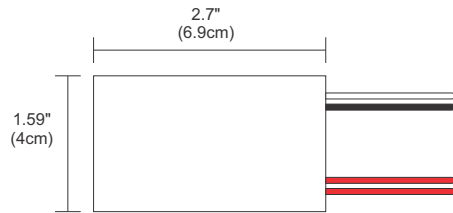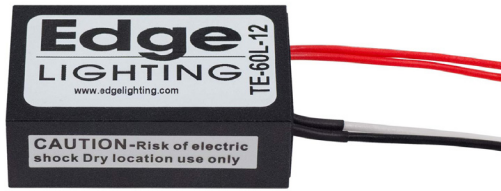


REMOTE 60W 12VAC CLASS 2 POWER SUPPLY

TE-60L-12-FIL 60 Watt 12VAC Electronic Transformer converts 120 volt line voltage to 12 volts and features built-in short-circuit protection. The solid, lightweight remote power supply fits inside a standard electrical junction box behind a power feed canopy. Must be in an accessible location or inside an electrical box. Must be within 10ft of lamp, max six 8 watt fixtures.

- No load technology, works with LED AC loads
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meets UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- Dimmable

System	Power	Voltage Output	Type
TE	60L	12	FIL
TE Transformer Electronic	60L 60 Watts	12 12 Volt AC LED and Halogen Only	FIL Filter

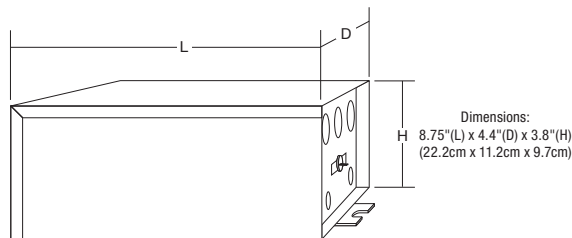

REMOTE MAGNETIC TRANSFORMER UL2108 150W AND 300W 12VAC POWER SUPPLY (SOLD SEPARATELY)

The 150 watt or 300 watt 12 Volt Remote Magnetic Transformer converts 120VAC line voltage into 12VAC low voltage power and are protected by fast-acting circuit breakers. The low voltage output powers the Vanishing Point System up to 300 watts using LED MR16 12V lamps, 8 watts max per connection. Power up to 30 Vanishing Point fixtures using a single power supply at 300 Watts and 8 Watts per Lamp. Dimmable with Magnetic Low Voltage Dimmer sold separately.

System	Power	Voltage Output
T	300	12
T Transformer Magnetic	150 150 Watt Magnetic Remote Transformer 300 300 Watt Magnetic Remote Transformer	12 12 Volt AC


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VANISHING POINT 12VAC MONOPOINT FAST JACK CEILING CONNECTION SYSTEM


DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING

REV 02.06.20

SOL LIGHT WARM DIM


Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	MR16-12V-8W-NF-27KWD-SL	8	97+	85	24	30,000	2700K dims to 1800K	390	50	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-FL-27KWD-SL	8	97+	85	36	30,000	2700K dims to 1800K	427	55	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-NF-30KWD-SL	8	97+	85	24	30,000	3000K dims to 1800K	410	53	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-FL-30KWD-SL	8	97+	85	36	30,000	3000K dims to 1800K	450	58	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50

SORAA BRILLIANT HIGH LUMEN 2700K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-827-H1*	8	90	80	10	35,000	8,000	575	77	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-827-H1	8	90	80	25	35,000	3,710	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-827-H1	8	90	80	36	35,000	1,550	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75


*Use with Snap Lens

SORAA VIVID 2700K COLOR TEMPERATURE INDOOR/OUTDOOR


Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10d-927-03*	8	95	95	10	35,000	5,710	390	52	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-927-03	8	95	95	25	35,000	2,260	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-927-03	8	95	95	36	35,000	1,070	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens

SORAA HEALTHY

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SH-MR16-07-36D-27-01-X2	8	80	90	36	25,000	1,020	400	53	12V +/- 1.2V	UL/CUL, FCC Title 47 Part 15B, RoHS	50

SORAA BRILLIANT HIGH LUMEN 3000K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-830-H1*	8	90	80	10	35,000	8,400	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-830-H1	8	90	80	25	35,000	3,300	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-830-H1	8	90	80	36	35,000	1,650	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75

*Use with Snap Lens

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


VANISHING POINT 12VAC MONOPOINT

FAST JACK CEILING CONNECTION SYSTEM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | US PATENT PENDING


REV 02.06.20

SORAA VIVID 3000K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-930-03*	8	95	95	10	35,000	6,000	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-930-03	8	95	95	25	35,000	2,400	435	58	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-930-03	8	95	95	36	35,000	1,130	435	58	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50


*Use with Snap Lens

SORAA VIVID 4000K COLOR TEMPERATURE INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-940-03*	8	95	95	10	35,000	6,290	430	57	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-940-03	8	95	95	25	35,000	2,510	455	61	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-940-03	8	95	95	36	35,000	1,190	455	61	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens

SATCO 3500K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	S8637	8	90+	N/A	15	25,000	6,290	430	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75
	S8642	8	90+	N/A	40	25,000	2,510	455	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75

8MR16/LED/40°/35K/90CRI/12V 8 watt; LED MR16; 3500K; 40° beam spread; GU5.3 base; 12 volts. Features: Silver back MR16 reflector. Direct replacements for 75 watt Halogen lamps - uses only 8 watts. Dimmable. No UV or IR radiation. Approved for enclosed fixtures*.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--