

VANISHING POINT TUBO LARGE WALL WASH

24VDC REMOTE POWER



VR

Vanishing Point .5" Opening Plaster-In, Remote Power supply (Order separately)



V2MR

Vanishing Point 2" Flush Canopy for Millwork, Remote Power supply (Order separately)

DESCRIPTION

The Vanishing Point Tubo Large Wall Wash is a 24VDC Plaster-In System with integrated LED offered in two distinct mounting options for drywall and millwork. The 15 watt track head with integral LED that features a wall wash lens, and is available in multiple color temperatures including Warm Dim (**30D**). The fixture flat-backed tube heat sink design has 360° horizontal and 90° vertical rotation providing maximum illumination and efficiency within a small package. Fixture includes a 5 year pro-rated warranty. Patent Pending.

DRYWALL APPLICATIONS (PLASTER-IN)

VR - No visible canopy line, just the small (0.5") point of connection where the Fast Jack disappears into the ceiling. 24V remote power supply (Order Separately).

MILLWORK APPLICATIONS

V2MR - Connection point at ceiling 2.0" canopy sits flush in Millwork for a clean look. 24V remote power supply (order separately).

SPECIFICATIONS

- Power Consumption: 15 watts
- Construction: Die Cast Aluminum
- Dimensions: Ø 2.34" Height 4.92"
- Color Rendering: COB Chromaticity range within a 2-step MacAdam Ellipse
- Average LED life: 60,000 hrs

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, CLASS 2 WIRING

- [Pure Smart™ WiZ Pro Power Supplies & Controls](#)
 - [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- *In-Wall Mounting and drop ceiling Kits available for select power supplies

APPLICATIONS

Designed for indoor use only in drywall and millwork. Ideal applications in Commercial, Retail, Residential, Hospitality, Education, and Healthcare Institutions.

LAMPING

TUBO WALL WASH	
BEAM ANGLE	55°
CCT	3128
TOTAL LUMENS	884
WATTS	15
LUMENS PER WATT (lm/w)	59
CRI	92
TM-30 DATA	R9: 61.2 Rf: 92 Rg: 100

LENS

Single optic lens gives a smooth uniform asymmetric wall wash beam spread.

WARRANTY / LABELS

Pro-rated 5 year warranty. Assembled in America , RoHS, ETL (Conforms to UL1598 and CSA 22.2 #250.0)

FINISH



Black
BK


White
WH

System	Fixture	Beam Spread Lens	Color Temperature	Finish
VR	TUBL	WW	30K	WH
VR Vanishing Point Drywall Plaster-in with .5" opening with Remote Power supply (order separately)	TUBL Tubo Large	WW Wall Wash	24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D 3000K Warm Dim 35K 3500K Neutral White	BK Black WH White
V2MR Vanishing Point 2" Flush canopy for Millwork, with Remote Power supply (ordered separately)				

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VANISHING POINT TUBO LARGE WALL WASH


24VDC REMOTE POWER

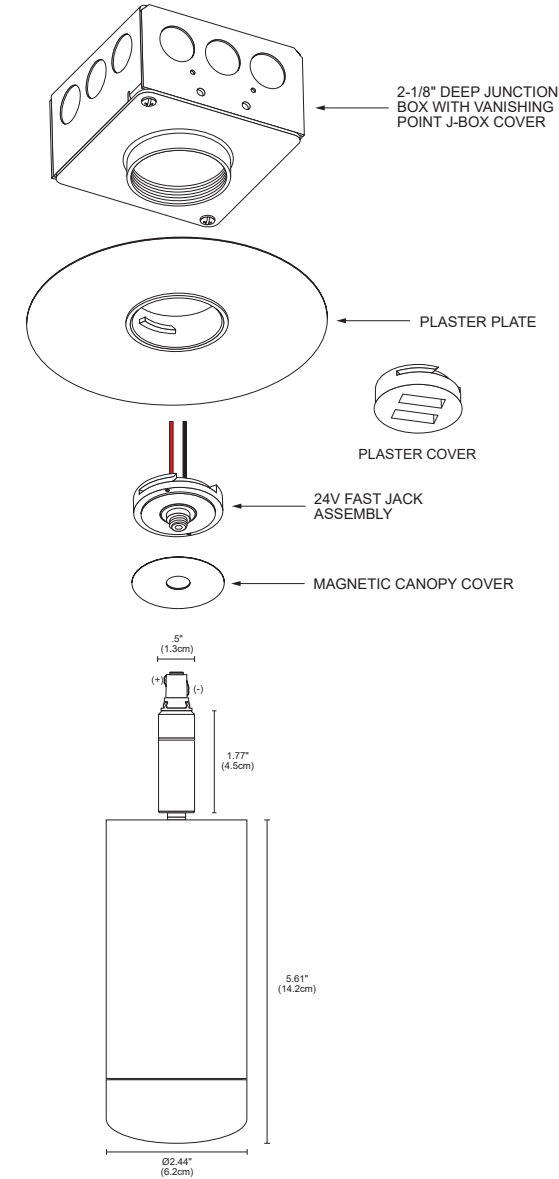

VR
Vanishing Point Plaster-in Flush to drywall with Remote Power (Sold separately)



V2MR
Vanishing Point 2" Magnetic Flush Canopy Cover for Millwork with Remote Power (Sold separately)

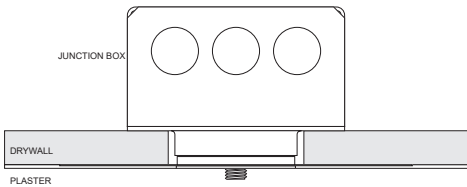

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--




VANISHING POINT TUBO LARGE WALL WASH

24VDC REMOTE POWER

TUBO WALL WASH Photometric Data

REV 08.01.22

D - Distance from fixture
FC - Initial foot candles at the center of beam
DIA - Diameter

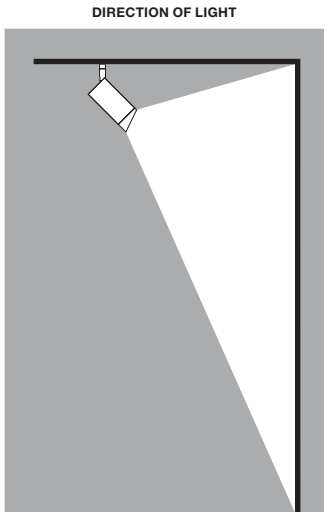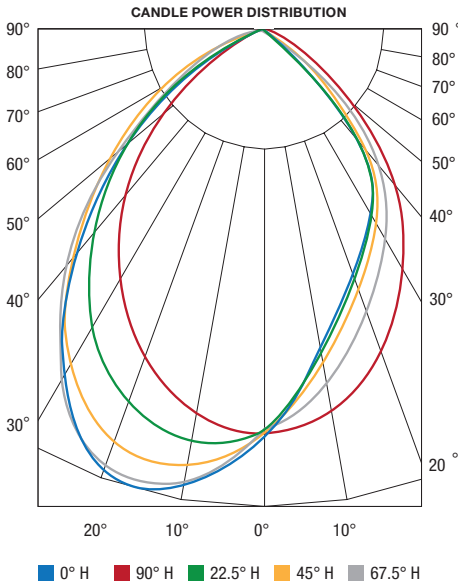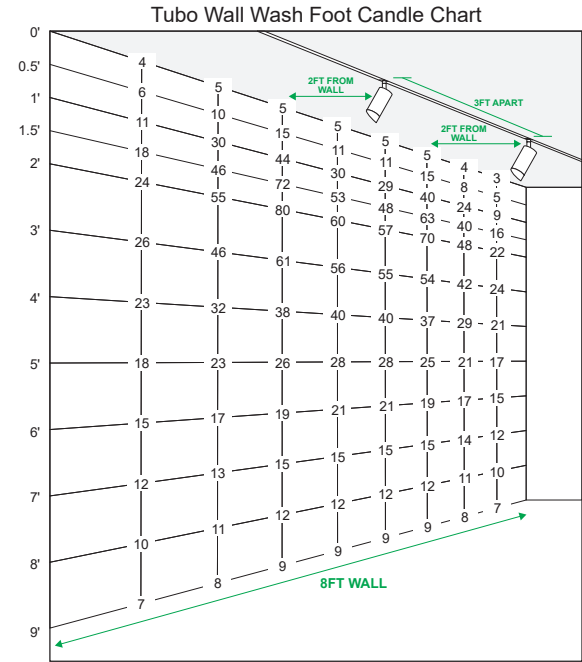

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


CEILING TM30 DATA

24VDC REMOTE POWER

TM-30-15 DATA: The data below is for Tubo. Consistent color temperatures among multiple track heads is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

3000D | Rf: 89.8 | Rg: 101.4

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--