


FAST JACK MULTI-PORT CANOPIES

REV.04.20.15

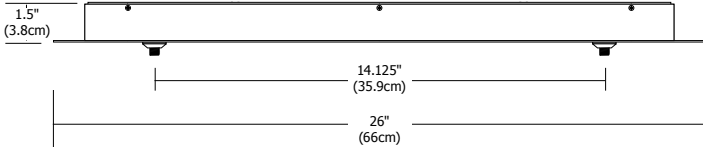


2 Port Linear Canopy

The 26" linear 2 port Fast Jack canopy mounts to a standard 4" electrical box with plaster ring or an octagon box. Maximum 75 watt load per port (total of 150 watts for halogen) or 40 watt load per port (total of 80 watts for LED). Halogen version is dimmable with electronic low voltage dimmer. **LED** dimming range varies: reference corresponding fixture specification sheets, at www.edgelighting.com, for dimming details. *LED version can also be used with maximum of 50 watt halogen load per port.

Weight:
7 lb (3.2kg)

System	Canopy	Type	Ports	Finish	Voltage Input
FJP	26RE	Halogen (leave blank)	2	SN	Standard 120V (leave blank)
FJP Fast Jack Power Feed	26RE 26" Rectangle	LED LED	2 2 Ports	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230V 50Hz 3 277V 60Hz (Halogen only)

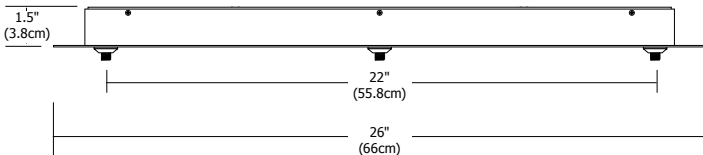

3 Port Linear Canopy

The 26" linear 3 port Fast Jack canopy mounts to a standard 4" electrical box with plaster ring or an octagon box. Maximum 75 watt load per port (total of 225 watts for halogen) or 40 watt load per port (total of 120 watts for LED). Halogen version is dimmable with electronic low voltage dimmer. **LED** dimming range varies: reference corresponding fixture specification sheets, at www.edgelighting.com, for dimming details.*LED version can also be used with maximum of 50 watt halogen load per port.

Weight:
8 lb (3.2kg)

System	Canopy	Type	Ports	Finish	Voltage Input
FJP	26RE	Halogen (leave blank)	3	SN	Standard 120V (leave blank)
FJP Fast Jack Power Feed	26RE 26" Rectangle	LED LED	3 3 Ports	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230V 50Hz 3 277V 60Hz (Halogen only)

PROJECT:

FIXTURE
TYPE:

DATE:

