

L3D0-96W24V-U LUTRON HI-LUME®

REV.03.31.17



Intertek



Class 2



Description:

The Hi-lume® Premier 0.1% Constant Voltage Driver (L3D0) is a high-performance LED driver capable of controlling up to 96 W of 24 V-constant voltage loads. This driver provides smooth and continuous dimming down to 0.1% low-end. It is ideal for use with strip lighting in applications such as coves, under or over cabinet lighting and pathway lighting. The driver is UL® Listed with an integrated wiring compartment and can be mounted up to 150 ft (45 m) away from the load.

Applications:

Indoor*

*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

Power Input:

120-277 volts AC, 60Hz

Power Output:



Class 2; 24 volts DC 1.67A

Dimensions:

10" x 5.5" x 2"

Dimmer Type:


Electronic Low Voltage Dimmer Lutron: Diva #DVELV-300P; Skylark #SELV-300P; Maestro #MAELV-600

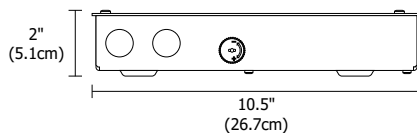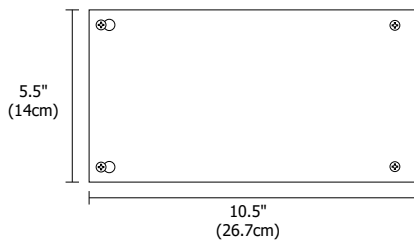

Ordering Code

L3D0-96W24V-U

L3D0-96W24V-U Lutron Hi-lume® Power Supply

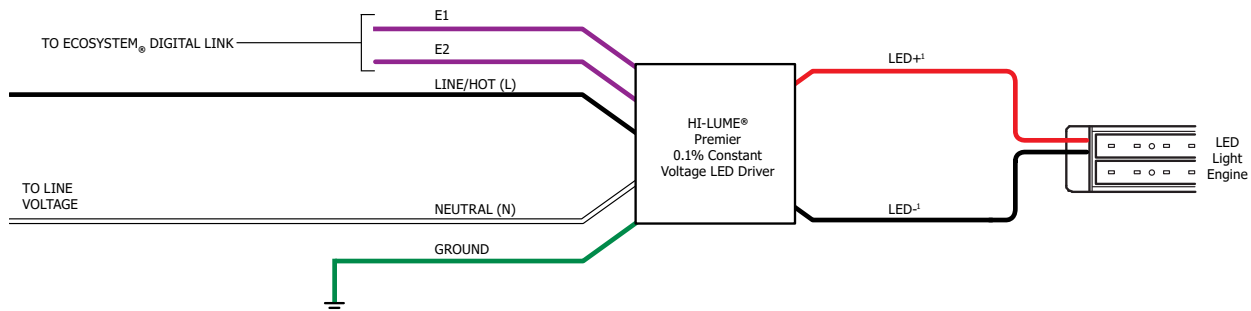

PROJECT:

FIXTURE
TYPE:

DATE:

