

Description:

Glide can be seamlessly integrated into Edge Lighting Monorail 2-Circuit systems. The fixture may be mounted to ceiling rails at a 90 degree angle with use of an included ceiling anchor. Glide Wood Up/Down is a linear LED lighting fixture that features direct and indirect flat, milky white (no LED spots) lens and an optional louver for the direct lens. At 15 watts per foot, the 12VAC fixtures contain very warm white or warm white 92+CRI LEDs. Fixture lengths are available from 36 to 120 inches. Includes corresponding mounting hardware. Glide features adjustable 12 foot cables for flexibility when mounting to the rail. Fixture includes 5 year warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

System Compatibility:

Monorail 2-Circuit

Applications:

Indoor - conference rooms, kitchens, dining rooms, architectural lighting, general lighting and retail

Lamp: 50,000 Hour Lamp Life

Version	Watts Per Foot (Including power supply)	Lumens		92+CRI 27K, 30K
		per Watt	per Foot	
14W	15W Up and Down	34	510	●
	7.5W Up	34	255	●
	7.5W Down	34	255	●


Lumen values are based on the 3000K LED test without louver.

System	Product	Wattage/Voltage	Nominal Size	Color Temperature	Wood Finish	Connector Finish
M2	GLUD	14W	36	27K	WM	SN
M2 Monorail 2-Circuit	GLUD Glide Up/Down GLUDB Glide Up/Down with Black Louver GLUDW Glide Up/Down with White Louver	14W 14 Watt 12 Volt AC (7.5 Watt Up and 7.5 Watt Down)	36 36" 48 48" 60 60" 72 72" 84 84" 96 96" 108 108" 120 120"	27K 2700K Very Warm White 30K 3000K Warm White	WM Wood Maple WN Wood Walnut WC Wood Cherry WO Wood White Oak WE Wood Espresso	SN Satin Nickel PN Polished Nickel BZ Antique Bronze

Fixture Finish:



Monorail Connector Finish:

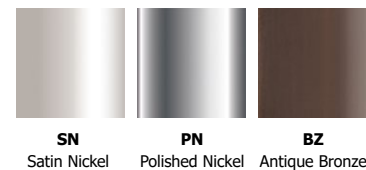

Louver Options





PROJECT: _____ FIXTURE TYPE: _____ DATE: _____



GLIDE WOOD UP/DOWN SUSPENSION FOR 2-CIRCUIT MONORAIL 120V/12VAC FIXTURE

REV.03.20.17

ASSEMBLED IN AMERICA

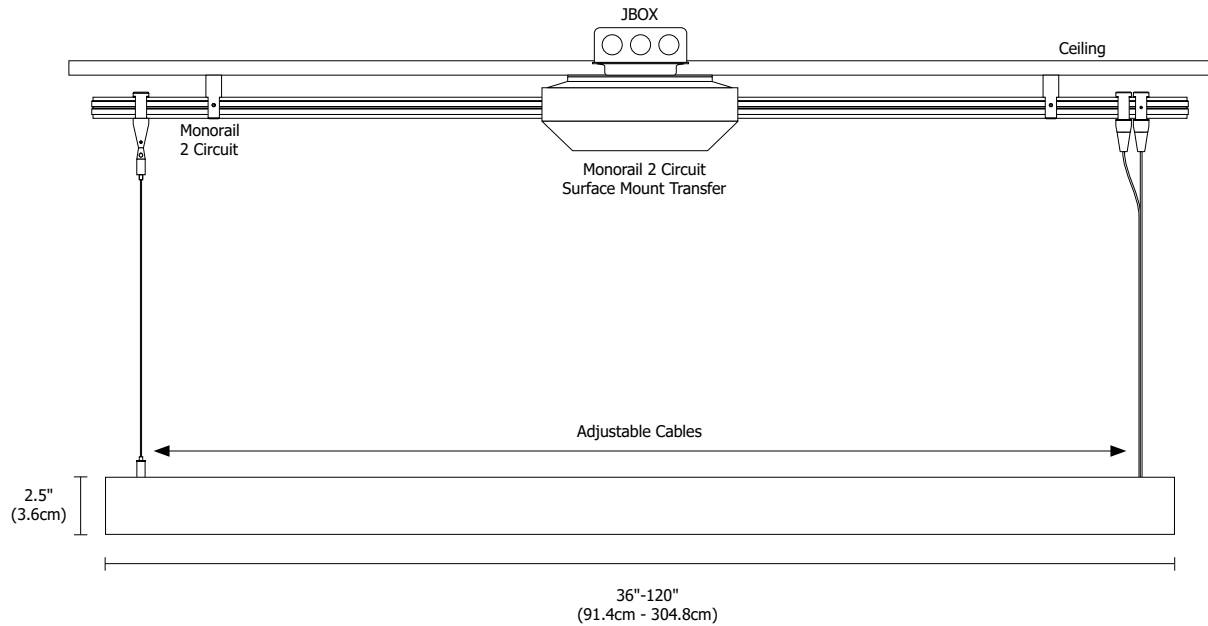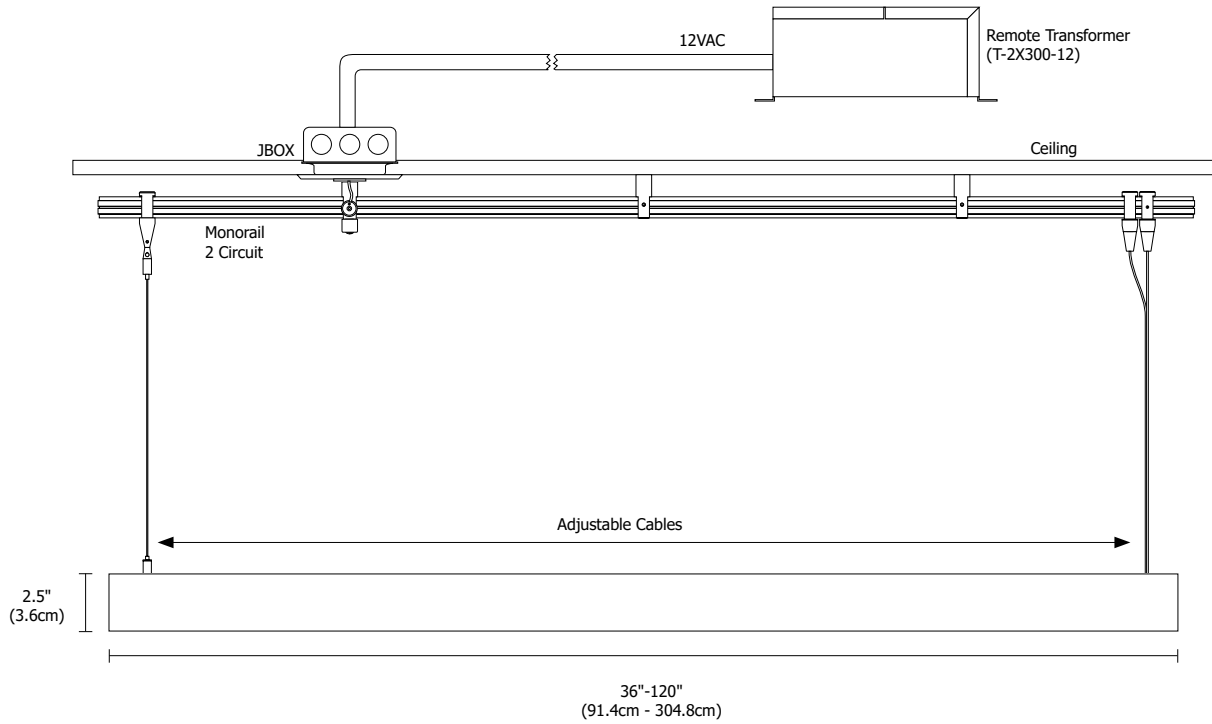

PROJECT:

FIXTURE
TYPE:

DATE:

EDGE
LIGHTING