



REV.06.15.17



Top View

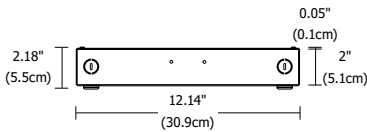

Side View

Description:

Accepts input voltage in a range of 120 - 277VAC and outputs 24VDC power up to 100 watts. The integrated DALI Driver receives signals from a DALI-compatible controller (sold separately, by others). This controls color mixing and light intensity for RGB, RGB+W. For White, this controls light intensity for up to four separate systems. Power Supply features short circuit and overload protection. Indoor applications only.

Applications:

Indoor*
 *To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

Power Input:

120-277VAC, 50/60Hz

Power Output:

Class 2; 24 volts DC 2x4.16A at 100 watts maximum

Dimensions:

12.14" x 6.48" x 2.18"

Compatible Controllers:

DALI-compatible controller (Sold separately, by others)

Product	Wattage	Voltage	Mode
PSB	100W	24VDC	DALI
<small>PSB Power Supply with Enclosure Box</small>	<small>100W 100 Watt</small>	<small>24VDC 24 Volt DC</small>	<small>DALI DALI</small>

PROJECT:

FIXTURE TYPE:

DATE:

