



REV.01.20.17



Top View

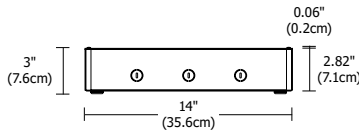

Side View

Description:

Accepts input voltage in a range of 120 - 277VAC and outputs 24VDC power up to 3x96 watts. Can be used as a dimmable or non-dim Power Supply. The low voltage output dims down to 7% when two additional wires are connected to a 0-10V dimmer. Power Supply features short circuit and overload protection. Indoor applications only.

Applications: Indoor*

*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

Power Input:

120-277 volts AC, 50/60Hz

Power Output:

Class 2; 24 volts DC 2x4A, 3x96 watts maximum

Dimensions:

14" x 10" x 3"

Dimmer Type:

Dimmable with Philips Sunrise SR1200ZTUNV, 0-10V dimmer. See fixture spec sheet or dimming chart for additional details.

Product	Wattage	Dimming	Voltage
PSB	3X96W	010	24VDC
<small>PSB Power Supply with Enclosure Box</small>	<small>3X96W 3x96 Watts</small>	<small>010 0-10 Volt Dimming</small>	<small>24VDC 24 Volt DC</small>

PROJECT:

FIXTURE TYPE:

DATE:



REV01.20.17




Intertek



Class 2

Application: 0-10V dimming for LED Soft Strip

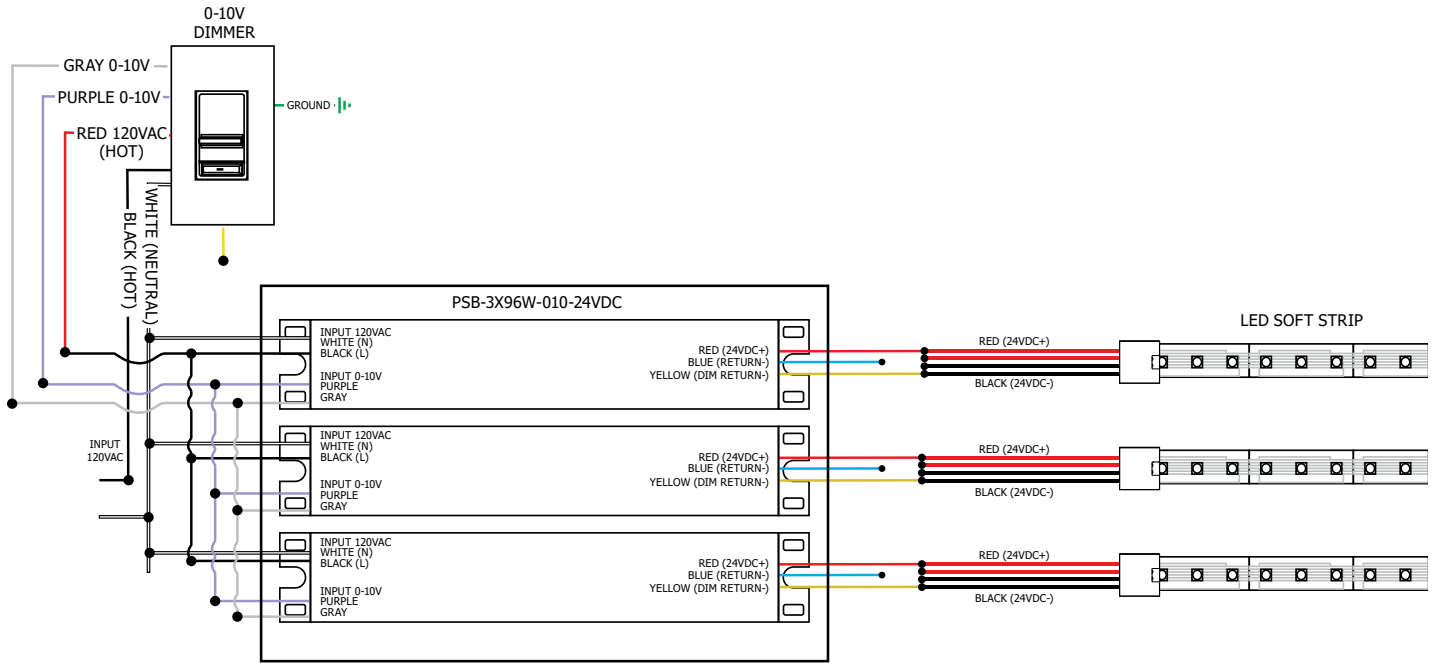

PROJECT:

FIXTURE TYPE:

DATE:

