


# T24M LINEA TRACK LUMINAIRE

## 24VDC, 2-CIRCUIT MAGNETIC TRACK LUMINAIRE, STATIC WHITE & WARM DIM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 09.05.25

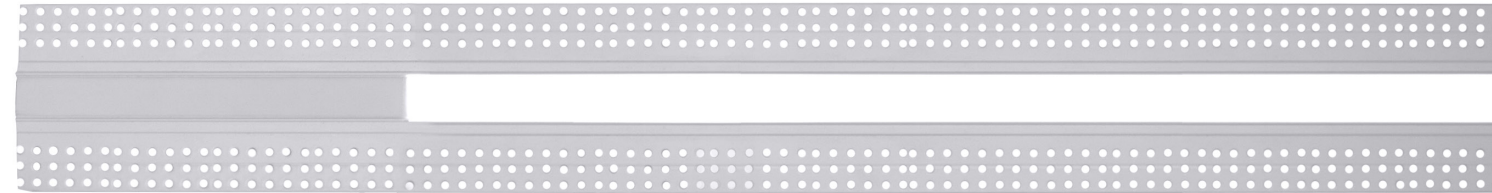

Linea Fixture with Plaster-in Detail

### DESCRIPTION

Linea by PureEdge Lighting is a low-profile linear luminaire engineered for our TruTrack® 2-Circuit Magnetic Plaster-In systems, delivering clean lines and precise illumination. Integrated into a fully Low Voltage 24VDC system, it delivers exceptional efficiency over traditional track lighting. Available in 2W and 5W per foot, and in multiple color temperatures including Warm Dim (30D), Linea is suited for a wide range of residential, retail, hospitality, and commercial applications. For custom quotes and layout assistance, send your drawings and ideas to our design team: [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).

### MOUNTING OPTIONS

Compatible with TruTrack® Magnetic (**TR24M-2C**), Surface Mount Magnetic track (**TS24M-2C**) and TruTrack® Trim (**TTR24M-2C**).

### REMOTE POWER SUPPLIES\* (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [Uni Trim Power Supply](#) Universal Dimming (**TRIAC, ELV, 0-10V**)

### MAKE IT SMART

- [Pure Smart™ Wiz Pro Controls](#)

\*In-Wall Mounting Kits available for select power supplies

### LAMPING

BEAM ANGLE REFERENCE 45°									
WATTS PER FOOT	2W				5W				
COLOR TEMPERATURE	24K	27K	30K	35K	24K	27K	30K	30D*	35K
LUMENS PER FOOT (lm/ft)	100	101	105	120	184	186	194	221	222
LUMENS PER WATT (lm/w)	40	40	42	48	42	42	44	46	51
CRI	92+	92+	92+	92+	92+	92+	92+	94+	92+

\*30D - Warm Dim (4.8 Watts)


### APPLICATIONS

Designed for indoor use only, dry and damp locations. Ideal applications in Commercial, Retail, Residential, Hospitality, Education, and Healthcare Institutions.

### WARRANTY / LABELS

Pro-rated 5 year warranty. Assembled in America, ETL (Conforms to UL1598 and CSA 22.2 #250.0) RoHs.

### FINISHES




System	Type	Fixture	Wattage	Length In Feet	Color Temperature	Finish
<b>T24M</b>	<b>2C</b>	<b>LTL</b>	<b>5W</b>	<b>4FT</b>	<b>30D</b>	<b>BK</b>
<b>T24M</b> Track Head 24V Magnetic Connector	<b>2C</b> 2 Circuit	<b>LTL</b> Linea Track Luminaire	<b>2W</b> 2.5 Watts <b>5W</b> 5 Watts *Warm Dim 4.8W	<b>1-8'</b> Order in 1' increments	<b>24K</b> 2400K Very Warm White <b>27K</b> 2700K Incandescent White <b>30K</b> 3000K Warm White <b>30D</b> 3000D Warm Dim (5W Only) <b>35K</b> 3500K Neutral White	<b>BK</b> Black Powder Coat <b>WH</b> Warm White Powder Coat RAL 9010 <b>PW</b> Pure White Powder Coat RAL 9016 **PW is not finish compatible with Surface Mount Magnetic track (TS24M-2C) or TruTrack® Trim (TTR24M-2C).

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


# T24M LINEA TRACK LUMINAIRE

24VDC, 2-CIRCUIT MAGNETIC TRACK LUMINAIRE, STATIC WHITE & WARM DIM


Recessed Linea Fixture

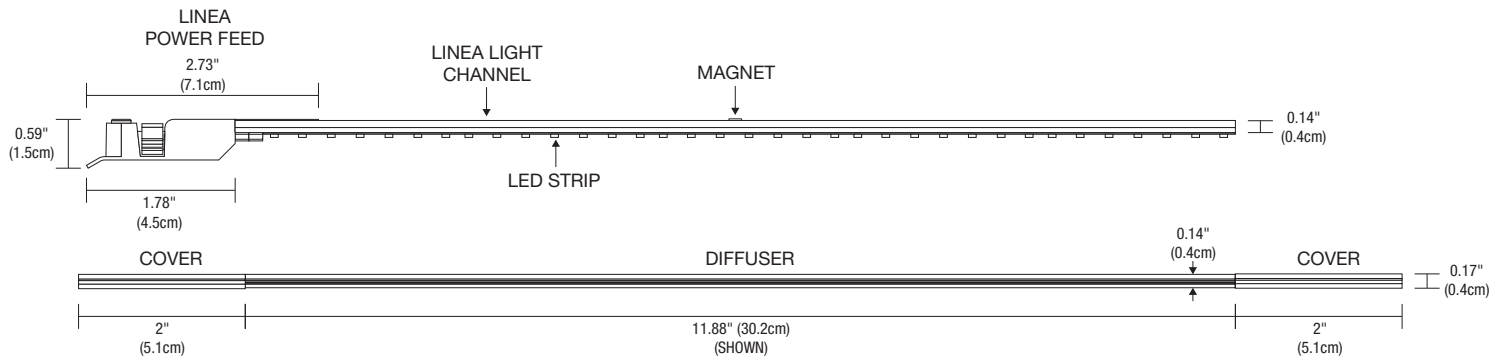

## SURFACE TRACK MAGNETIC 2-CIRCUIT




## TRUTRACK MAGNETIC 2-CIRCUIT

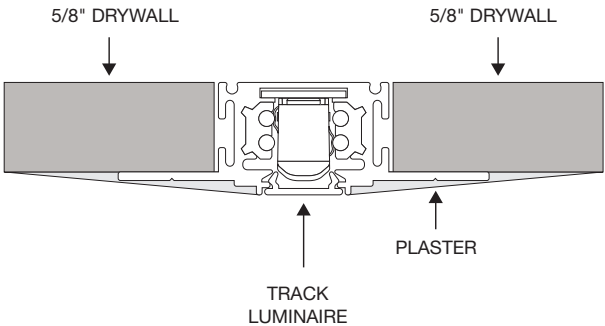

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# UNIVERSAL POWER SUPPLIES WITH TRIM

24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS

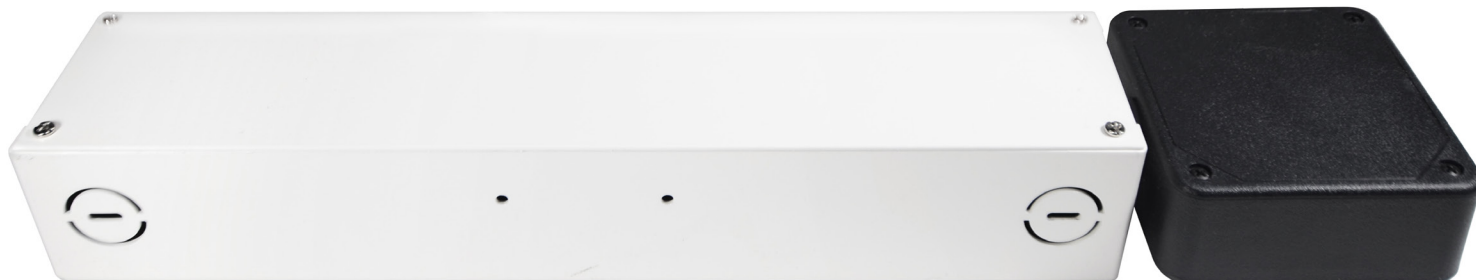

## DESCRIPTION

The Uni TRIM Power Supply is designed for 24 Volt Track Heads, accepts input voltage in a range of 120 - 277VAC and outputs 24VDC power up to 96 watts. Can be used as a dimmable or non-dim Power Supply. Dims down 7% with an ELV dimmer or a 0-10 volt dimmer when two additional wires are connected to the dimmer. The enclosure provides a space inside for electrical connections. Power Supply features short circuit and overload and over temperature protection. Indoor applications only. For custom quotes and layout assistance, send your drawings and ideas to our design team: [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).

## MOUNTING

Surface mounted with conduit access

## COMPATIBILITY

Compatible with PureEdge 24VDC Track heads (T24, T24M), Vanishing Point and Mono-point/Multi-point heads (FJ24, VR, V2MR, MR2R, M44R, 2RRE, 3R8R).

## POWER INPUT

120-277 volts AC, 50/60Hz

## POWER OUTPUT

Class 2; 24 volts DC 4A, 96 watts maximum

## EFFICIENCY

85%

## AMBIENT OPERATING TEMPERATURE

-25C to 40C

## ELV DIMMER TYPE

Legrand: Adorne ADTP703TU  
Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio RA 2

## MAKE IT SMART

ELV & TRIAC [Smart Dimmer & Switch](#)

## 0-10 DIMMER TYPE

Lutron: Radio RA2 (with GRX-TVI), Grafik Eye Qs (with GRX-TVI), Diva (with PP20); Nova T  
Philips: Sunrise SR1200ZTUNV  
Leviton: IP710-DL

## DIMMING CURVE

Linear, Logarithmic 100% - 7% (HydraDrive)

## APPLICATIONS: Indoor\*

\*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.




Product	Wattage	Dimming	Voltage	Type	Options
<b>PSB</b>	<b>96W</b>	<b>UNI</b>	<b>24VDC</b>	<b>T</b>	<b>STANDARD</b> (Leave Blank)
PSB Power Supply with Enclosure Box	<b>40W</b> 40 Watt <b>60W</b> 60 Watt <b>96W</b> 96 Watt <b>2X40W</b> 2x40 Watt <b>2X60W</b> 2x60 Watt <b>2X96W</b> 2x96 Watt	UNI Universal Power Supply	24VDC 24 Volt DC	T Trim	<b>TB</b> T-Bar <b>CP</b> Chicago Plenum




PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# UNIVERSAL POWER SUPPLIES WITH TRIM

24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS

REV 09.05.25

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS			
ORDERING CODE	PSB-40W-UNI-24VDC-T	PSB-60W-UNI-24VDC-T	PSB-96W-UNI-24VDC-T
			
SPECIFICATIONS			
MAXIMUM LOAD	40W	60W	96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	15.65" X 6.37" X 3.43"	15.65" X 6.37" X 3.43"	15.65" X 6.37" X 3.43"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-40W-UNI-24VDC-T-TB	PSB-60W-UNI-24VDC-T-TB	PSB-96W-UNI-24VDC-T-TB
T-BAR CHICAGO PLENUM	PSB-40W-UNI-24VDC-T-CP	PSB-60W-UNI-24VDC-T-CP	PSB-96W-UNI-24VDC-T-CP

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS			
ORDERING CODE	PSB-2X40W-UNI-24VDC-T	PSB-2X60W-UNI-24VDC-T	PSB-2X96W-UNI-24VDC-T
			
SPECIFICATIONS			
MAXIMUM LOAD	2X40W	2X60W	2X96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	15.4" X 9.73" X 3.43"	15.4" X 9.73" X 3.43"	15.4" X 9.73" X 3.43"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-2X40W-UNI-24VDC-T-TB	PSB-2X60W-UNI-24VDC-T-TB	PSB-2X96W-UNI-24VDC-T-TB
T-BAR CHICAGO PLENUM	PSB-2X40W-UNI-24VDC-T-CP	PSB-2X60W-UNI-24VDC-T-CP	PSB-2X96W-UNI-24VDC-T-CP

ELV DIMMING & CONTROLS			
LUTRON DIVA: DVELV-300P	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•
LUTRON RADIO RA3: RR-PROC3-XX	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	•	•

0-10 DIMMING & CONTROLS			
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•
LUTRON DIVA: DVTW-WH, DVSTV-WH	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•
LUTRON RADIO RA3: RR-PROC3-XX	•	•	•
LEVITON: LEV400S0	•	•	•
LEVITON IP710-LFZ	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•
LEGRAND RADIANT: RH703PTUW	•	•	•

TRIAC DIMMING & CONTROLS			
LUTRON SKYLARK: S2-L-WH	•	•	•
LUTRON DIVA DVLV-600P-WH	•	•	•
LUTRON DIVA DVLV-603P-WH	•	•	•
LUTRON MAESTRO MALV-600-WH	•	•	•
LUTRON MAESTRO MALV-1000-WH	•	•	•
LUTRON MAESTRO MA-R-XX	•	•	•
PURE SMART DIMMER AND SWITCH	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per e and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90

- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:
  - Triac Dimmer: (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
  - ELV Dimmer: (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supplies used for LED lighting
  - 0-10 Dimmer : Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with ELV Low Voltage Drivers.

\*Title 24 with JA8 listed PureEdge products and systems

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


# UNIVERSAL POWER SUPPLIES WITH TRIM

24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS


REV 09.05.25

## POWER SUPPLY DIMENSIONS & DIAGRAMS



### 40W, 60W, 96W

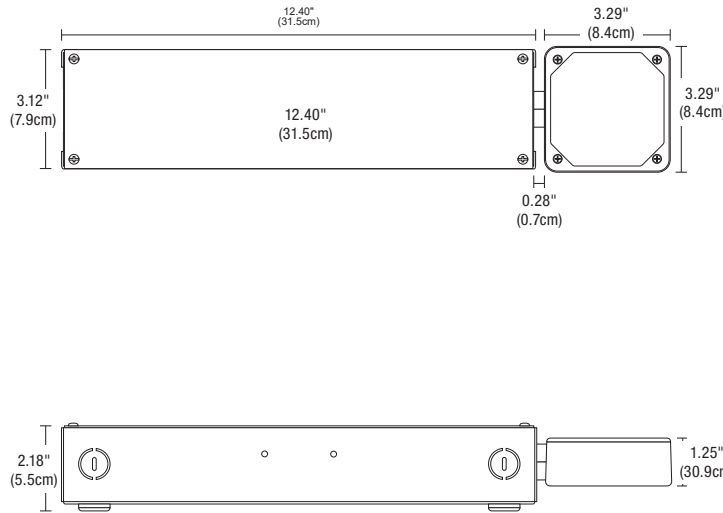

### 2X40W, 2X60W, 2X96W

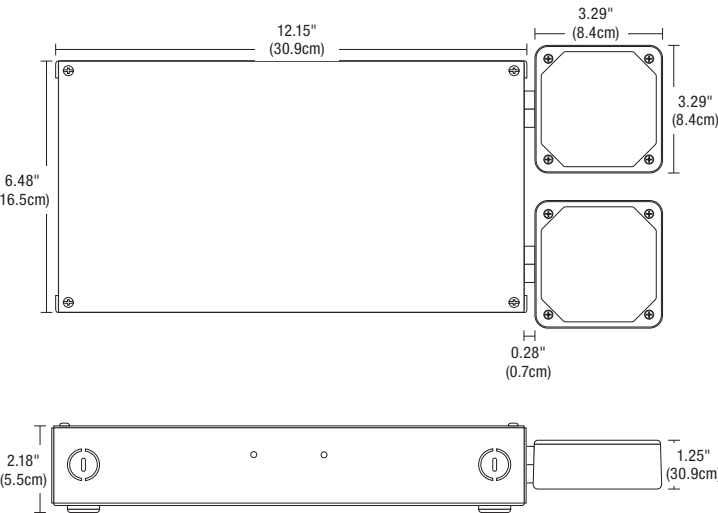

### T-BAR GRID CEILING

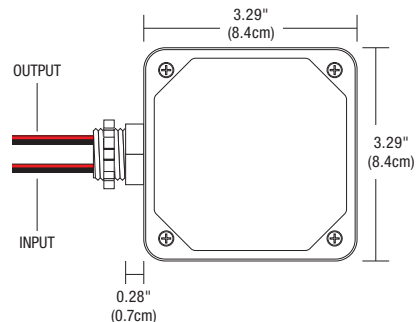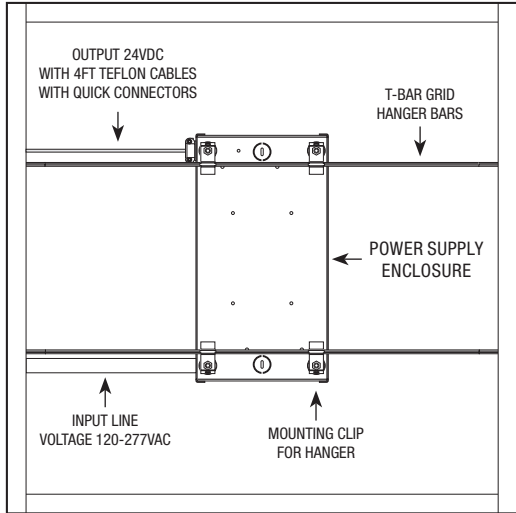

### VOLTAGE TRIM BOX

Voltage Trim Box is included with power supply. Mounts in 1/2" knock-outs. The part number below is to be used for replacement only.

Product	Voltage	Type
<b>PSB</b>	<b>24VDC</b>	<b>TRIM</b>
PSB Power Supply with Enclosure Box	24VDC 24 Volt DC	TRIM Voltage Trim Box


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# UNIVERSAL POWER SUPPLIES WITH TRIM


24VDC, UNIVERSAL DIMMING (ELV, TRIAC, 0-10V) STATIC WHITE & WARM DIM FOR TRACK HEADS

REV 09.05.25


## ELV WIRING DIAGRAM

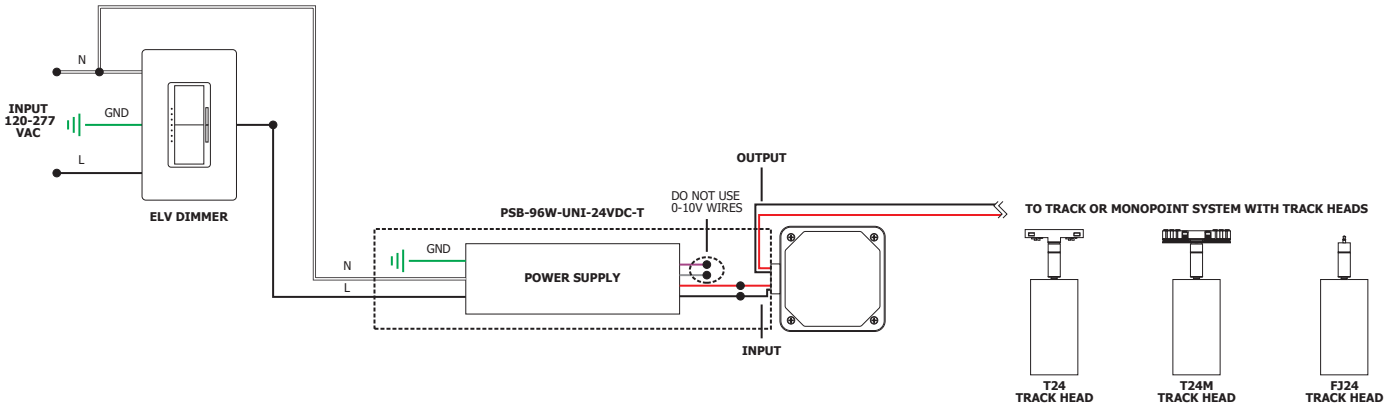

## 0-10V WIRING DIAGRAM

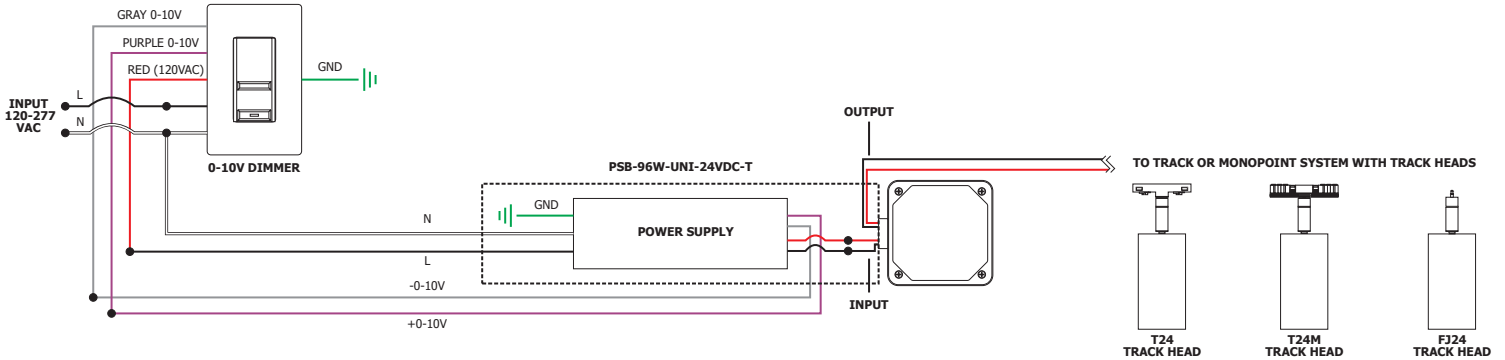

## SMART WIRING DIAGRAM & NETWORK TOPOGRAPHY

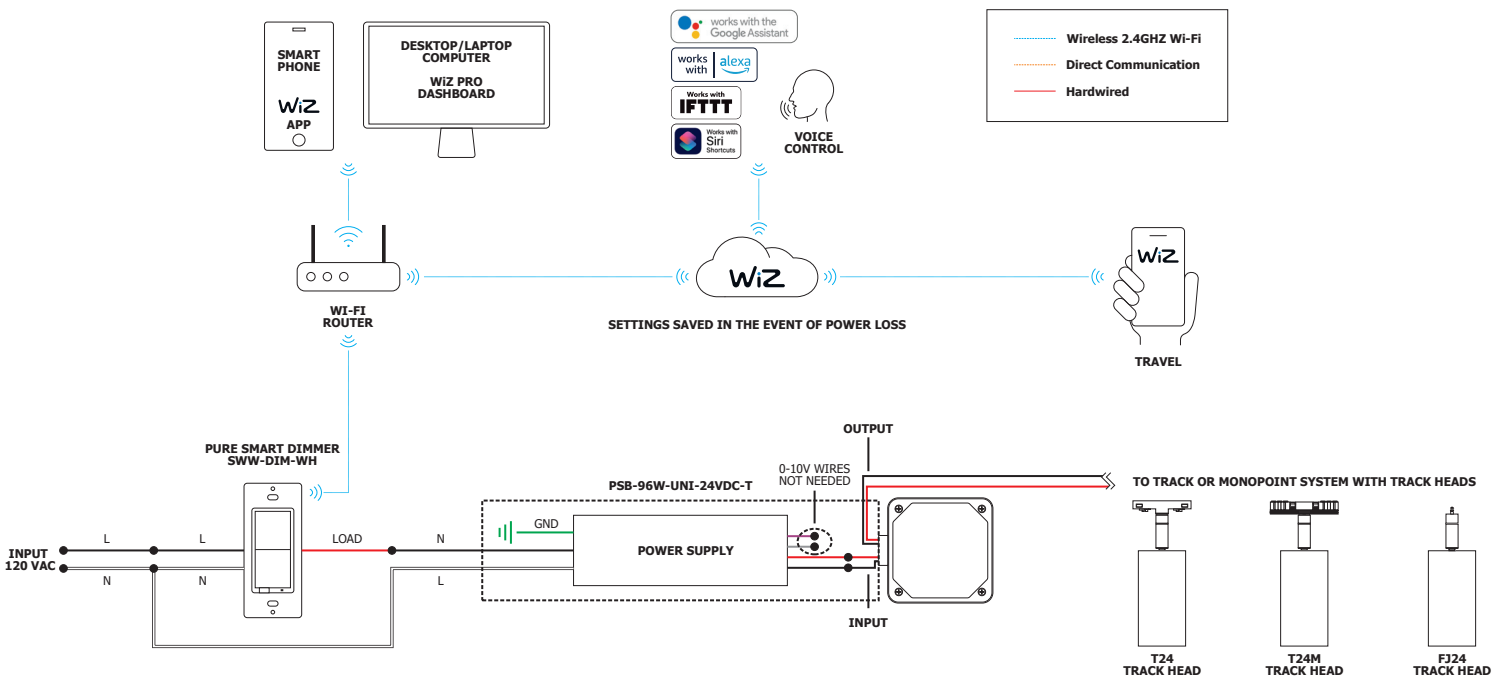

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

# TM30 DATA


24VDC, 2-CIRCUIT MAGNETIC TRACK LUMINAIRE, STATIC WHITE & WARM DIM

REV 09.05.25

**TM-30-15 DATA:** The data below is for Tubo. Consistent color temperatures among multiple track heads is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

**2400K** | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

**2700K** | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

**3000K** | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

**3500K** | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

**3000D** | Rf: 89.8 | Rg: 101.4

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--