


VERGE CORNER WARM DIM

24VDC, 5/8" DRYWALL PLASTER-IN LED SYSTEM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 08.22.25

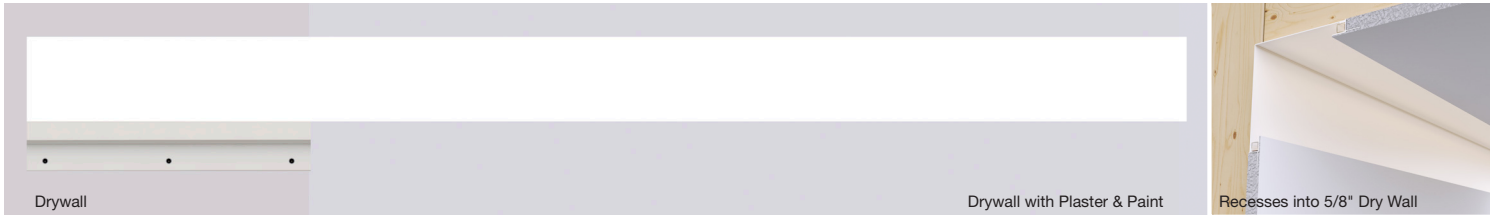

DESCRIPTION

Verge Corner Warm Dim is another innovative design from PureEdge's family of 24VDC plaster-in systems, continuing to redefine the relationship between lighting and architecture. Verge Corner mounts directly to studs and joists without modification because it recesses within 5/8" or thicker drywall. The slim plaster-in aluminum channel has a 4" paintable backer plate creating visually interesting and dramatic illumination by highlighting the inside corners of two drywall surfaces such as ceiling, coves, and skylights. Field-cutable, Verge Corner is ordered in 1' increments up to 40'. Warm Dim technology (**27D** & **30D**) mimics an incandescent atmosphere by decreasing the color temperature as you dim. Our Warm Dim strips can be dimmed all the way down to a soothing amber hue at 1800K, reminiscent of candlelight along the halogen curve [Click here for all Other Color Temperatures](#). Verge brings together a Modern and Dynamic appearance to Residential and Commercial environments, offering unlimited creativity and empowering you to design One-of-a-kind spaces every time. Remote Power supplies are required and sold separately. Coordinate installation with electrical and drywall contractors. Includes a 5-year pro-rated warranty. For custom quotes and layout assistance, send drawings to design@PureEdgeLighting.com. Designed by Gregory Kay.

DESIGN NOTE

Verge Corner is installed on flat surfaces that form inside corners, coves, windows, and skylights. Ambient and harmonious, the plaster-in LED system blends into 5/8" thick drywall to enhance the contemporary aesthetic of interior spaces. Verge offers unsurpassed precision and flexibility that transforms spaces into thoughtful and refined works of art.

MAXIMUM LENGTHS BEFORE RE-FEEDING:

- 10 watts per foot - 20' (2 x 5WDC)

LAMP

- Warm Dim: **27D** and **30D** dim down to 1800K, resembling halogen light sources
- Lumen Performance: 405lm/ft at 3000K 10 watts per foot
- Designer Grade High CRI 95+ LEDs
- Average life: 50,000 hours
- For additional color temperatures refer to other specifications

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V 0-10V\)](#)
- [Lutron](#) Hi-Lume/Ecosystem

*In-wall mounting and drop ceiling kits available for select power supplies

MAKE IT SMART

- [Pure Smart™ WiZ Pro Controls](#)

ORDERING

Verge Corner is installed behind drywall with Adjustable Mounting Bars Requires Remote Power Supply (ordered separately) In-Wall Mounting Kits are available for select power supplies. Order in 1' increments (12") field-cutable to any length.

INCLUDED COMPONENTS

(2) Junction Boxes, Adjustable Mounting Bars, (2) Backer Plates, (2) Verge Corner Channels, Drywall Screws, (2) LED Strips, and (2) Lenses

APPLICATIONS

Indoor damp or dry locations only. Ideal for inside corners of drywall surfaces such as Walls and Ceilings, Coves, Windows and Skylights in Residential, Commercial, Retail and Hospitality environments.

COMPLIANCE

ETL, Class 2, Damp Location, Manufactured in the USA.

For quick & easy reference, plus the most up-to-date pricing, use our Configurator. [Verge Corner](#)

PureEdge is the Original Designer of 5/8" Drywall Products, Backed by Over 30 Years of Precision Manufacturing and Design.

System	Watts Per Foot	Length in Feet	Color Temperature
VGCO	10WDC	1-20FT	ST27D
VGCO Verge Corner	10WDC 2x4.8 Watts	1-20FT	ST27D 2700K Warm Dim ST30D 3000K Warm Dim

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



VERGE CORNER WARM DIM

24VDC, 5/8" DRYWALL PLASTER-IN LED SYSTEM



REV 08.22.25

DELIVERED LUMENS

10W (2x4.8 watts)			
WATTS PER FOOT			
COLOR TEMPERATURE	270		300
LUMENS PER FOOT (lm/ft)	398		405
LUMENS PER WATT (lm/w)	41		42
CRI	94+		94+


LENGTH LOAD CHARTS: To determine the necessary wire gauge use our [Voltage Drop Calculator](#).

10 WATTS PER FOOT (2 X 4.4W)	
LENGTH IN FEET	WATTS
1	10
2	19
3	29
4	38
5	48
6	58
7	67
8	77
9	86
10	96
11	106
12	116
13	124
14	134
15	144
16	154
17	164
18	174
19	182
20	192


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CORNER WARM DIM

24VDC, 5/8" DRYWALL PLASTER-IN LED SYSTEM

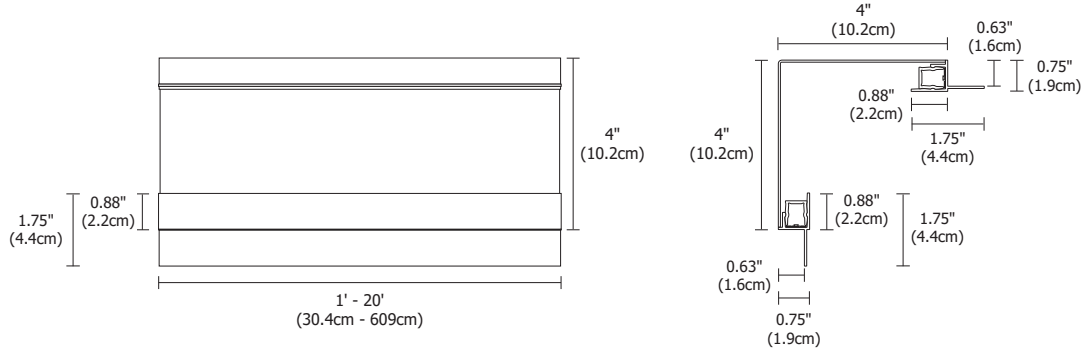

INCLUDED COMPONENTS

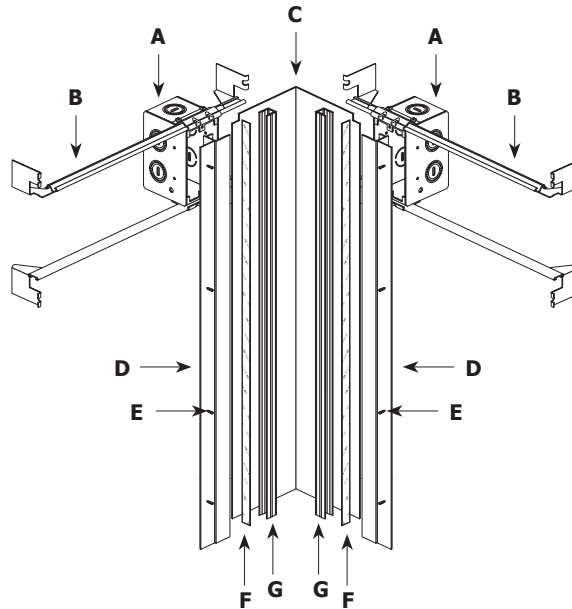

A. JUNCTION BOX

Mounts behind drywall with adjustable mounting bars. Low Voltage 24VDC wires from Remote Power Supply connect to the wires inside box. Junction Box opening is covered by the Backer Plate, and required at the beginning of each run.

B. ADJUSTABLE MOUNTING BARS

Provide flexibility for mounting in a variety of spaces. Verge Corner includes two sets of mounting hardware.

C. BACKER PLATE

4" paintable aluminum plates conceal junction box and reflect light.

D. VERGE CHANNEL

Two 5/8" deep extrusions each house a single row of LED Strip.

E. DRYWALL SCREWS


Secure channels to drywall and studs.

F. LED STRIP

Commercial-grade White or Dynamic Color Changing LED Strip. See lamp data on for additional details.

G. LENS

0.6" wide Diffused White lens projects a clean line of light without pixelation. Verge Corner includes two lenses.

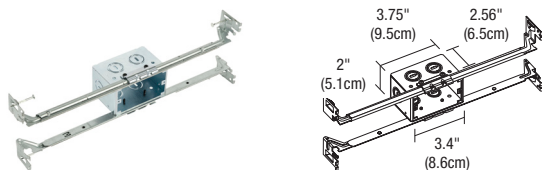

JUNCTION BOX ROUGH-IN COMPONENT


One Junction Box is included with Verge Wall and two Junction Boxes are included with Verge Corner. Order additional Junction Box(es) separately to rough-in electrical wiring before drywall installation. Quick shipment available.

System	Size	Component
VG	1RE	JBOX
VG Verge	1RE 1" Rectangle	JBOX Junction Box


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CORNER WARM DIM 24VDC, 5/8" DRYWALL PLASTER-IN LED SYSTEM

INSTALLATION

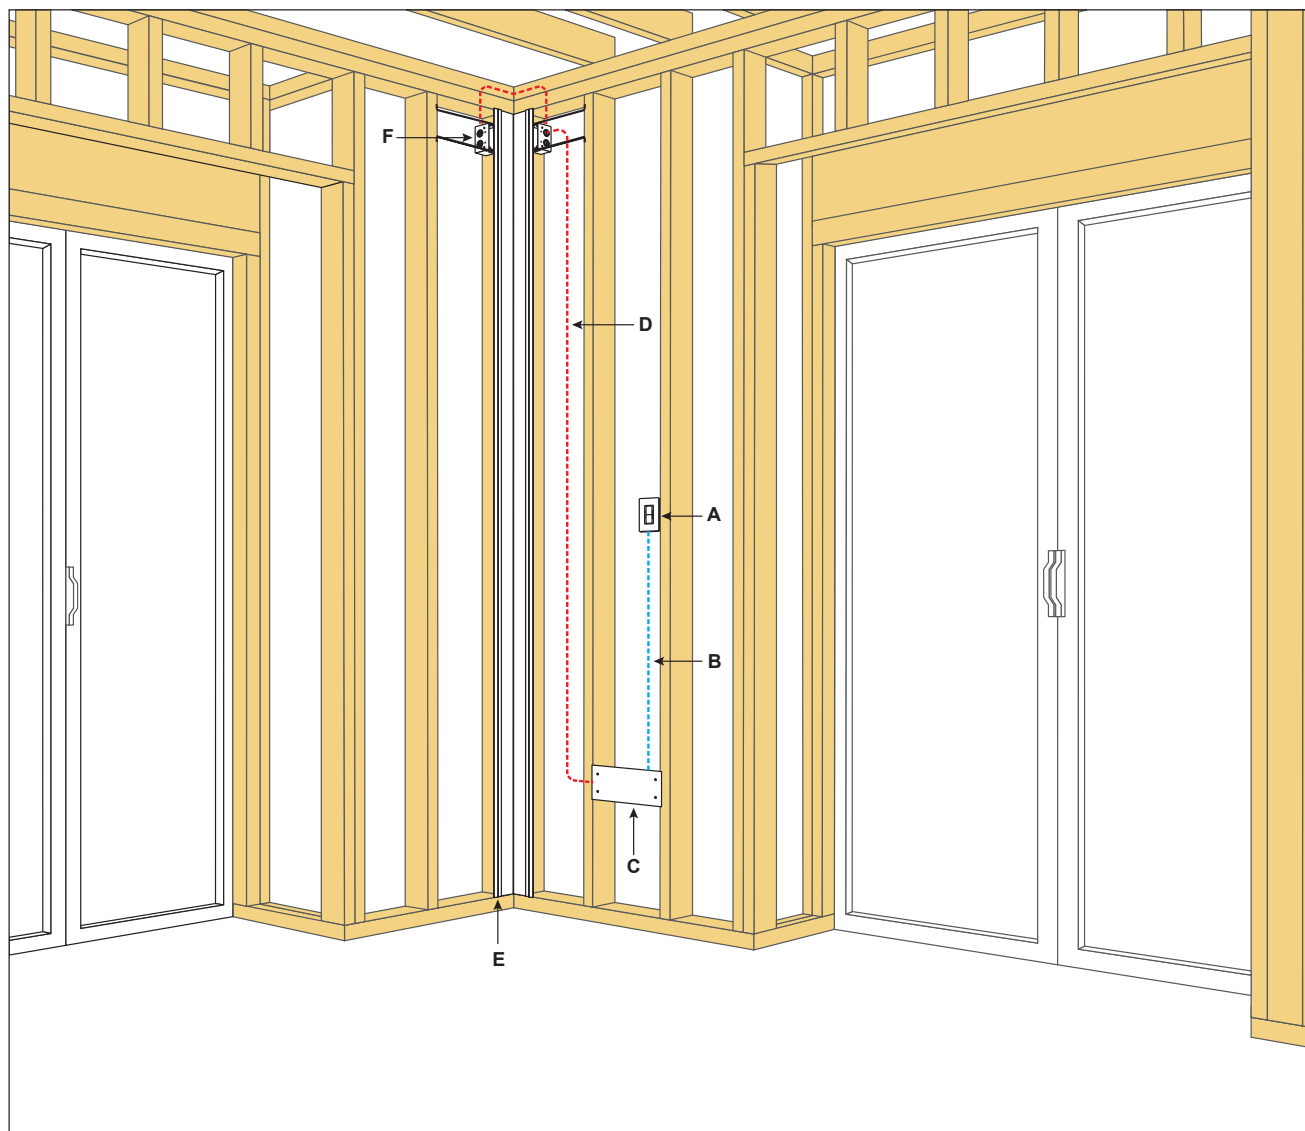

- A. DIMMER OR SWITCH**
- B. 120VAC WIRING**
- C. 120V/24VDC REMOTE POWER SUPPLY FOR IN-WALL MOUNTING KIT**
- D. 24VDC, CLASS 2 WIRING**
- E. VERGE CORNER CHANNEL**
- F. JUNCTION BOX**

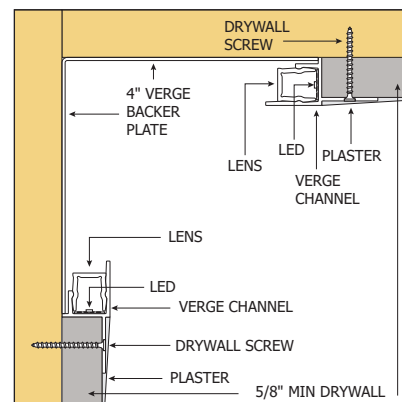

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PURE SMART™ Wi-Fi DIMMER

FOR TRADITIONAL NON-SMART BULBS & FIXTURES CONNECTED BY WIZ PRO



DESCRIPTION

The Pure Smart™ Wi-Fi dimmer works with non-smart bulbs and fixtures compatible with forward phase or Triac dimming(not compatible with 0-10V Dimming). Smart Wi-Fi Dimmer also allows for scheduling, grouping, voice control and control from anywhere via the WiZ app on your mobile device or the WiZ Pro Dashboard on your desktop.

OPERATION*

Features an ON/OFF switch and dimming functionality activated with a long press of the On (Brightness Up) or Off (Brightness Down) button. 400W Maximum Incandescent load, 150W CFL and/or retrofit LED bulb. Minimum trim and fade in/out settings are adjusted in the WiZ App. Communicates over 2.4 GHz Wi-Fi only. If remote power is being used, this dimmer is only compatible with PureEdge Universal Power Supplies. No Hub Required.

*When dimming traditional CFL/LEDs, ensure they are marked as dimmable.

BODY

Durable polycarbonate body. Compatible with decorator style wall plate (Not Included)

EASY INSTALLATION

The Pure Smart™ Wi-Fi Dimmer installs just like a regular in-wall switch. Works with any non-smart Static CCT or Warm Dim bulb/ fixture compatible with forward phase or Triac dimming. Can be used in 3-way applications with [Pure Smart Room Controllers](#) as companions only (Reference Manual for Wiring Diagram). Compatible with standard gangable boxes. Requires neutral wire. No Hub Required.

WIZ APP

The Pure Smart™ Dimmer can be controlled via the WiZ app (works with iOS and Android) from anywhere. Voice control enabled when used in conjunction with Google Assistant, Siri, Alexa, IFTTT, and SmartThings. Grouping, zoning, and scheduling can all be programmed with the WiZ app or WiZ Pro Dashboard.


SECURITY

3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

SPECIFICATIONS

Approved Location	Dry / Indoor
Input Voltage	120Vac - 60 Hz
Certification	cULus, FCC
Compatible Load(s)	Any non-smart bulb or fixture *Triac, ELV (Reverse Phase/ Trailing Edge dimming) and MLV (Forward Phase/Leading Edge Dimming) only
Maximum Power	Incandescent: 400W Compact Fluorescent (CFL): 150W LED: 150W
Dimming	Dims to 1% with app trim setting at 30%
Operating Temperature	23°F~113°F (-5°C~45°C)
Wireless Frequency	2.4GHz
Radio Frequency	Certified IEEE 802.11, Wi-Fi 2.4Ghz radio
Wireless Standard	IEEE 802.11
Warranty	3-Year

Product	Type	Finish
SWW	DIM	WH
SWW Pure Smart Wall WIZ Pro Connected	DIM Dimmer	WH White

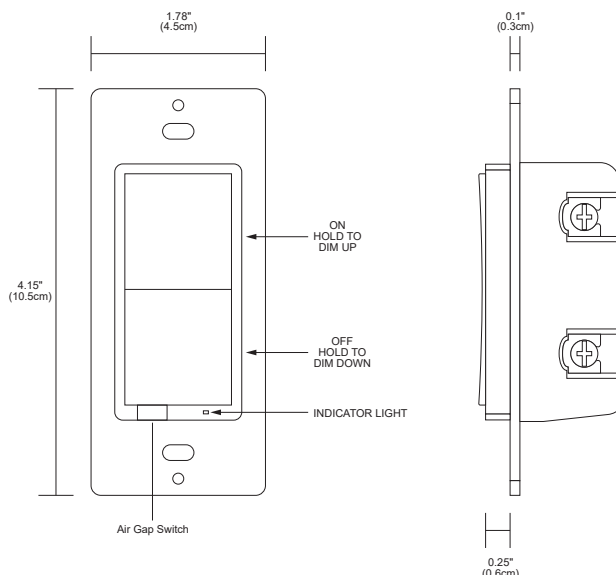

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


CEILING TM30 DATA

24VDC, 5/8" DRYWALL PLASTER-IN LED SYSTEM

TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92	-2.4%	1.5%
2	94.7	-2.1%	-0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic

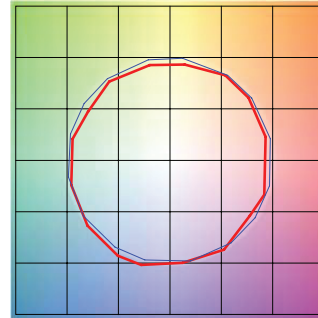


■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic

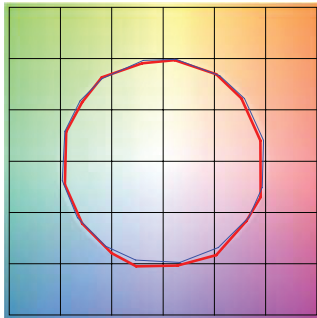


■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic

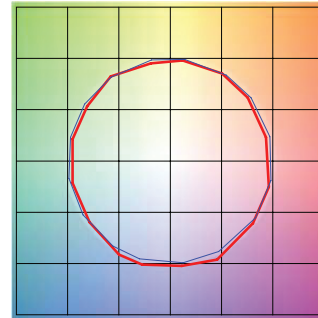


■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%