

VERGE CEILING/DOOR DO-IT-YOURSELF 24VDC PLASTER-IN 5/8" DRYWALL PLASTER-IN LED SYSTEM

BY GREGORY KAY, ORIGINAL DESIGNER OF 5/8" DRYWALL PRODUCTS | MADE IN AMERICA

REV 01.30.25



DESCRIPTION

Verge Ceiling/Door DIY (**Do-It-Yourself**) is another innovative design addition to the family of 5/8" Drywall Plaster-in systems pioneered by PureEdge. The 24VDC system contains a slim plaster-in aluminum extrusion and a 4" paintable aluminum backer plate that mounts directly to studs or ceiling joists without any modification and recesses within 5/8" or thicker drywall. Continuing to redefine the relationship between lighting and interior design, the Verge Ceiling/Door elegantly highlights ceiling perimeters while emitting smooth and continuous illumination. Field-cutable lengths, using our designer-grade High **CRI** Color Rendering LEDs which are available in many color temperatures: Static White 2200K-5700K, Warm Dim (**27D or 30D**) and, Tunable White (**2K6K and 27K6**) as well as three wattage options of 2WDC, 5WDC and 7WDC. Verge brings a modern appearance to residential and commercial environments, offering unlimited creativity, and empowering you to design one-of-a-kind, personalized spaces every time. Remote Power supplies are required and sold separately. Coordinate installation with electrical and drywall contractors. Includes a 5-year pro-rated warranty. For custom quotes and layout assistance, send drawings to design@PureEdgeLighting.com. Designed by Gregory Kay.

ORDERING

Verge DIY Mounts behind drywall. Requires Remote Power Supply (ordered separately). In-Wall Mounting Kits are available for select power supplies. Field-cutable to any length.

MAXIMUM LENGTHS BEFORE RE-FEEDING:

- 2WDC - 40'
- 5WDC - 20'
- 7WDC - 12'

DESIGN NOTE

Verge Ceiling/Door DIY can be installed on a single surface such as the perimeter of the ceiling/door accentuate or highlight coves and other architectural elements. Ambient and harmonious, the plaster-in LED system blends into 5/8" thick drywall to enhance the contemporary aesthetic of interior spaces. Verge offers unsurpassed precision and flexibility that transforms spaces into thoughtful and refined works of art.

LAMP

- Static White Color Temperatures ranging from **2400K** through **4000K**
- Warm Dim: **27D** and **30D** dim down to 1800K, resembling halogen light sources
- Pro-Dim: **27KPD** (dims down to 1800K) and **30KPD** (dims down to 2000K), dims to off with Pro-Dim power supplies
- Tunable White: **2K6K** and **27K6** grants independent control for adjusting color temperature and intensity
- Dynamic RGB & RGB+White in 2000K (**RGB, RGB20K**) (special order in 27K, 30K and 40K)
- TruColor™ **RGBTW** Dynamic RGB with Best-in-Class Tunable White 1500K-6500K
- Average life: 50,000 hours

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

*See LED Strips for correlating power supplies (pages 6-14).

APPLICATIONS

Indoor damp or dry locations only. Ideal for ceiling/door perimeters and outlining architectural elements in residential, commercial, retail, educational and hospitality environments.

COMPLIANCE



ETL, Class 2, Damp Location, Made in USA.

1-hour fire rating uses Two pieces of Type X Gypsum board, for 2-Hour fire rating use Three pieces of Type X Gypsum board.

PureEdge is the Original Designer of 5/8" Drywall Products, Backed by Over 30 Years of Precision Manufacturing and Design.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


VERGE CEILING/DOOR DO-IT-YOURSELF 24VDC PLASTER-IN 5/8" DRYWALL PLASTER-IN LED SYSTEM

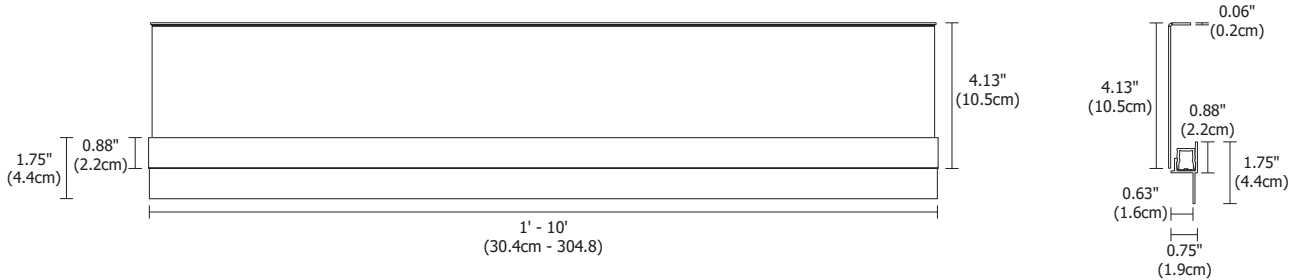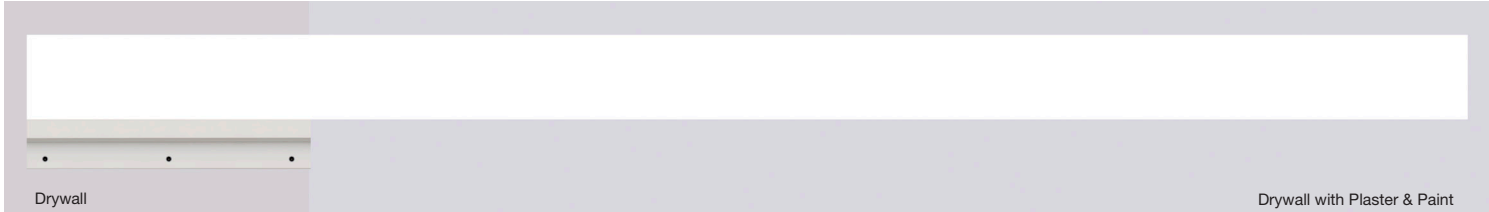

CHANNEL, BACKER PLATE AND LENS

Plaster-In Channel, Backer Plate and Lens. LED Strip (not included) installed on side of the channel. Field cuttable to any length.


System	Component	Size
VGCE	CHLN	4FT
VGCE Verge Ceiling	CHLN Channel and Lens	4FT 5FT 8FT 10FT

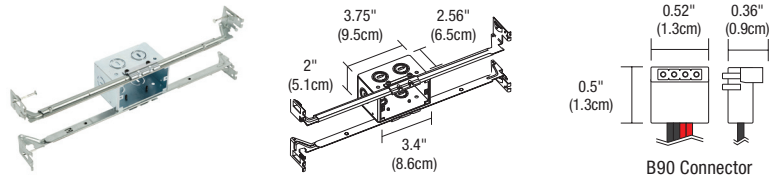

JUNCTION BOX ROUGH-IN COMPONENT

Junction box for rough-in electrical wiring before drywall installation. Includes B90 connector 8 Inches long. Quick shipment available. Required Component.

System	Size	Component	
VG	1RE	JBOX	DW
VG Verge Wall	1RE 1' Rectangle	JBOX Junction Box	DW Static White/Warm Dim TW Tunable White TC TruColor RGBTW

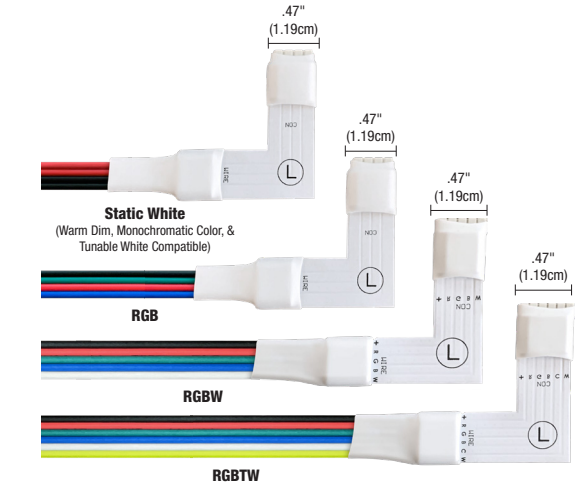

POWER FEED/FLEXIBLE CONNECTOR


Included with Center Feed Power components. Part numbers listed below to be used for replacements only. For use with Static White, Warm Dim, Tunable White, RGB, RGBTW, and Monochromatic color temperatures. Flexible Connectors link two sections of LED Strip end to end. To use as a Power Feed cut off the male end, and connect to the Power Supply.

Product	Type	Component	Orientation	Size	Color Temperature Options
SS	FE	CON	LBL	6IN	RGBTW
SS Stomp Strip/ Soft Strip	FE Female Pins	CON Connector	LBL Flexible 90° Left LBR Flexible 90° Right	6IN 6 inches	DW Static White, Warm Dim or Tunable White RGB Red, Green, & Blue RGBW Red, Green, Blue & White RGBTW TruColor™ RGBTW (RGB + Tunable White 1500K-6500K)

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING/DOOR DO-IT-YOURSELF 24VDC PLASTER-IN 5/8" DRYWALL PLASTER-IN LED SYSTEM

INSTALLATION

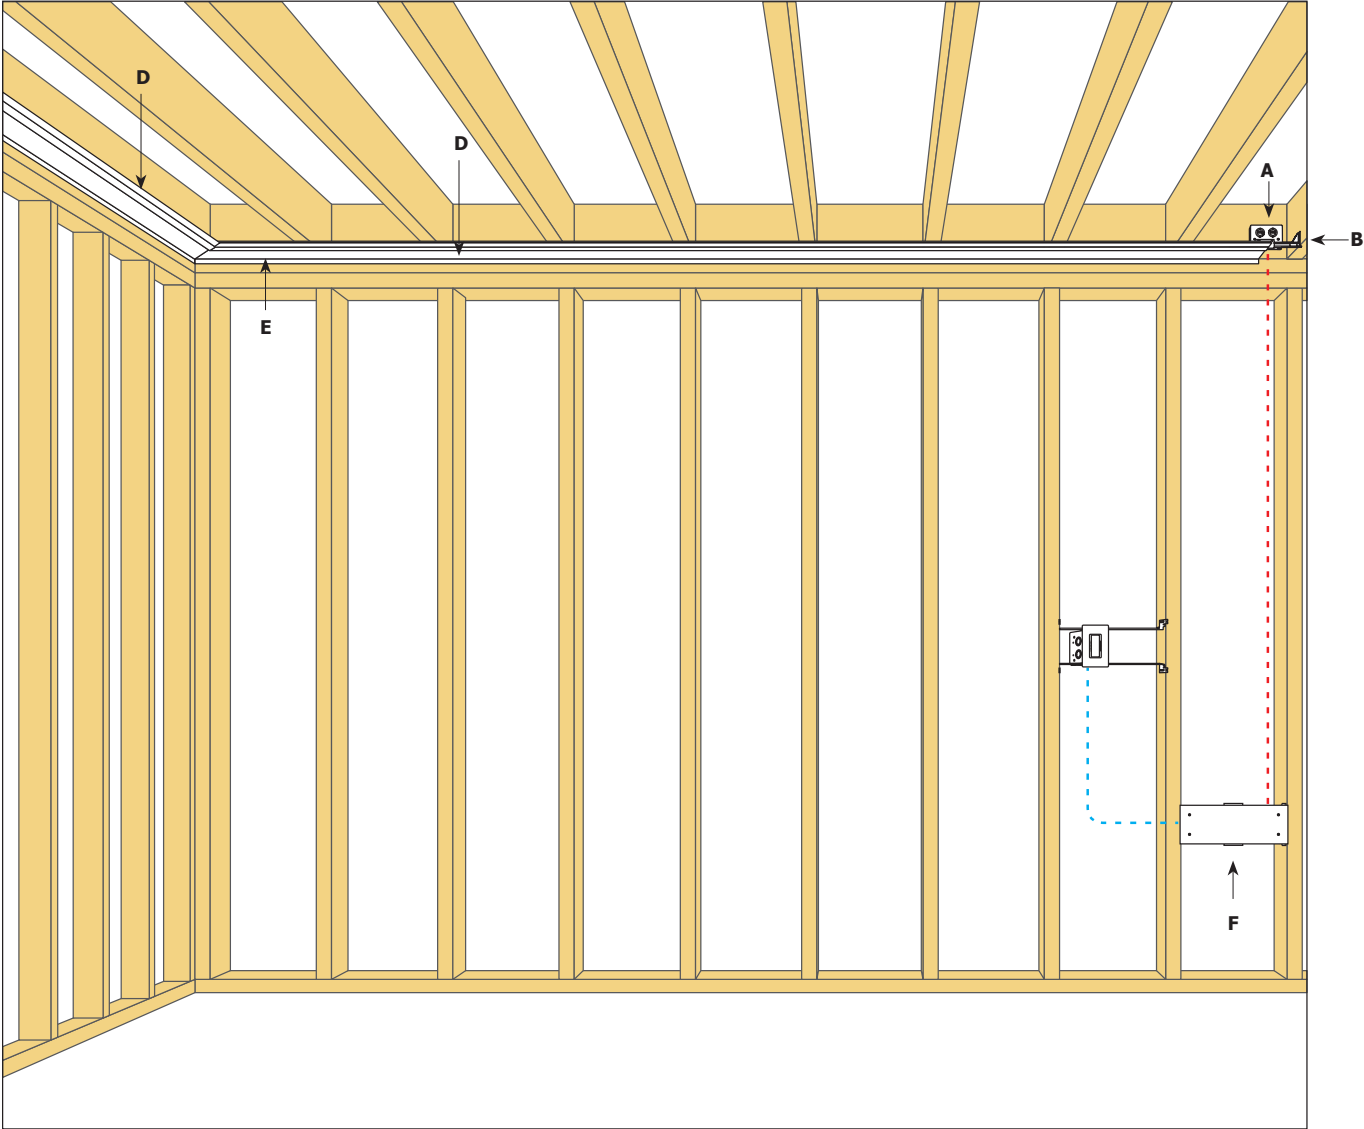

A. JUNCTION BOX

Mounts behind drywall with Adjustable Mounting Bars. Low Voltage 24VDC wires from Remote Power Supply connect to LED wires inside box. Junction Box opening is covered by the Backer Plate and required at the beginning of each run.

B. BACKER PLATE

4" paintable aluminum plate that conceals Junction Box and reflects light.

C. DRYWALL SCREWS

Secures channel to drywall and stud.

D. VERGE CHANNEL AND LENS


5/8" deep extrusion houses a single row of LED Strip.


E. LED STRIP

Commercial-grade White or Color Changing LED Strip.

F. IN WALL MOUNTING KIT

Available for select power supplies, ordered separately.

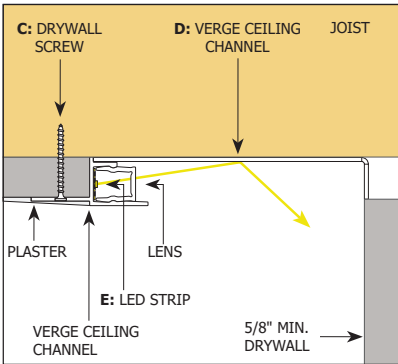

 Direction of Light


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING/DOOR DO-IT-YOURSELF

24VDC PLASTER-IN 5/8" DRYWALL PLASTER-IN LED SYSTEM

REV 01.30.25

INSTALLATION

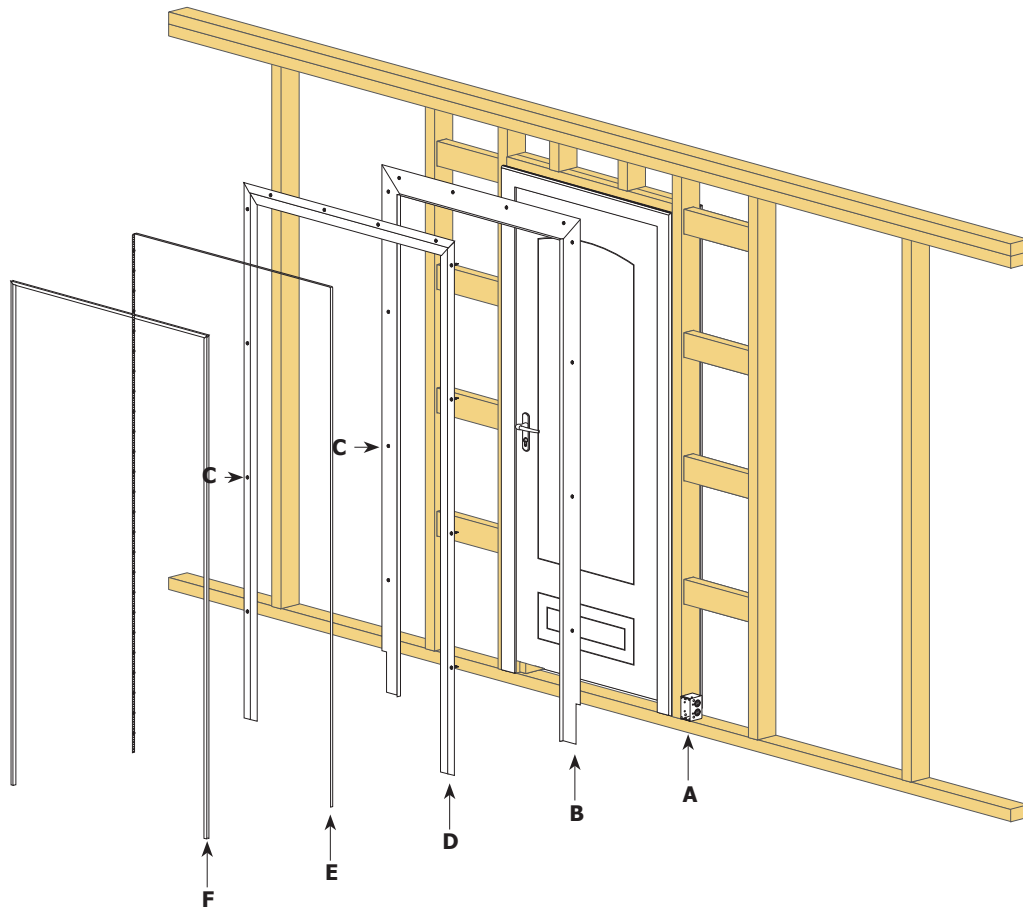

A. JUNCTION BOX

Mounts behind drywall with Adjustable Mounting Bars. Low Voltage 24VDC wires from Remote Power Supply connect to LED wires inside box. Junction Box opening is covered by the Backer Plate and required at the beginning of each run.

B. BACKER PLATE

4" paintable aluminum plate that conceals Junction Box and reflects light.

C. DRYWALL SCREWS

Secures channel to drywall and stud.

D. VERGE DOOR FRAME CHANNEL

5/8" deep extrusion houses a single row of LED Strip.

E. LED STRIP

Commercial-grade White or Color Changing LED Strip.


F. LENS

0.6" wide diffuser lens projects a clean line of light without LED dots.


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING/DOOR DO-IT-YOURSELF 24VDC PLASTER-IN 5/8" DRYWALL PLASTER-IN LED SYSTEM

INSTALLATION

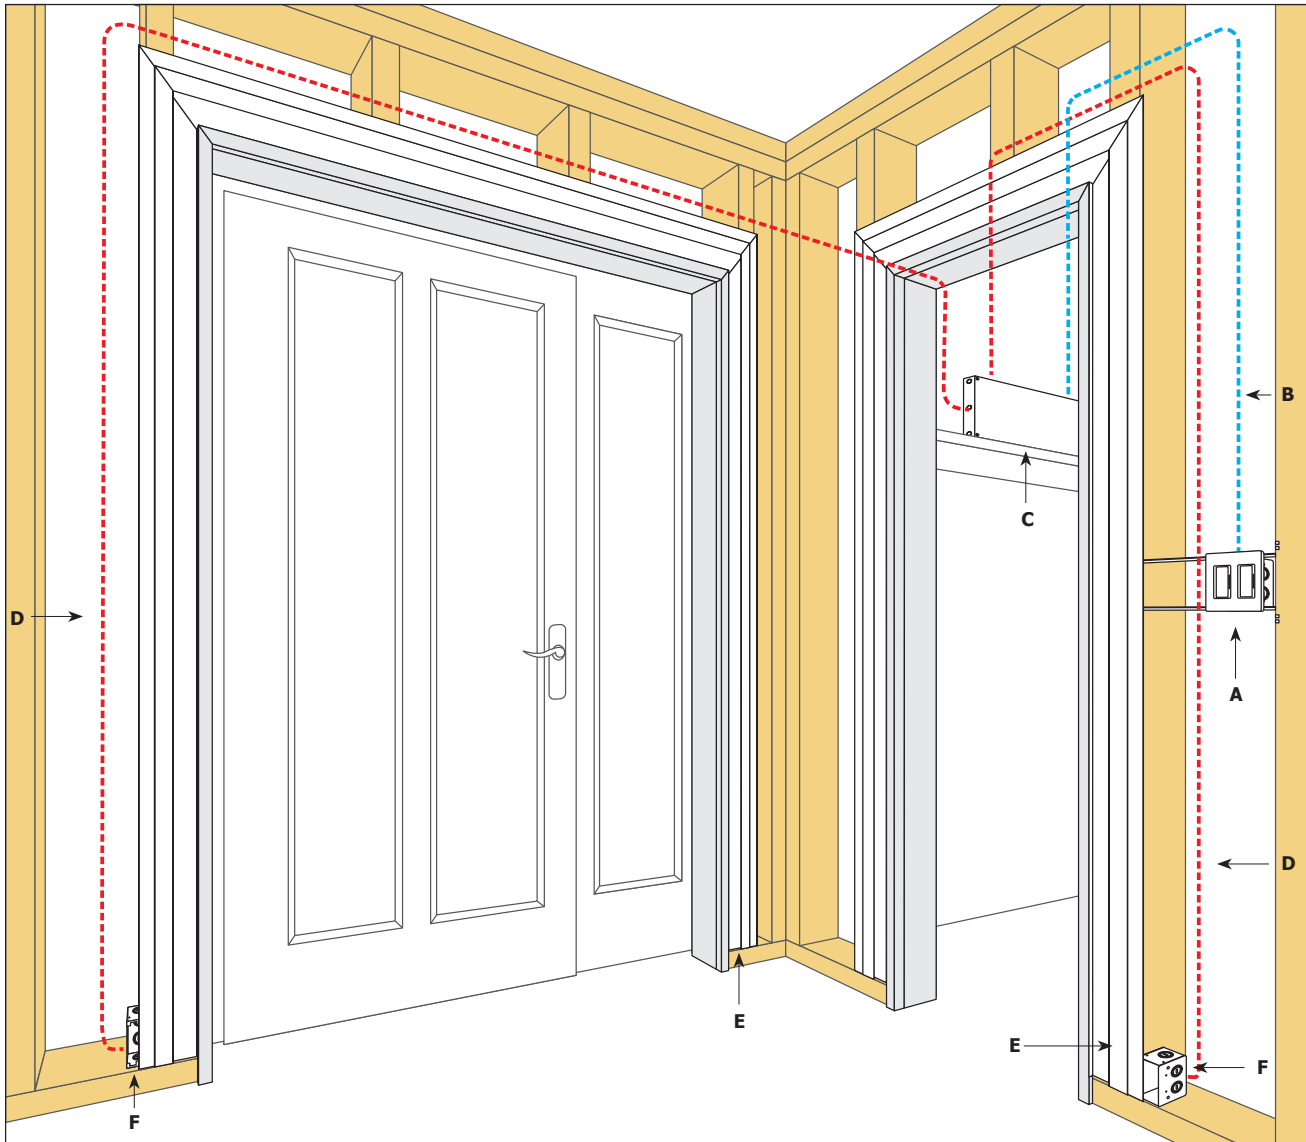

- A. DIMMER OR SWITCH**
- B. 120VAC WIRING**
- C. 120V/24VDC REMOTE POWER SUPPLY FOR IN-WALL MOUNTING KIT**
- D. 24VDC, CLASS 2 WIRING**
- E. VERGE DOOR FRAME CHANNEL**
- F. JUNCTION BOX**

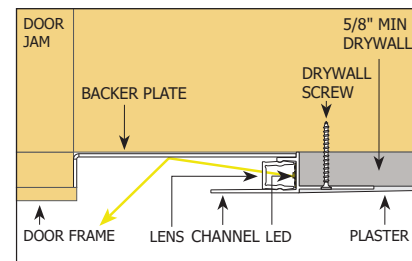

 Direction of Light



PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

STOMP STRIP, STATIC WHITE

24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 12.02.24

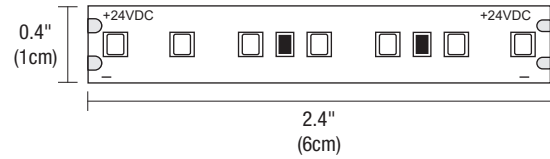

Our Low Voltage LED strips are highly durable, designed to withstand the harsh elements of a job site, and precision engineered to provide superior color rendering up to 92+ CRI. Both Stomp Strip and Soft Strip are used for our **DIY** (Do-it-Yourself) fixtures and systems.

FEATURES & BENEFITS

- Offered with pin connectors reducing time and labor during installation
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering and efficacy
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Suitable for indoor damp locations
- Warranty: Includes a 5-year pro-rated warranty

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 2WDC, 2.5 watts per foot - 40'
- 5WDC, 4.4 watts per foot - 20'
- 7WDC, 7.3 watts per foot - 12'

LAMP

- Offered in multiple Static White Color Temperatures: 2400K, 2700K, 3000K, 3500K & 4000K
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC
- 2.5, 4.4, or 7.3 watts per foot
- Sold in 1' increments
- Field-cutable in 2.4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring


- [Home Integration Solutions](#)
- Pure Smart™ WiZ Pro [Power Supplies](#) & [Controls](#)
- [UNI Driver: Universal Dimming \(ELV, TRIAC, 0-10V\)](#)
- [ELV & TRIAC Smart Dimmer & Switch](#)
- [DALI/DALI-2](#)
- [Lutron Hi-Lume/Ecosystem](#)

*In-Wall Mounting and drop ceiling Kits available for select power supplies

APPROVALS

Class 2 Wiring up to 100 watts, Indoor Damp Location Suitable, RoHS, ETL listed.

NOMINAL LAMP DATA	ST2A					ST5A					ST7A				
WATTS PER FOOT	2.5W					4.4W					7.3W				
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	284	287	299	343	362	525	531	553	634	669	811	820	854	980	1033
LUMENS PER WATT (lm/w)	114	115	120	137	145	119	121	126	144	152	111	112	117	134	142
CRI	92+	92+	92+	92+	92+	92+	92+	92+	92+	92+	92+	92+	92+	92+	92+

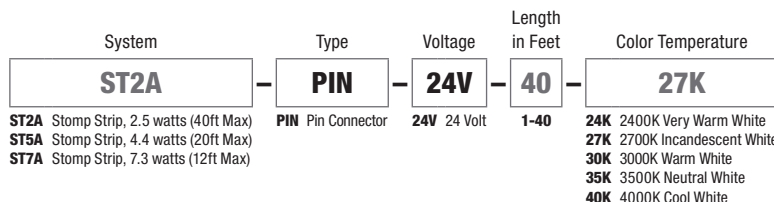



PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

WARM DIM, STOMP STRIP

24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 12.02.24

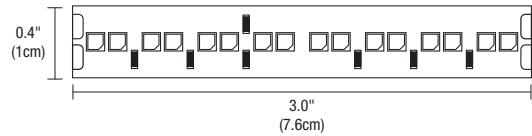

CAN'T STOMP ME OUT

Our Low Voltage Stomp Strip is highly durable, designed to withstand the harsh elements of a job site, and precision engineered to provide superior color rendering up to 94+ CRI. Warm Dim technology (**27D & 30D**) mimics an incandescent atmosphere by decreasing the color temperature as you dim. Our Warm Dim strips can be dimmed all the way down to a soothing amber hue at 1800K, reminiscent of candlelight along the halogen curve. Stomp Strip is used for our **DIY** (Do-it-Yourself) fixtures and systems. For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

FEATURES & BENEFITS

- Offered with pin connectors reducing time and labor during installation
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering and efficacy
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Suitable for indoor damp locations
- Warranty: Includes a 5-year pro-rated warranty

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 5WDC, 4.8 watts per foot - 20'

LAMP

- **27D** dims from 2700K down to 1800K, and **30D** dims from 3000K down to 2000K, resembling Halogen light sources.
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC
- 4.8 watts per foot
- Sold in 1' increments
- Field-cutable in 3" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring


- [Home Integration Solutions](#)
- [UNI Driver: Universal Dimming \(ELV, TRIAC, 0-10V\)](#)
- [ELV & TRIAC Smart Dimmer & Switch](#)
- [DALI/DALI-2](#)
- [Lutron Hi-Lume/Ecosystem](#)

*In-Wall Mounting and drop ceiling Kits available for select power supplies

APPROVALS

Class 2 Wiring up to 100 watts, Indoor Damp Location Suitable, RoHS, ETL listed.



NOMINAL LAMP DATA	ST5A	
WATTS PER FOOT	4.8W	
COLOR TEMPERATURE	27D	30D
LUMENS PER FOOT (lm/ft)	606	631
LUMENS PER WATT (lm/w)	126	131
CRI	94+	94+

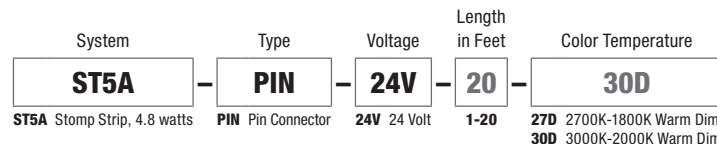

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PRO WARM DIM, STOMP STRIP

24VDC WITH PIN CONNECTORS

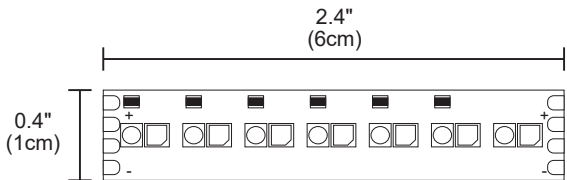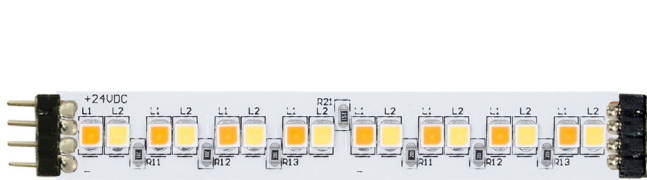

FEATURES & BENEFITS

- Pro Dim LED Strip provides adaptable dim to warm light with 0.1% Dim to off
- High CRI LEDs, offering superior color rendering and enhanced color
- Offered in 2W, 5W, & 7W watts per foot
- The 0.4" (10mm) wide strip contains 35 LEDs per foot (7 LEDs per 2.4" Increment): Tight spacing of LEDs produce uniform light distribution without visible diodes or pixelation when used within a diffused lens
- Gold Plated Contacts: Prevent oxidation ensuring longevity of the LEDs
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Applications: Indoor, damp and dry locations
- Warranty: Includes a 5-year pro-rated warranty

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 2WDC, 2.5 watts per foot - 40'
- 5WDC, 5 watts per foot - 20'
- 7WDC, 7.5 watts per foot - 12'

LAMP

- Available in 2700K **27KPD** (dims down to 1800K) and **3000K** (30KPD) that dims down to 2000K
- Linear Dimming Curve
- Designer Grade High CRI 92+ LEDs
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC, 120-277VAC Input
- 2.5, 5, and 7.5 watts per foot
- Sold in 1' increments
- Field-cutable in 2.4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring


- [Home Integration Solutions](#)
- [Pro Dim Power Supplies & Controls](#)

*In-Wall Mounting Kits available for select Power Supplies

APPROVALS

Class 2 Wiring up to 100 watts, Indoor Damp Location Suitable, RoHS, ETL listed.

NOMINAL LAMP DATA							
DESCRIPTION	ST2A KPD		ST5A KPD		ST7A KPD		
WATTS PER FOOT	2W (2.5 watts)		5W (5 watts)		7W (7.5 watts)		
COLOR TEMPERATURE	27KPD		30KPD		27KPD		30KPD
LUMENS PER FOOT (lm/ft)	165		426		523		548
LUMENS PER WATT (lm/w)	66		69		58		61
CRI	92+		92+		92+		92+

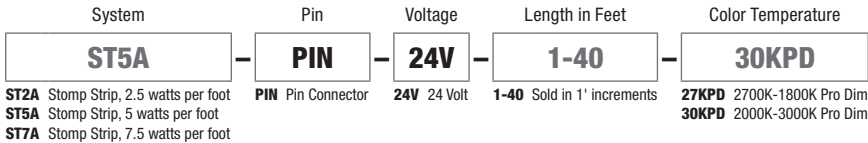


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

STOMP STRIP, TUNABLE WHITE

24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 12.02.24

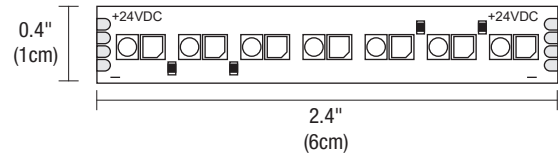

CAN'T STOMP ME OUT

Our Low Voltage Tunable White Stomp Strip is highly durable, designed to withstand the harsh elements of a job site, and precision engineered to provide superior color rendering up to 94+ CRI. Tunable White 2000K-6500K (**2K6K**) or 2700K-6500K (**27K6**) grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 6500K (Day Light White). Tunable white lighting visually, biologically and emotionally contributes to human interaction with the physical world. Human centric lighting (HCL) builds on this technology bringing the dynamics of natural daylight indoors, and delivering a positive effect on human health, well-being and performance. Stomp Strip is used for our **DIY** (Do-it-Yourself) fixtures and systems.

FEATURES & BENEFITS

- Offered with pin connectors reducing time and labor during installation
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering and efficacy
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Suitable for indoor damp locations
- Warranty: Includes a 5-year pro-rated warranty

LAMP

- Tunable White: 2000K-6500K (**2K6K**) and 2700K-6500K (**27K6**) grants independent control for adjusting color temperature and intensity
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC
- 2.5, 4.6, or 7.5 watts per foot
- Sold in 1' increments
- Field-cutable in 2.4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [Home Integration Solutions](#)
- Pure Smart™ WiZ Pro [Power Supplies & Controls](#)
- [0-10V](#) Requires two dimmers, one for intensity and one for color temperature
- [DMX & Controls](#)
- [DALI/DALI-2](#)

*In-Wall Mounting and drop ceiling Kits available for select power supplies

MAXIMUM LENGTHS BEFORE RE-FEEDING


- 2WDC, 2.5 watts per foot - 40'
- 5WDC, 4.6 watts per foot - 20'
- 7WDC, 7.5 watts per foot - 12'

APPROVALS

Class 2 Wiring, Indoor Damp Location Suitable, RoHS, ETL listed.

NOMINAL LAMP DATA	ST2A 2K6K									ST5A 2K6K									ST7A 2K6K								
WATTS PER FOOT	2.5 Watts									4.6 Watts									7.5 Watts								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	152	154	156	158	160	165	180	194	208	368	383	398	413	428	458	491	496	500	512	536	560	584	608	656	691	698	705
LUMENS PER WATT (lm/w)	82	77	78	79	80	82	90	97	115	80	80	83	86	89	95	102	103	109	80	74	78	81	84	91	96	97	110
CRI	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+

NOMINAL LAMP DATA	ST2A 27K6								ST5A 27K6								ST7A 2K6K							
WATTS PER FOOT	2.5 Watts								4.6 Watts								7.5 Watts							
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K			
LUMENS PER FOOT (lm/ft)	164	195	201	206	225	242	231	411	420	436	452	447	443	442	555	567	589	610	603	598	596			
LUMENS PER WATT (lm/w)	82	78	80	82	90	97	115	103	91	95	98	97	96	110	87	79	82	85	84	83	93			
CRI	94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+			

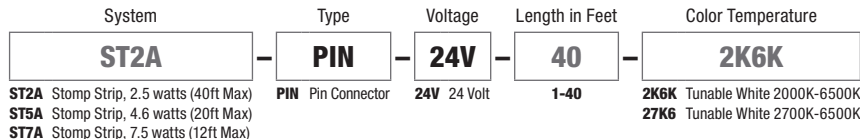

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

SOFT STRIP, RGB

24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 12.02.24



0.47"
(12mm)



DESCRIPTION

PureEdge RGB Soft Strip provides dynamic color effects with red, green and blue LEDs. Our color-changing LED strip provides bright, continuous light offered in two wattage options of 3 or 5 watts per foot. PureEdge's focus on chromacity quality provides a balanced output across the color gamut, allowing the creation of millions of beautiful colors. The flexible strip is sold in 1 foot increments. RGB Soft Strip can be controlled using a compatible 24 volt DC power supply with an integrated RGB DMX driver. Includes a flexible aluminum heat sink to extend LED life. Both Stomp Strip and Soft Strip are used for our **DIY** (Do-it-Yourself) fixtures and systems.

SPECIFICATIONS

- 24VDC, Class 2
- Power Consumption: 2.6 or 5 watts per foot
- Maximum Lengths Before Re-feeding: SS3- 36', SS5- 20'
- Sold in 1' increments
- Field-cutttable in increments: SS3- 4" SS5- 2.4"
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

MAXIMUM LENGTHS BEFORE RE-FEEDING

SS3, 2.6 watts per foot - 36'
SS5, 5 watts per foot - 20'

MOUNTING

Self-adhering SS6 mounts to most smooth finished surfaces with industrial strength 3M tape (provided on back of strip); some unfinished surfaces may require screw-in mounting clips **SS-MCL** (sold separately).

LAMP

- RGB: Dynamic Red, Green, and Blue
- Wattage options: 3 or 5 watts
- 50,000 Hour Lamp Life

ACCESSORIES (SOLD SEPARATELY)

- 24VDC Power Connectors and Jumpers
- Flexible Connectors
- Mounting Straps & Clips

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [Home Integration Solutions](#)
- [DMX & Controls](#)
- [DALI/DALI-2](#)

*In-Wall Mounting and drop ceiling Kits available for select power supplies

APPLICATIONS

Designed for any Indoor space, including Damp locations. Ideal applications in Residential, Commercial, Retail, and Hospitality environments.

APPROVALS

Class 2 Wiring, Indoor Damp Location Suitable, RoHS, ETL listed.


System	Type	Voltage	Length in Feet	Color Temperature
SS3	PIN	24V	36	RGB
SS3 Soft Strip 2.6 watts per foot (max 36')	PIN Pin Connector	24V 24 Volt	1-36 Sold in 1 ft. increments	RGB Dynamic Color Red, Green, and Blue
SS5 Soft Strip 5 watts per foot (max 20')				

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

SOFT STRIP, RGB+WHITE 24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 12.02.24

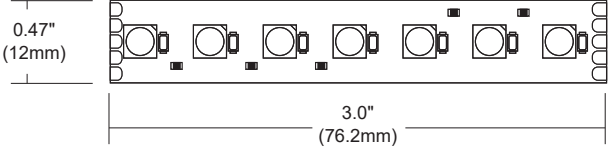

DESCRIPTION

PureEdge's RGB+White Soft Strip (**SS6**) provides dynamic color effects with red, green, blue plus white. Now offered with four choices of White; 2000K and special order in 2700K, 3000K, and 4000K. Our color-changing LED strip provides bright, continuous light, our focus on chromacity quality provides a balanced output across the color gamut, allowing the creation of millions of beautiful colors and pure white. The flexible strip is sold in 1 foot increments up to 16 ft with cutting increments every 3 inches. At 6.3 watts per foot, RGB+W can be controlled using a compatible 24 volt DC power supply with an integrated RGB DMX driver. SS6 includes a flexible aluminum heat sink to extend LED life. Includes 5 year pro-rated warranty.

SPECIFICATIONS

- 24VDC, Class 2
- Power Consumption: 6.3 watts per foot
- Maximum Length Before Re-feeding: 16'
- Sold in 1' increments
- Field-cutttable in 3" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

MOUNTING

Self-adhering SS6 mounts to most smooth finished surfaces with industrial strength 3M tape (provided on back of strip); some unfinished surfaces may require screw-in mounting clips **SS-MCL** (sold separately).

LAMP

- RGB+W: Dynamic Red, Green, Blue plus 2000K White
- Special order in 2700K, 3000K, and 4000K
- 50,000 Hour Lamp Life

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, CLASS 2 WIRING

- [Home Integration Solutions](#)
- [DMX & Controllers](#)
- [DALI/DALI-2](#)

*In-Wall Mounting and drop ceiling Kits available for select power supplies

ACCESSORIES (SOLD SEPARATELY)

- 24VDC Power Connectors and Jumpers
- Flexible Connectors
- Mounting Straps & Clips

APPLICATIONS

Designed for any Indoor space, including Damp locations. Ideal applications in Residential, Commercial, Retail, and Hospitality environments.

APPROVALS

Class 2 Wiring, Indoor Damp Location Suitable, RoHS, ETL listed.

System	Type	Voltage	Length in Feet	Color Temperature
SS6	PIN	24V	16	RGB20K
SS6 Soft Strip 6.3 watts per foot	PIN Pin Connector	24V 24 Volt	1-16 Sold in 1 ft. increments	RGB20K Red, Green, Blue + White 2000K RGB27K Red, Green, Blue + White 2700K Special Order RGB30K Red, Green, Blue + White 3000K Special Order RGB40K Red, Green, Blue + White 4000K Special Order


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TRUCOLOR™ RGB & TUNABLE WHITE LED STRIP

24VDC, 5 CHANNEL CONTROL, WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | PATENT PENDING

REV 12.02.24

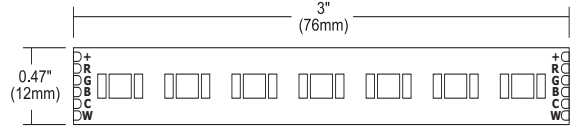

DESCRIPTION

PureEdge Pure Smart **TruColor™** technology uses five channels of tunable LEDs, composed of **RGBTW** red, blue, green, and Tunable White (**1500K-6500K**). With our precision-engineered, proprietary color mixing, we produce one of the widest, most accurate spectrums available, giving our customers access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. **TruColor™** LED's achieve an average CRI-Color Rendering Index of 94+ and a Duv of +-0.0021 in relation to the blackbody curve at any point on the spectrum of tunable white CCT. Dynamic Color Changing functionality provides millions of possibilities for intricate customization, rich saturated or secondary colors, and unprecedented ease of installation, making **RGBTW** the ideal choice for residential and commercial applications. **TruColor™ RGBTW** adds more than just decorative flexibility; it also helps to support a healthy Circadian Rhythm and well-being. Let **TruColor™** transform your space and the people within it. 24VDC Remote Power Supplies required.

FEATURES & BENEFITS

- State-of-the-Art **TruColor™** (1500K-6500K) spectrum offers dynamic effects with RGB and Tunable White
- Optimized for use with WiZ Pro wire control ecosystem and Pure Smart Wi-Fi Room Controller.
- Offered with pin connectors reducing time and labor during installation
- Dims from full brightness down to 5%, and tuned anywhere from 1500K to 6500K.
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering, CCT range, spectrum accuracy, or efficacy.
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- Three 1oz Layers of Copper Busbar per foot provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Warranty: Includes a 5-year pro-rated warranty

LUMEN PERFORMANCE

- **TruColor™ RGBTW** Red, Green, and Blue with Tunable White (**1500K-6500K**)
- S5W5 360lm/ft 5W @3000K
- S5W7 526m/ft 7W @3000K

AVERAGE PERFORMANCE 2000K-5500K

- Average CRI: 94+
- Average DUV: +-0.002
- Average R9: 91, RG: 103, RF:93
- Average Life: 50,000 hours

SPECIFICATIONS

- 24VDC
- S5W5: 5W RGB & 5W Tunable White
- S5W7: 5W RGB & 7W Tunable White
- Sold in 1' increments
- Field-cutable in 3" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

MAXIMUM LENGTHS BEFORE RE-FEEDING

- S5W5 – Pure Smart™ WiZ Pro: 20ft
- S5W7 – Pure Smart™ WiZ Pro: 12ft

REMOTE POWER SUPPLIES, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [Home Integration Solutions](#)
- [Pure Smart™ WiZ Pro Power Supplies](#)
- [Pure Smart™ Wi-Fi Controllers](#)

Features ON/OFF buttons, CCT and brightness control as well as four preset/custom scenes programmable in the WiZ app. Communicates via 2.4GHz Wi-Fi. No Hub needed. Voice control with Goggle Assistant, Alexa, Siri, Shortcuts, and IFTTT


APPLICATIONS

Designed for indoor use only. Ideal applications for residential, commercial, hospitality environments, and general human centric lighting.

APPROVALS

Class 2 Wiring up to 100 watts, Indoor Damp Location, ETL listed, RoHS.


NOMINAL LAMP DATA																			
WATTS PER FOOT	S5W5 5W RGB & 5W TUNABLE WHITE									S5W7 5W RGB & 7W TUNABLE WHITE									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	171	256	311	349	360	380	410	288	265	211	352	452	513	526	554	543	319	289	
LUMENS PER WATT (lm/w)	63	56	71	82	85	87	98	98	111	63	91	73	86	86	90	93	92	96	
CRI	91+	93+	94+	94+	95+	96+	97+	92+	89+	93+	95+	96+	97+	97+	98+	97+	95+	92+	
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	-0.003	0.0002	0.003	0.003	0.003	0.0009	0	0.003	0.003	
Rf	91	93	94	94	95	94	94	92	90	92	93	95	95	95	95	94	92	91	
Rg	105	101	103	105	104	102	100	102	103	104	100	102	103	103	101	100	102	103	
R9	90	90	90	94	97	97	91	81	70	91	90	90	94	95	93	93	79	67	
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88	
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85	
WIZ PRO WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.4	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3	

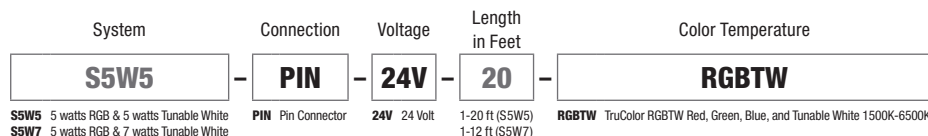

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

TRUCOLOR™ RGB & TUNABLE WHITE LED STRIP

24VDC, 5 CHANNEL CONTROL

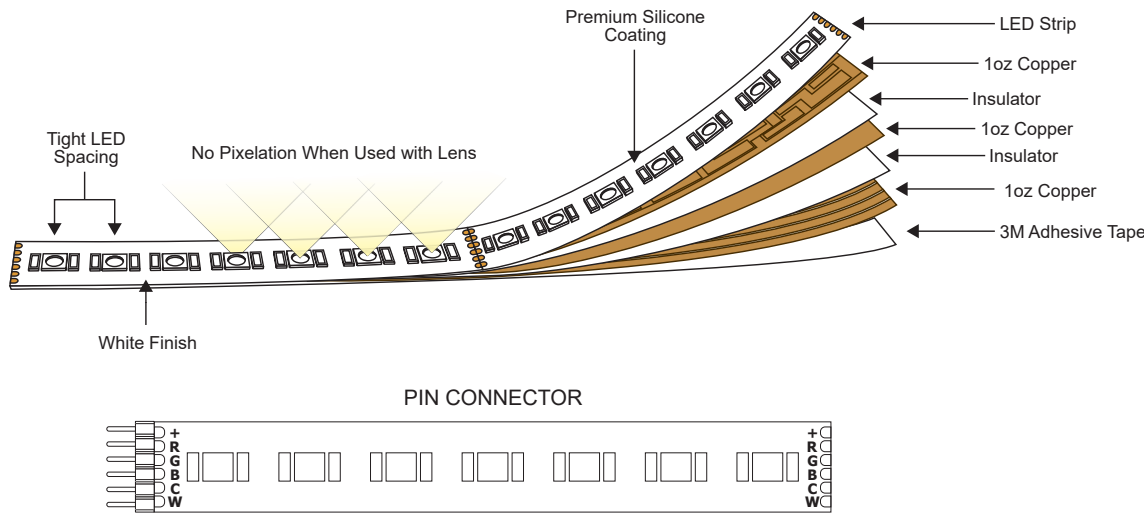

S5W5 WATTS PER FOOT			
LENGTH IN FEET	RGB Wattage	Tunable White Wattage	Pure Smart™ WiZ Pro Wattage
1	5	5	5
2	10	10	10
3	15	15	15
4	20	20	20
5	25	25	25
6	30	30	30
7	35	35	35
8	40	40	40
9	45	45	45
10	50	50	50
11	55	55	55
12	60	60	60
13	65	65	65
14	70	70	70
15	75	75	75
16	80	80	80
17	85	85	85
18	90	90	90
19	95	95	95
20	100	100	100

S5W7 WATTS PER FOOT			
LENGTH IN FEET	RGB Wattage	Tunable White Wattage	Pure Smart™ WiZ Pro Wattage
1	5	7	7
2	10	14	14
3	15	21	21
4	20	28	28
5	25	35	35
6	30	42	42
7	35	49	49
8	40	56	56
9	45	63	63
10	50	70	70
11	55	77	77
12	60	84	84

SOFT STRIP, MONOCHROMATIC COLOR

24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | PATENT PENDING


REV 12.02.24




RRR - Red



BBB - Blue



AAA - Amber



GGG - Green

0.5"
(1.27cm)

4"
(10.16cm)

DESCRIPTION

PureEdge Monochromatic Color Soft Strip provides dynamic color effects with monochromatic color LEDs. Offered in Red, Amber, Blue, and Green. The 1/2" wide flexible copper strip, with an optically clear protective coating, is sold in 1ft increments up to 36 ft with cutting increments every 4 inches. Self-adhering, our strip mounts to most smooth finished surfaces with the industrial strength 3M tape on the back. Our Soft Strip is used for our **DIY** (Do-it-Yourself) fixtures and systems. Includes 5 year warranty.

SPECIFICATIONS

- 24VDC, Class 2
- Power Consumption: 2.6 or 5 watts per foot
- Sold in 1' increments
- Field-cuttable in 4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

MOUNTING

Industrial 3M tape lines back of strip for self-adhesion to most smooth finished surfaces Additional Connectors, Mounting Straps, and Clips may be needed for some applications (sold separately).

ACCESSORIES (SOLD SEPARATELY)

- 24VDC Power Connectors and Jumpers
- Flexible Connectors
- Mounting Straps & Clips

LAMP

- Monochromatic Red, Amber, Blue, and Green
- 18 LEDs per foot
- 50,000 Hour Lamp Life

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 3WDC, 2.6 watts per foot - 36'
- 5WDC, 5 watts per foot - 20'

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [Home Integration Solutions](#)
- Pure Smart™ WiZ Pro [Power Supplies & Controls](#)
- [UNI Driver: Universal Dimming \(ELV, TRIAC, 0-10V\)](#)
ELV & TRIAC [Smart Dimmer & Switch](#)
- [Lutron](#) Hi-Lume/Ecosystem
- [DALI/ DALI 2](#)

*In-Wall Mounting Kits available for select power supplies

APPLICATIONS

Indoor and damp locations. Applications include coves, toe-kicks, under cabinets and shelving, bookcases, drawers, pathways, accent lighting, task lighting, and general illumination.

APPROVALS


Class 2 Wiring up to 100 watts, Indoor Damp Location Suitable, RoHS, ETL listed.

System	Type	Voltage	Length In Feet	Color Temperature
SS3	PIN	24V	36	AAA
SS3 Soft Strip Commercial Grade, 2.6 watts per foot (max 36')	PIN Pin Connector	24V 24 Volt	1-36 1-36 feet	AAA Amber
SS5 Soft Strip Commercial Grade, 5 watts per foot (max 20')				BBB Blue
				GGG Green
				RRR Red

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING/DOOR DO-IT-YOURSELF

24VDC PLASTER-IN 5/8" DRYWALL PLASTER-IN LED SYSTEM

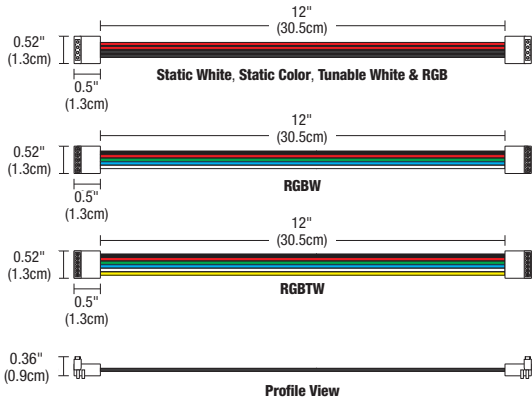


B90 CONNECTORS

B90 Connectors are supplied with end power components. The ordering code below is to be used for replacements only.

System	Type	Type	Color Temperature Options
SS	PFE	2XB90	BLANK
SS Soft Strip	PFE Power Feed	2XB90 2-Sided 90° Power Feed Connector	RGBW Red, Green, Blue and White RGBTW RGBTW (RGB + Tunable White 1500k-6500K) *Leave blank for Static White, Static Color, Tunable White and RGB

PIN CONNECTORS


Extra soldering pin connectors. Male and female.

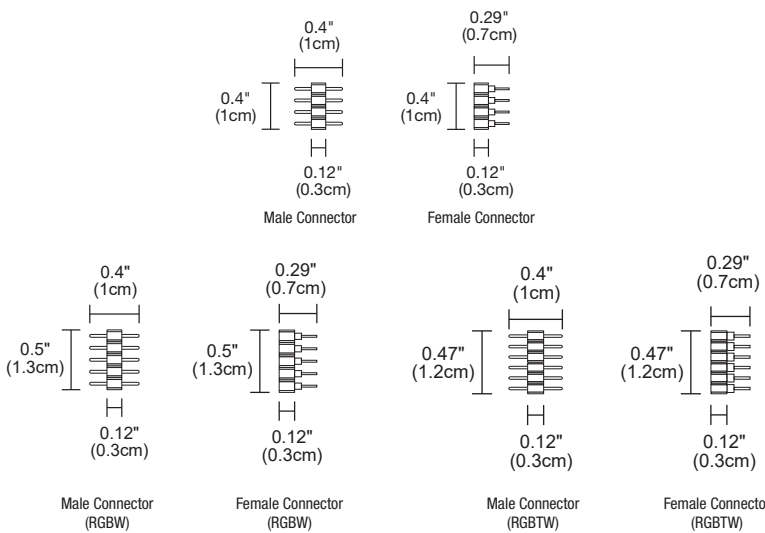

System	Product	Type	Color Temperature
SS	ML	CON	BLANK
SS Stomp Strip/Soft Strip	FE Female Connector ML Male Connector	CON Connector	RGBW Red, Green, Blue + White (RGB White Compatible) RGBTW Red, Green, Blue, and Tunable White Leave Blank for Static White, Warm Dim, Monochromatic Color and Tunable White

U-STRAP


Use every 6-12 inches for extra support (30/package).

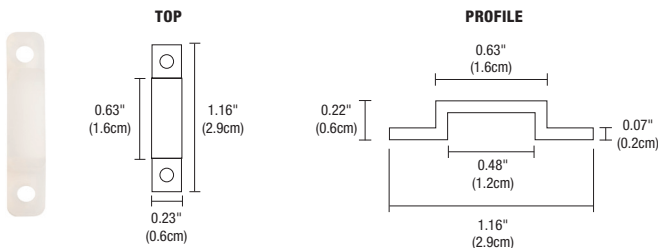

Product	Type
SS	SU
SS Strip Strap	SU U-Strap

TIE STRAP

Use every 6-12 inches for extra support (30/package).

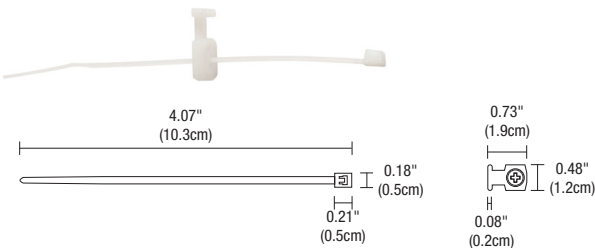

Product	Type
SS	ST
SS Strip Strap	ST Tie Strap

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PURE SMART™ Wi-Fi 120V ROOM CONTROLLER

CONNECTED BY WiZ PRO



DESCRIPTION:

The Pure Smart™ Wi-Fi Room Controller works with any WiZ Connected Smart fixtures/lamps. The Room Controller grants independent adjustment of both color temperature and intensity, as well as scene selection for Single Channel/Static, Tunable White, and TruColor™ RGBTW Fixtures. Four preset scenes can be associated with the room controller via the WiZ App. Custom scenes can be created using multiple layers of light, colors, and can include Pure Smart Wi-Fi Dimmer and Switch as well. No Hub required. Room Controller communicates with fixtures directly on the Local Area Network allowing for control even if the Wi-Fi goes down. Compatible with WiZ Connected fixtures only. For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

OPERATION

Features ON/OFF buttons, CCT and brightness control rockers, and 4 preset/custom scene selections. Maximum output of 600W for hardwired WiZ Connected devices. No load restriction when load wire is not used and devices are connected wirelessly to Room Controller. Communicates with 2.4GHz Wi-Fi only. No Hub Required.

EASY INSTALLATION

The Pure Smart™ Wi-Fi Room Controller installs just like a traditional dimmer. 120V power is all that is needed. Switch leg is optional for CWW-TW-SCENE-WH. This is also offered in a completely wireless version (See Pure Smart Remote Room Controller CWR-TW-SCENE-WH). Compatible with standard gangable boxes. Requires neutral wire. No Hub Required.

WiZ APP

The Room Controller is added as an accessory in the WiZ app (Available on iOS or Android) and communicates directly to the WiZ enabled light fixture via direct wi-fi signal on Local Area Network (LAN). Voice control enabled when used in conjunction with Google Assistant, Siri, Alexa, IFTTT, and SmartThings. Grouping, zoning, scheduling, and custom scenes can all be programmed with the WiZ app or WiZ Pro Dashboard.

BODY

Durable polycarbonate body, compatible with decorator style wall plate (not included).


SECURITY

3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

SPECIFICATIONS

Approved Location	Dry / Indoor
Input Voltage	120Vac - 60 Hz
Certification	cULus, FCC
Compatible Load(s)	WiZ Connected products only
Maximum Power	600W (Hardwired Loads), No Maximum for Wireless Loads
Output Current	5A
Power Consumption	Relay OFF: 0.07W Soft OFF: 0.79W ON: 0.79W
Dimming	Dims to 3%
Operating Temperature	23°F~113°F (-5°C~45°C)
Wireless Frequency	2.4GHz
Wireless Standard	IEEE 802.11
Warranty	3 Year

Product	Type	Finish
CWW	TW-SCENE	WH
CWW Controller, Wall Mount, WiZ Pro connected	TW-SCENE Tunable White + Scenes	WH White

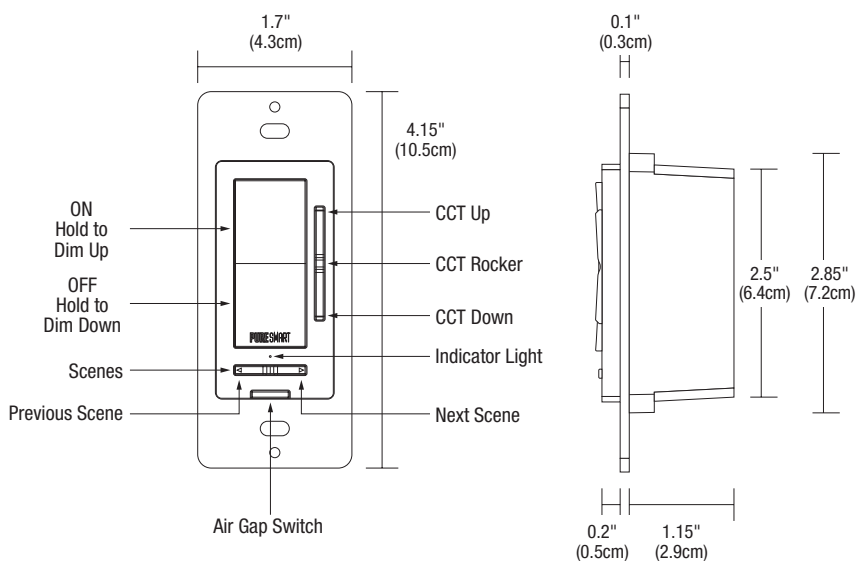

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING/DOOR DO-IT-YOURSELF

24VDC PLASTER-IN 5/8" DRYWALL PLASTER-IN LED SYSTEM

2.5 WATTS PER FOOT

LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS
1	3	11	27	21	51	31	75
2	5	12	29	22	54	32	78
3	8	13	32	23	56	33	80
4	10	14	34	24	58	34	82
5	13	15	37	25	61	35	85
6	15	16	39	26	63	36	87
7	17	17	41	27	66	37	90
8	20	18	44	28	68	38	92
9	22	19	46	29	70	39	94
10	25	20	48	30	73	40	96

5 WATTS PER FOOT

LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS
1	5	6	29	11	53	16	77
2	10	7	34	12	58	17	82
3	14	8	38	13	63	18	87
4	19	9	43	14	67	19	91
5	24	10	48	15	72	20	96

7.5 WATTS PER FOOT

LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS	LENGTH IN FEET	WATTS
1	8	4	30	7	53	10	75
2	15	5	38	8	60	11	83
3	23	6	45	9	68	12	90

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


TM30 DATA

24VDC WITH PINS & SOLDERED LEADS

TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92	-2.4%	1.5%
2	94.7	-2.1%	-0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference


HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TM30 DATA
24VDC WITH PINS & SOLDERED LEADS

TM-30-15 DATA: The data below is for bare LED Warm Dim Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2700D | Rf: 90.7 | Rg: 101.1
Color Vector Graphic



Test Reference

Table with 4 columns: HUE BIN, Rf, CHROMA, HUE. Rows 1-16 showing color shift data for 2700D.

3000D | Rf: 90.6 | Rg: 101.1
Color Vector Graphic




Test Reference

Table with 4 columns: HUE BIN, Rf, CHROMA, HUE. Rows 1-16 showing color shift data for 3000D.


TM30 DATA
24VDC WITH PINS & SOLDERED LEADS

TM-30-15 DATA: The data below is for Pro Dim bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (30KPD)
View Angle: 2 Deg

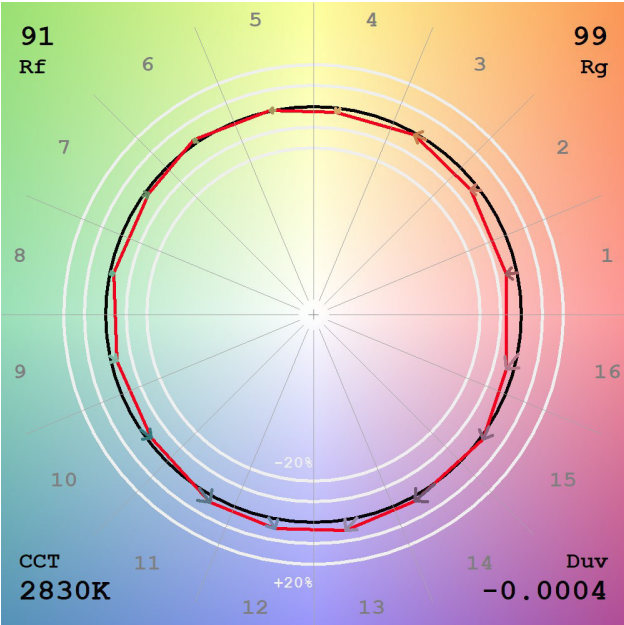

3000K ONLY (30KPD)
View Angle: 2 Deg

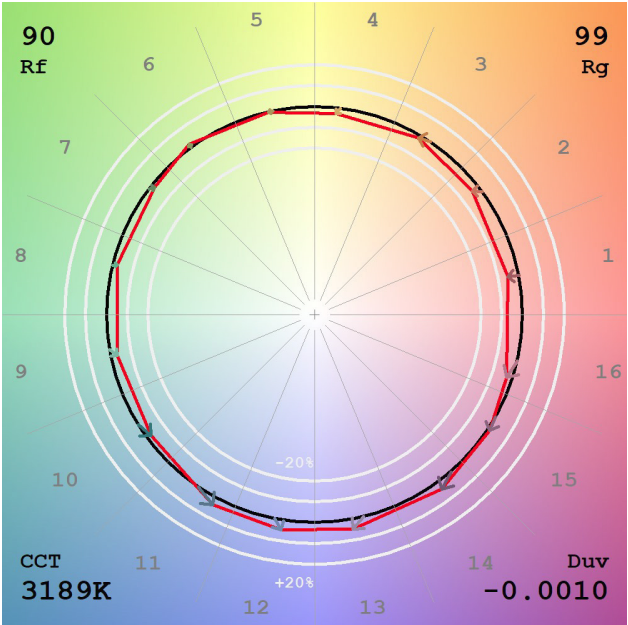

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


TM30 DATA

24VDC WITH PINS & SOLDERED LEADS

TM-30-15 DATA: The data below is for Tunable White bare LED Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K6K/27K6) | Rf: 90.6 | Rg: 98.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	87.7	-5.5%	1.2%
2	88.7	-3.9%	4.2%
3	90.5	-1.5%	4.3%
4	95.0	-1.7%	0.8%
5	95.2	-0.2%	2.1%
6	94.2	1.6%	1.9%
7	95.9	-0.8%	-2.2%
8	95.5	-1.7%	1.3%
9	93.8	-1.4	2.6%
10	91.9	-0.7%	4.2%
11	91.3	3.6%	3.7%
12	91.2	4.2%	-1.0%
13	86.6	3.8%	-12.7%
14	67.2	-3.0%	-16.3%
15	84.9	-3.3%	-9.4%
16	84.2	-5.7%	-7.5%

3000K (2K6K/27K6) | Rf: 90.5 | Rg: 100.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	91.5	-3.5%	1.2%
2	92.4	-1.8%	2.7%
3	89.8	0.3%	4.5%
4	92.4	-1.7%	0.4%
5	93.3	-0.1%	1.4%
6	94.5	2.1%	-0.6%
7	91.0	-2.5%	0.3%
8	96.9	-0.8%	-0.2%
9	91.6	-0.9%	4.6%
10	86.7	0.7%	7.8%
11	86.3	3.8%	8.5%
12	88.3	6.1%	0.6%
13	90.9	3.1%	-5.2%
14	87.3	4.7%	-7.9%
15	92.1	-1.9%	-2.5%
16	84.5	-0.9%	-10.9%

4000K ONLY (2K6K/27K6) | Rf: 86.4 | Rg: 96.1

Color Vector Graphic



■ Test ■ Reference


		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	86.5	-5.5%	1.3%
2	90.4	-3.0%	2.3%
3	89.8	-2.1%	3.6%
4	89.1	-3.4%	0.4%
5	88.5	-5.9%	0.1%
6	93.6	-3.0%	-0.4%
7	88.9	-6.2%	1.7%
8	87.3	-5.0%	4.9%
9	82.4	-3.6%	11.3%
10	77.4	-1.8%	12.7%
11	79.8	4.9%	11.4%
12	88.7	4.4%	2.7%
13	88.7	4.0%	-5.1%
14	91.2	2.2%	-3.8%
15	82.7	-0.1%	-9.2%
16	82.8	-2.2%	-7.6%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


TM30 DATA
24VDC WITH PINS & SOLDERED LEADS

TM-30-15 DATA: The data below is for Pure Smart TruColor™ RGBTW Lamps.


2000K (TruColor™ RGBTW)
View Angle: 2 Deg

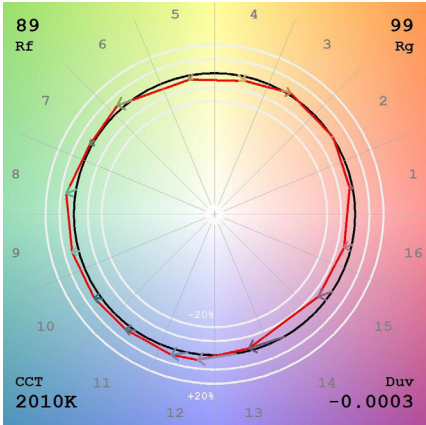


2200K (TruColor™ RGBTW)
View Angle: 2 Deg

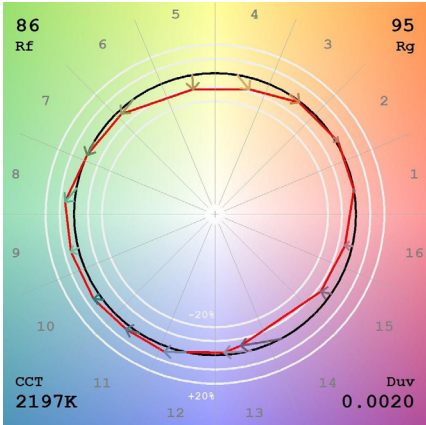


2400K (TruColor™ RGBTW)
View Angle: 2 Deg

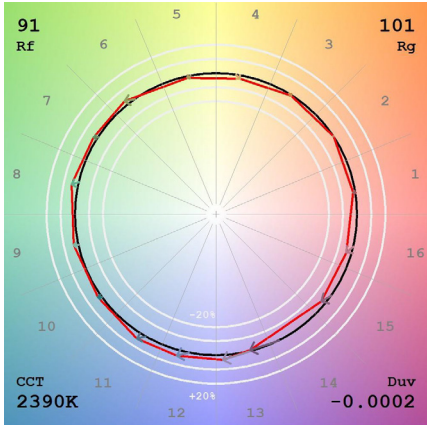


2700K (TruColor™ RGBTW)
View Angle: 2 Deg

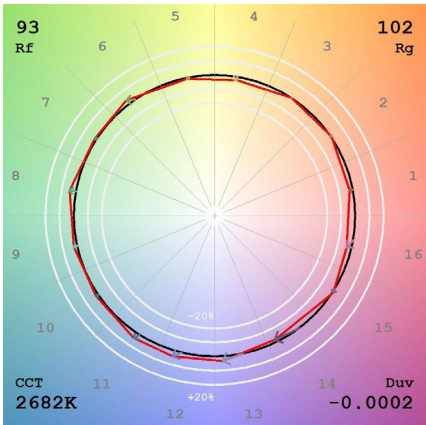


3000K (TruColor™ RGBTW)
View Angle: 2 Deg

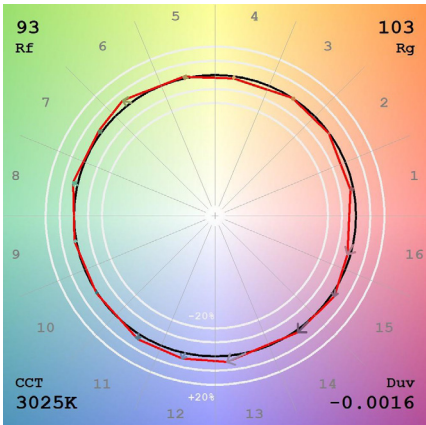


3500K (TruColor™ RGBTW)
View Angle: 2 Deg

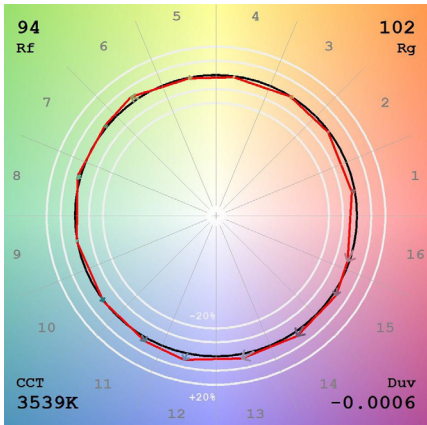


4000K (TruColor™ RGBTW)
View Angle: 2 Deg

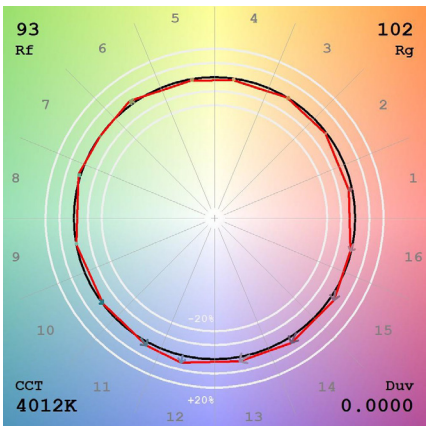

5700K (TruColor™ RGBTW)
View Angle: 2 Deg

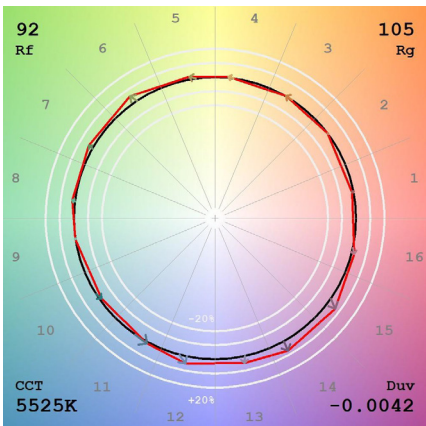

6500K (TruColor™ RGBTW)
View Angle: 2 Deg

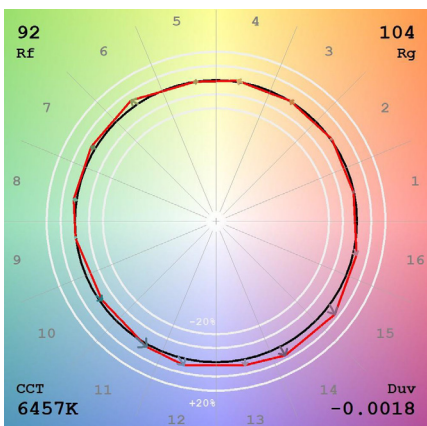

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--