

VERGE CEILING TRUCOLOR™ RGB & TUNABLE WHITE

24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL



DESCRIPTION

Verge Ceiling is another innovative design that comes from the family of plaster-in 24VDC systems pioneered by PureEdge that recesses within 5/8" drywall without any framing modification required. Continuing to redefine the relationship between lighting, architecture and interior design, this visionary system elegantly highlights ceiling perimeters while emitting smooth and continuous ambient illumination. Ordered in 1' field-cutttable increments up to 20'. The slim plaster-in aluminum extrusion has a 4" paintable backer plate. Offered in multiple color temperatures and wattage options. Included with the RGBTW Complete Fixture ordering code is a 6 pin connector that will be wired with a 6 conductor cable to the remote Pure Smart power supply. Remote PSBB Power Supply with Integral Bridgebox is required (PSBB-96W-WZ-TC5W5-RL sold separately). Verge brings together a Modern and Dynamic appearance to Residential and Commercial environments, offering unlimited creativity and empowering you to design One-of-a-kind spaces every time. Coordinate installation with electrical and drywall contractors. Includes a 5-year pro-rated warranty. For custom quotes and layout assistance, send drawings to design@PureEdgeLighting.com. Designed by Gregory Kay.

DESIGN NOTE

Verge Ceiling can be installed on a single surface, such as the perimeter of the ceiling, to accentuate or highlight Coves and other Architectural elements. Ambient and harmonious, the plaster-in LED system blends into 5/8" thick drywall to enhance the contemporary aesthetic of interior spaces. Verge offers unsurpassed precision and flexibility that transforms spaces into thoughtful and refined works of art.

INCLUDED COMPONENTS

1RE Junction Box, Adjustable Mounting Bars, Backer Plate, Verge Ceiling Channel(s), LED Strip, and Lens(es)

SPECIFICATIONS

- 24VDC
- 5W5: 5W RGB & 5W Tunable White, 5 watts/ft max
- 5W7: 5W RGB & 7W Tunable White, 7 watts/ft max
- Maximum lengths before re-feeding: 5W5 – 20 ft, 5W7 – 12 ft

APPLICATIONS

Indoor damp or dry locations only. Ideal for Ceiling Perimeters and outlining Architectural Elements in Residential, Commercial, Retail, Education, or Healthcare Institutions and Hospitality environments.

COMPLIANCE

ETL, Class 2, Damp Location, Made in USA.

For quick & easy reference, plus the most up-to-date pricing, use our [Verge Wall Configurator](#).

TRUCOLOR™ RGB & TUNABLE WHITE TECHNOLOGY

Pure Smart TruColor™ technology uses five channels of tunable LEDs, composed of **RGBTW** red, blue, green, and Tunable White (**1500K-6500K**). With our precision-engineered, proprietary color mixing, we produce one of the widest, most accurate spectrums available, giving our customers access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. TruColor™ LED's achieve an average CRI-Color Rendering Index of 97+ and a Duv of +-0.0021 in relation to the blackbody curve at any point on the spectrum of tunable white CCT. Dynamic Color Changing functionality provides millions of possibilities for intricate customization, rich saturated and secondary colors, and unprecedented ease of installation, making **RGBTW** the ideal choice for residential and commercial applications. TruColor™ **RGBTW** adds more than just decorative flexibility; it also helps to support a healthy Circadian Rhythm and well-being. Let TruColor™ transform your space and the people within it. [Click here for all other color temperatures](#).

LUMEN PERFORMANCE

- TruColor™ RGBTW Red, Green, and Blue with Tunable White (**1500K-6500K**)
- 5W5 118LM/FT 5W @3000K
- 5W7 172LM/FT 7W @3000K

AVERAGE PERFORMANCE 2000K-5500K


- Average CRI (5W7): 97+
- Average Duv (5W7): +-0.002
- Average R9: 91, RG: 102, RF:93
- Average life: 50,000 hours

REMOTE POWER SUPPLIES, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- Pure Smart™ WiZ Pro PSBB [Power Supplies](#) & [Smart Controls](#)
- Pure Smart™ PSBB Power Supply with integral Bridgebox is developed to provide the wireless communication for Pure Smart TC TruColor RGBTW luminaires connected by WiZ Pro.
- Pure Smart™ WiZ Pro PSBR [Power Supplies](#) & [Smart Controls](#)

PureEdge is the Original Designer of 5/8" Drywall Products, Backed by Over 30 Years of Precision Manufacturing and Design.

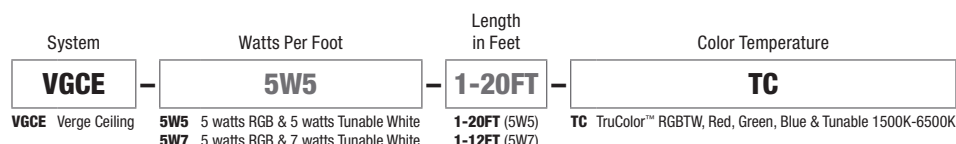

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING TRUCOLOR™ RGB & TUNABLE WHITE

24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL

NOMINAL DELIVERED LUMENS

DESCRIPTION	5W5 5W RGB & 5W TUNABLE WHITE									5W7 5W RGB & 7W TUNABLE WHITE								
WATTS PER FOOT	5W Tunable White									7W Tunable White								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	56	84	102	114	118	124	134	94	87	69	115	148	168	172	181	177	104	94
LUMENS PER WATT (lm/w)	21	18	23	27	28	29	32	32	32	21	30	24	28	28	29	30	30	30
CRI	91.8	93.8	94.5	94.9	95.5	96.9	97.2	92.1	89.8	93	95	96	97	97	98	97	95	93
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	-0.0030	0.0002	0.0030	0.0030	0.0030	0.0009	0.0000	0.0030	0.0030
Rf	91	93	94	94	95	94	94	92	90	92	93	95	95	95	95	94	92	91
Rg	105	101	103	105	104	102	100	102	103	104	100	102	103	103	101	100	102	103
R9	90	90	90	94	97	97	91	81	70	91	90	90	94	95	93	93	79	67
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85
WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.75	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3.2

LENGTH LOAD CHARTS: To determine the necessary wire gauge use our [Voltage Drop Calculator](#).


5W5 WATTS PER FOOT			
Length In Feet	RGB Wattage	Tunable White Wattage	WiZ Pro Wattage
1	5	5	5
2	10	10	10
3	15	15	15
4	20	20	20
5	25	25	25
6	30	30	30
7	35	35	35
8	40	40	40
9	45	45	45
10	50	50	50
11	55	55	55
12	60	60	60
13	65	65	65
14	70	70	70
15	75	75	75
16	80	80	80
17	85	85	85
18	90	90	90
19	95	95	95
20	100	100	100

5W7 WATTS PER FOOT			
Length In Feet	RGB Wattage	Tunable White Wattage	WiZ Pro Wattage
1	5	7	7
2	10	14	14
3	15	21	21
4	20	28	28
5	25	35	35
6	30	42	42
7	35	49	49
8	40	56	56
9	45	63	63
10	50	70	70
11	55	77	77
12	60	84	84


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING TRUCOLOR™ RGB & TUNABLE WHITE

24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL

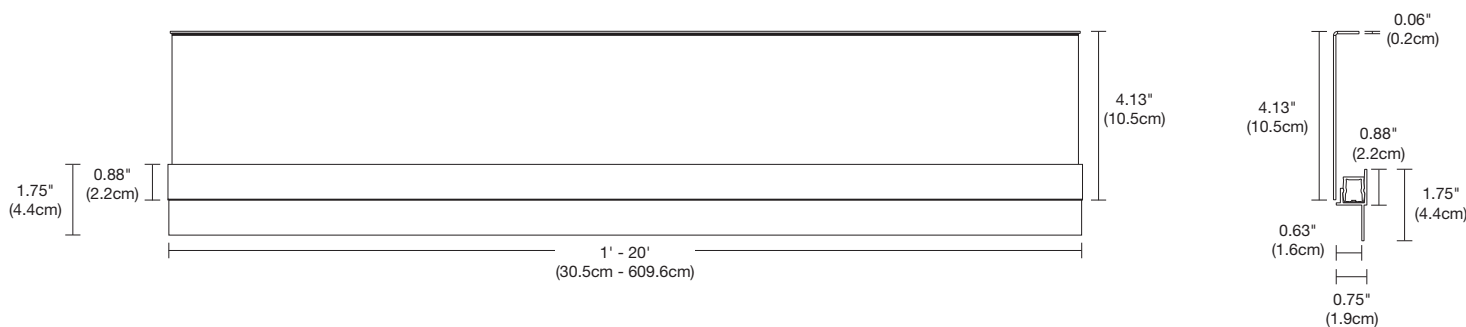

INCLUDED COMPONENTS

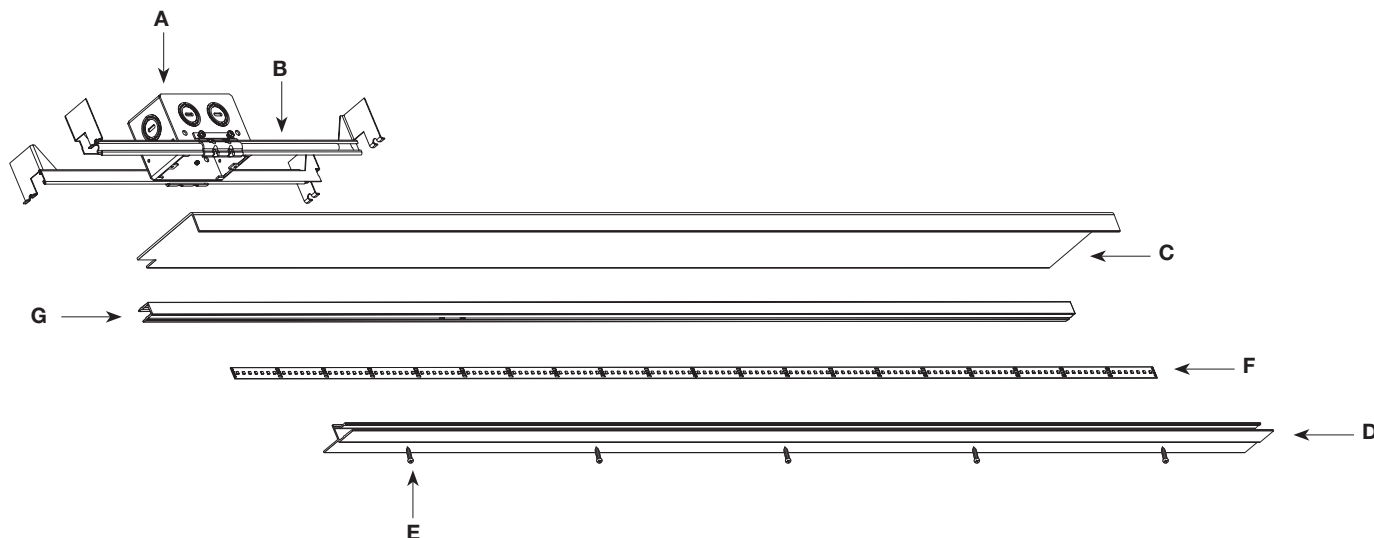

A. JUNCTION BOX

Mounts behind drywall with Adjustable Mounting Bars. Low Voltage 24VDC wires from Remote Power Supply connect to LED wires inside box. Junction Box opening is covered by the channel, and required at the beginning of each run.

B. ADJUSTABLE MOUNTING BARS

Provide flexibility for mounting in a variety of spaces and orientations. May be secured to studs that are spaced 13"-24" apart.

C. BACKER PLATE

4" paintable aluminum plate that conceals Junction Box and reflects light.

D. VERGE CEILING CHANNEL

5/8" deep extrusion houses a single row of LED Strip.

E. DRYWALL SCREWS


Secures channel to drywall and stud.

F. LED STRIP

Your selection of LED Strip CCT.

G. LENS

0.6" wide diffused white lens projects a clean line of light without pixelation.

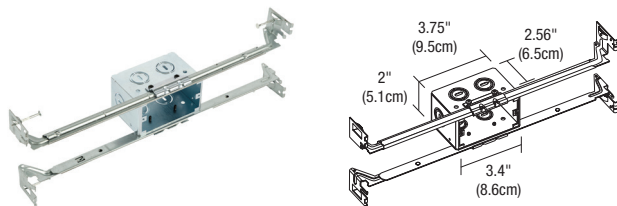

JUNCTION BOX ROUGH-IN COMPONENT

One Junction Box is included with Verge Ceiling. Order additional Junction Box separately to rough-in electrical wiring before drywall installation. Quick shipment available.


System	Size	Component
VG	1RE	JBOX
VG Verge	1RE 1" Rectangle	JBOX Junction Box

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING TRUCOLOR™ RGB & TUNABLE WHITE

24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL


REPLACEMENT PARTS

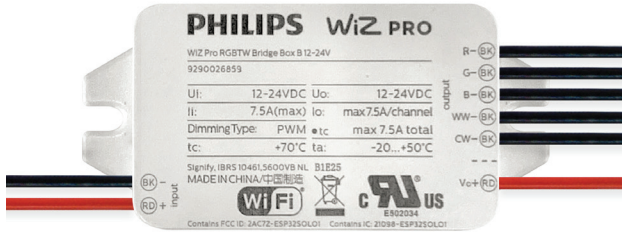

PURE SMART/WIZ PRO UR BRIDGEBOX

WIZ Pro UR Bridgebox is included with 4" Square Junction for TBar ceilings and allows for integration into the WiZ Pro wireless control ecosystem. The part numbers below are to be used for replacement only. Pure Smart/WiZ Pro UR Bridgeboxes are pre-programmed with Pure Smart app icons, and proprietary color mixing for tunable white and RGBTW.

Type	Color Temperature Options	System
BRBOX - UR96W	TC5W5	RL
BRBOX Bridgebox	TC5W5 TruColor™ RGBTW 5 watts RGB & 5 watts Tunable White TC5W7 TruColor™ RGBTW 5 watts RGB & 7 watts Tunable White	RL Recessed Linear

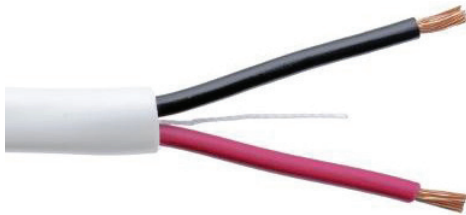

14/2 PLENUM RATED CABLE

White 14 AWG , 2 Conductors with CMP-Plenum rated jacket and 99.99% OFC stranded bare copper. Necessary from Remote Power Supply to fixture up to 40' away. Cable sold by the foot.


Product	Gauge Size	Conductors
PLEN	14G	2C
PLEN Plenum Cable	14G 14 Gauge	2C 2 Conductors



POWER FEED/FLEXIBLE CONNECTOR

Included with Center Feed Power components. Part numbers listed below to be used for replacements only. For use with Static White, Warm Dim, Tunable White, RGB and Monochromatic color temperatures. Flexible Connectors link two sections of LED Strip end to end. To use as a Power Feed cut off the male end, and connect to the Power Supply.

Product	Type	Component	Orientation	Size	Color Temperature Options
SS	FE	CON	LBL	6IN	RGBTW
SS Stomp Strip/Soft Strip	FE Female Pins	CON Connector	LBL Flexible 90° Left LBR Flexible 90° Right	6IN 6 inches	RGBTW TruColor™ RGBTW (RGB + Tunable White 1500k-6500K)



WET AND DAMP LOCATION CABLE ORDER PER FOOT



Our Wet Location, 6 Conductor, 14 Gauge Cable is a durable and adaptable cable suitable for transmitting power, control, and switching in indoor and outdoor wet and damp environments. Cable sold by the foot, simply specify the length needed by the foot. Keep within 50 ft between fixture and power supply. Cable sold by the foot, simply specify the length needed by the foot.

Product	Gauge	Cable
OC	14G	6C
OC Outdoor Cable	14G 14 Gauge	6C 6 Conductor

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING TRUCOLOR™ RGB & TUNABLE WHITE 24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL


REPLACEMENT PARTS

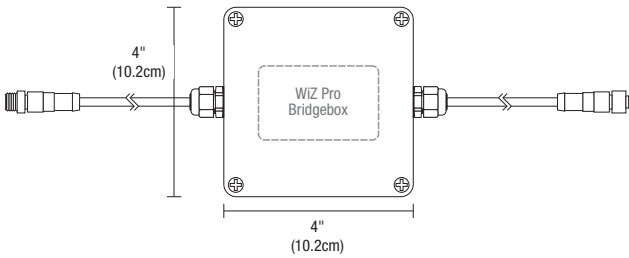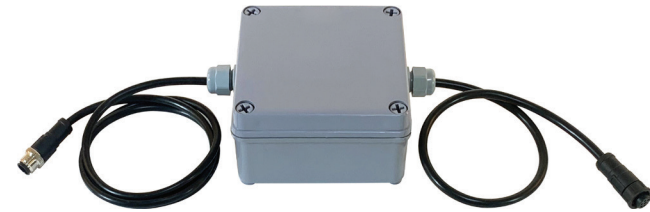

PURE SMART WET LOCATION JUNCTION BOX WITH 8FT POWER CABLE AND WIZ PRO UR BRIDGEBOX

This watertight Junction Box is especially designed for lighting in wet and damp locations. The Junction Box comes standard with a 8ft of outdoor cable and both male and female barrel connectors providing easy, safe, and reliable connections for 24V low voltage luminaires. Included with the Junction Box is one WIZ Pro type Bridgebox allowing for 5 Channel wireless control of the TruColor RGBTW luminaire. This box is approved for indoor and outdoor usage and complies with all the requirements of UL1241 and the National Electric Code.

Product	Type	Wattage	Controls	Type	Option	System
BR	JBC	96W	WZ	TC5W5	W	FN
BR Bridgebox for LED Soft Strip and Flex Neon	JBC Outdoor Junction Box with two Barrel Connectors, 4 conductor input and 6 conductor output.	96W 96 Watts	WZ Wiz Connected Bridgebox Included	TC5W5 5 Watts RGB & 5 Watts Tunable White TC5W7 5 Watts RGB & 7 Watts Tunable White	W Wet Location	FN Flex Neon

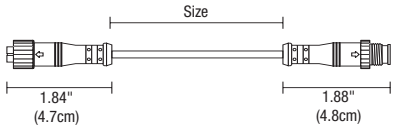

RGBTW 24VDC POWER OUTPUT CABLE 6 PIN CONNECTOR WET LOCATION

The flexible power cable connector is designed to provide a safe and reliable waterproof connection between the output of the Pure Smart/WiZ Pro Bridgebox and the Flex Neon Channel with 6 pin barrel connectors. This Flexible Connector is easy to install and configure, helping you create innovative lighting designs in an outdoor commercial or residential space.

Product	Type	Size	Color Temperature	Option
SS	CFX	12IN	RGBTW	W
SS Soft Strip and Flex Neon	CFX Flexible 6 Wire Connector	12IN 12" 96IN 96"	RGBTW TruColor Red, Green, Blue & Tunable White	W Wet Location




RGBTW 24VDC POWER OUTPUT CABLE 6 PIN T-CONNECTOR WET LOCATION

Our 6 Pin RGBTW Wet Location T-Connector is a robust rugged design especially suited to withstand the channels of damp and wet environments. This unique T-Connector has one Male and two Female Connectors and is suitable for multiple indoor and outdoor uses. Versatile design is easy to use, making installation quick and efficient.

Product	Type	Color Temperature	Option
SS	TC	RGBTW	W
SS Soft Strip and Flex Neon	TC T-Connector	RGBTW TruColor Red, Green, Blue & Tunable White	W Wet Location

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

REPLACEMENT PARTS

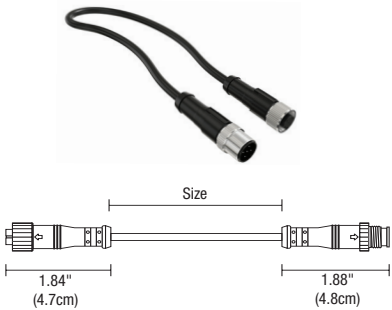

24VDC INPUT POWER 4 PIN CABLE CONNECTOR WET LOCATION

The flexible power cable connector is designed to provide a safe and reliable waterproof connection between the output of the 24V power supply and the input of the Pure Smart/WiZ Pro Bridgebox with 4 pin barrel connectors. This Flexible Connector is easy to install and configure, helping you create innovative lighting designs in an outdoor commercial or residential space.

Product	Type	Size	Option
SS	CFX	12IN	W
SS Soft Strip and Flex Neon	CFX Flexible 4 Wire Connector for 24VDC input side on Bridge box	12IN 12" 96IN 96"	W Wet Location



24VDC INPUT POWER 4 PIN CABLE T-CONNECTOR WET LOCATION

Our Wet Location T-Connector is a robust rugged design especially suited to withstand the challenges of damp and wet environments. This unique T-Connector has one Male and two Female Connectors and is suitable for multiple indoor and outdoor uses. Versatile design is easy to use, making installation quick and efficient.


Product	Type	Option
SS	TC	W
SS Soft Strip and Flex Neon	TC T-Connector	W Wet Location

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


VERGE CEILING TRUCOLOR™ RGB & TUNABLE WHITE 24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL

INSTALLATION

REV 04.29.24

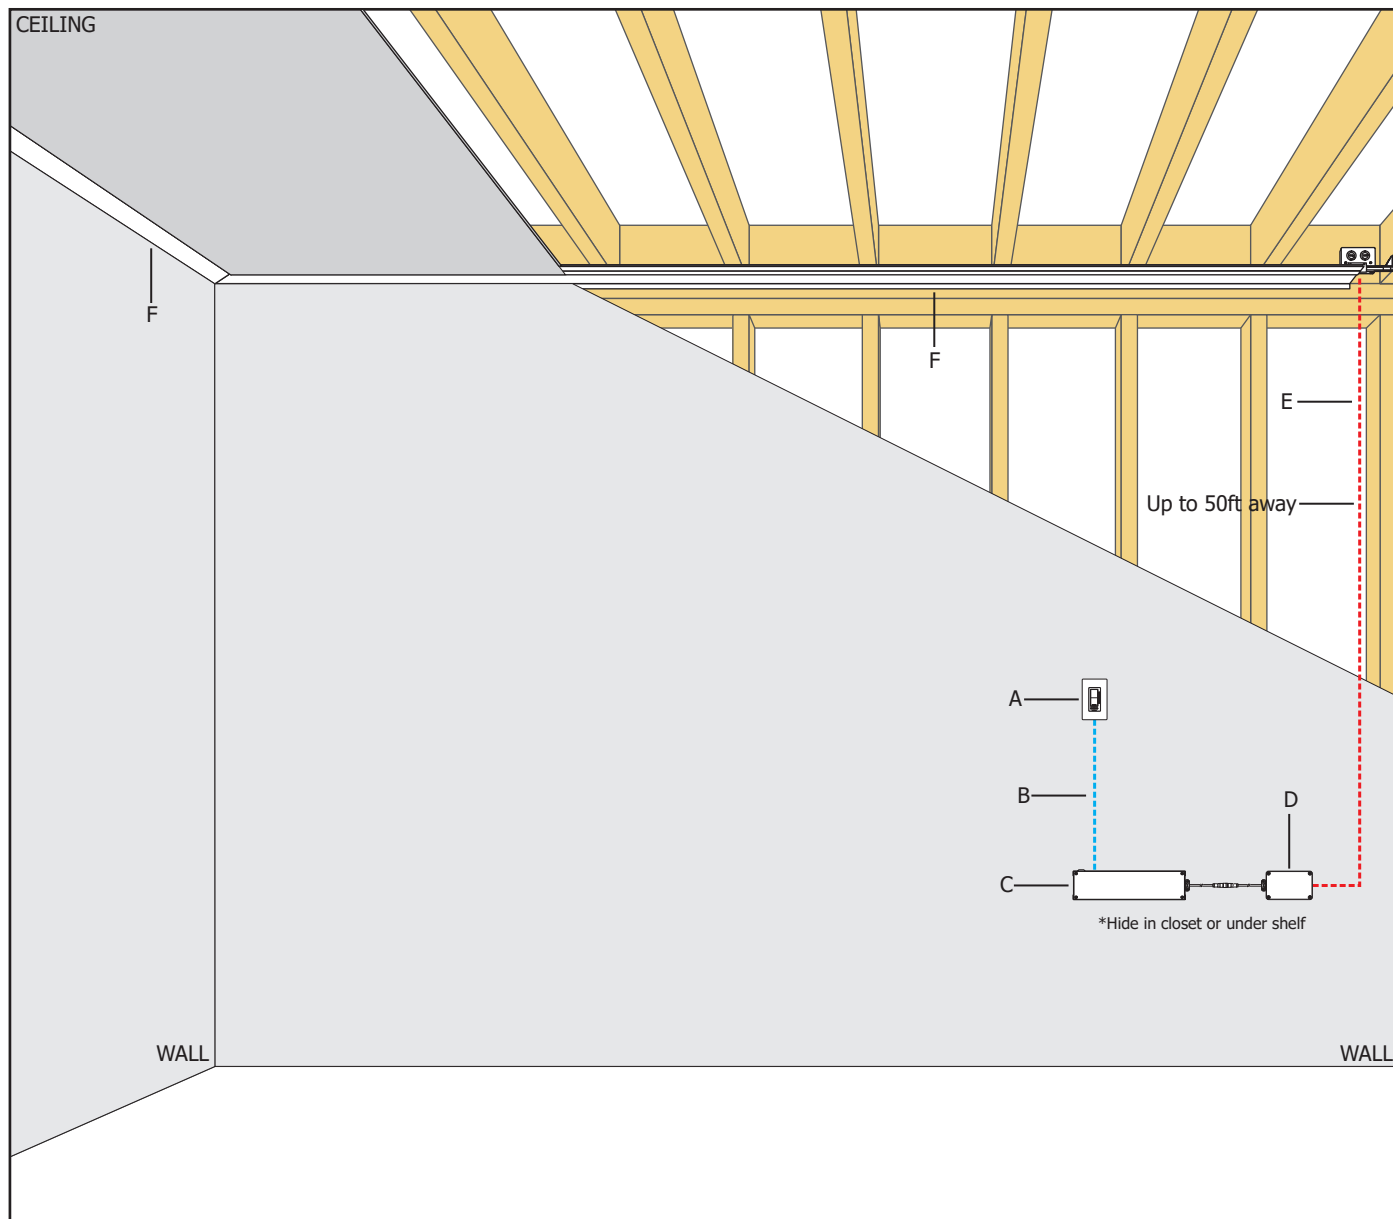

- A. PURE SMART WALL CONTROLLER 120 OR BATTERY**
- B. 120V OPTIONAL**
- C. 120-277VAC CLASS 2 POWER SUPPLY***
- D. PURE SMART WIZ CONTROLLED BRIDGEBOX***
- E. 6 CONDUCTOR CABLE TO JUNCTION BOX**
- F. VERGE CEILING**

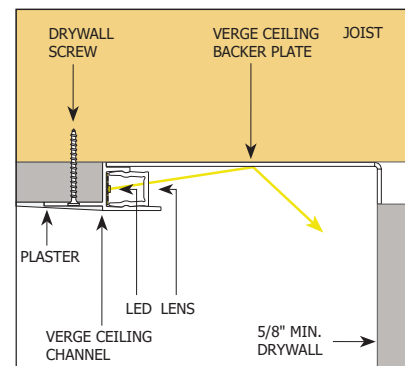


 Direction of Light

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

VERGE CEILING TRUCOLOR™ RGB & TUNABLE WHITE

24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL

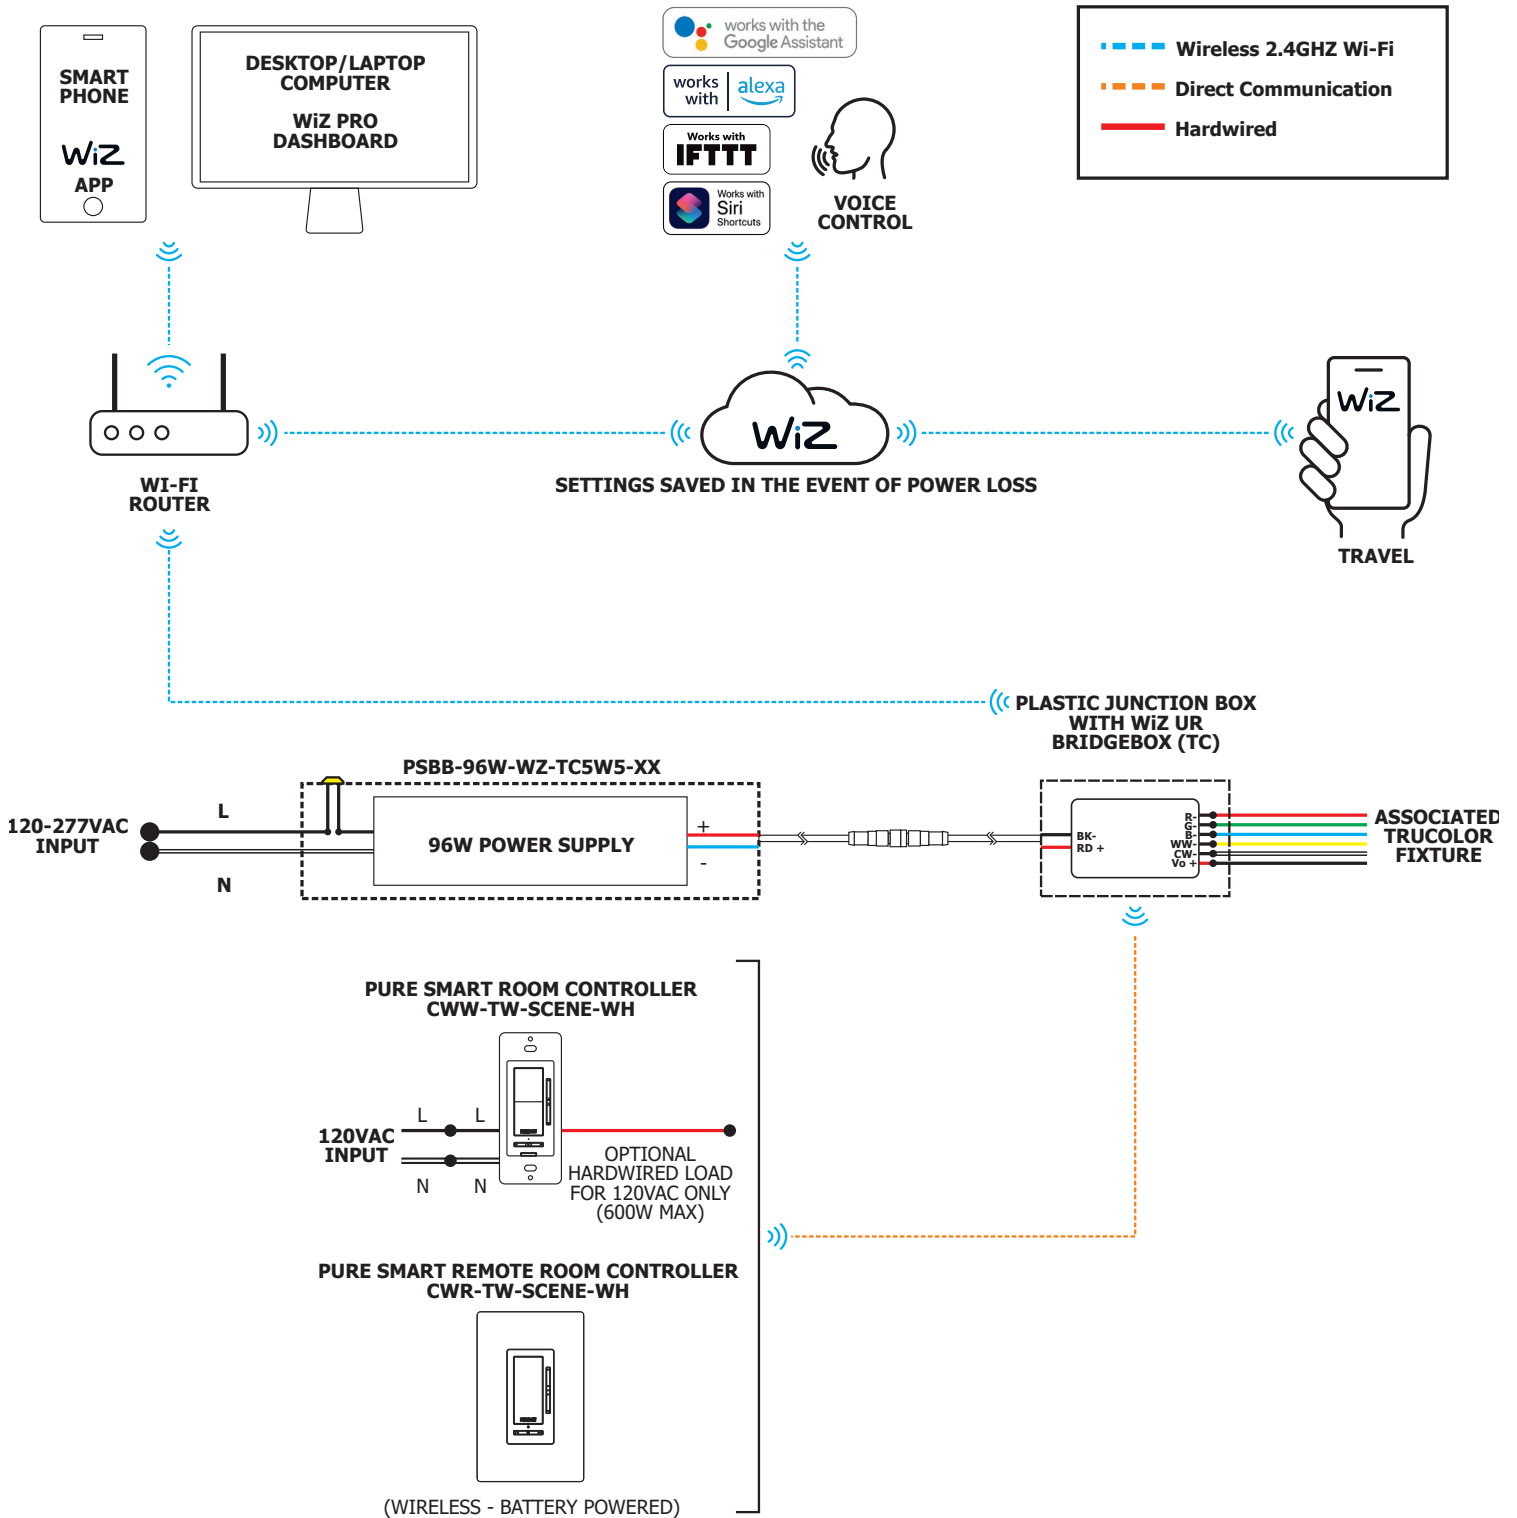

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


TM30 DATA

24VDC 5/8" DRYWALL PLASTER-IN LED SYSTEM, 5 CHANNEL CONTROL


REV 04.29.24

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

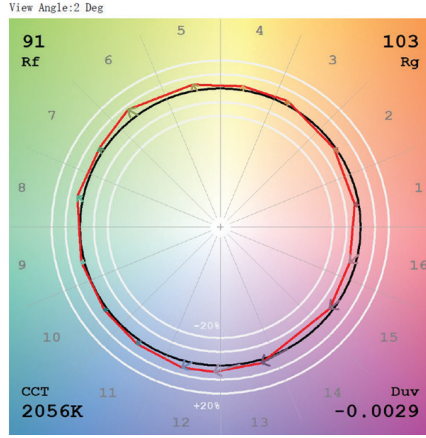


2200K (TruColor™ RGBTW)

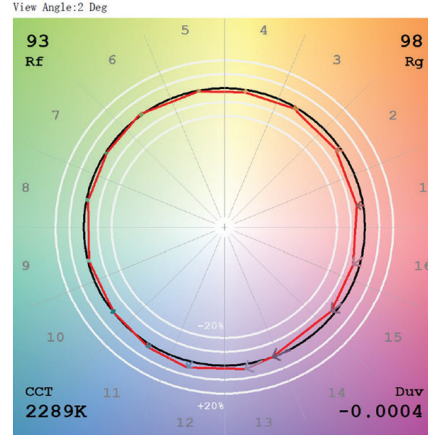


2400K (TruColor™ RGBTW)

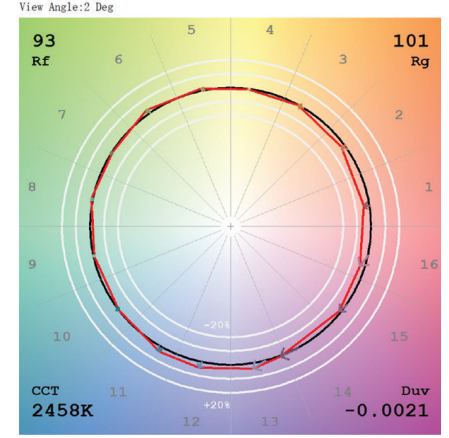


2700K (TruColor™ RGBTW)

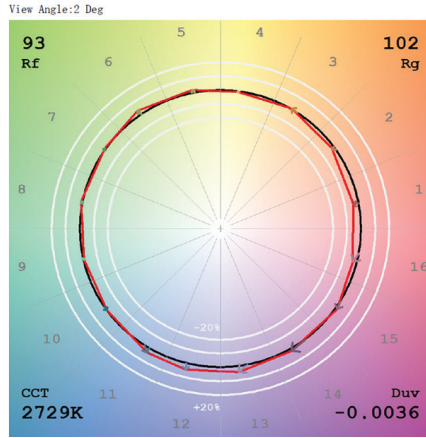


3000K (TruColor™ RGBTW)

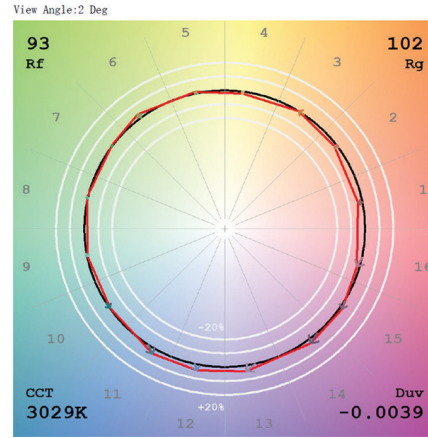


3500K (TruColor™ RGBTW)

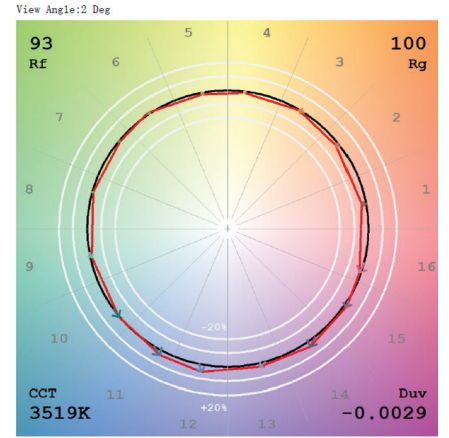


4000K (TruColor™ RGBTW)

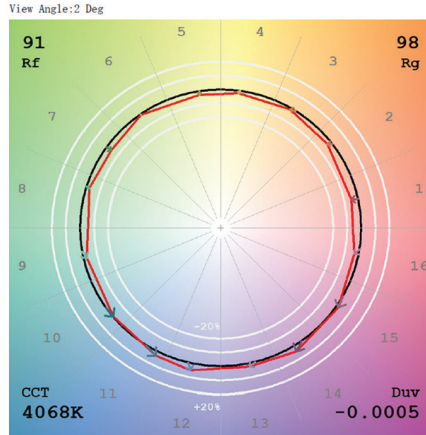

5700K (TruColor™ RGBTW)

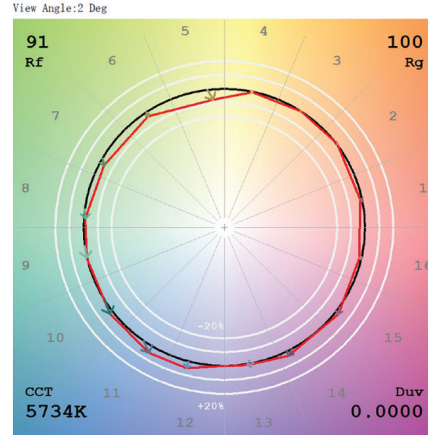

6500K (TruColor™ RGBTW)

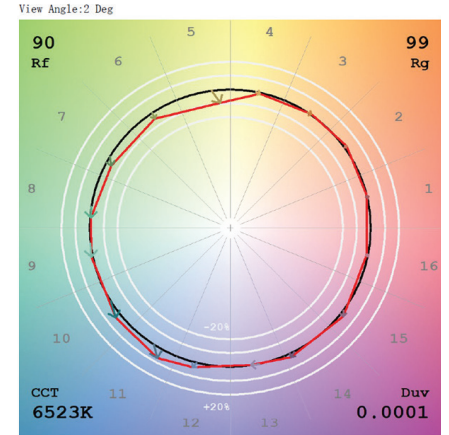

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--