



Patent Pending



SINGLE FEED
MAGNETIC



M2T-2x150-12-SN shown



M2T-2x150-12-P-SN shown

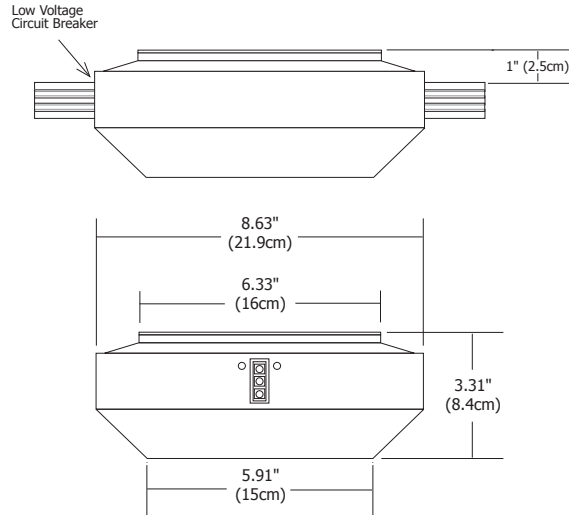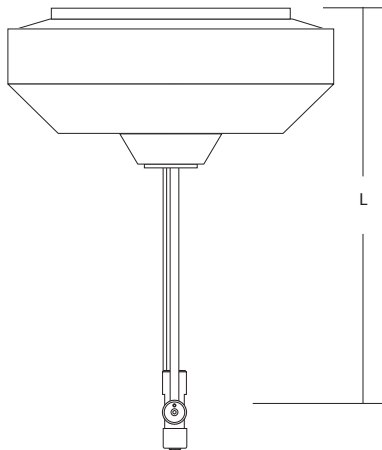

Surface Mount 2x150 Watt Magnetic Transformer

Monorail 2 Circuit surface mount 2x150 watt magnetic transformer converts line voltage to 12 volts. The decorative transformer mounts to a standard 4" square electrical box with round plaster ring or octagon electrical box (not included).

Dimming:

With 2 low voltage 300 watt magnetic dimmers

General Requirements:

1" Standoff is used with the surface mount transformer when it is not extended. Use the proper standoff size when extending surface mount transformer. Extendable 12" to 96" (30.5- 243.8cm).

Transformer:

Maximum 150 watt, 12 volt load per circuit

Finish:

Satin Nickel, Polished Nickel or Antique Bronze

Weight:

14 lb (6.35 kg)

System	Power Type	Output Type	Finish	Input Type
M2T	2x150	12	SN	Standard 120 Volt (leave blank)
<small>M2T Monorail 2 Circuit Surface Mount Magnetic Transformer</small>	<small>2x150 2x150 Watt</small>	<small>12 12 Volt</small>	<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze</small>	<small>2 230 Volt</small>

System	Power Type	Output Type	Length (L)	Finish	Input Type
M2T	2x150	12	P12	SN	Standard 120 Volt (leave blank)
<small>M2T Monorail 2 Circuit Surface Mount Magnetic Transformer</small>	<small>2x150 2x150 Watt</small>	<small>12 12 Volt</small>	<small>P12 12" (30.5cm) P24 24" (61cm) P36 36" (91.4cm) P48 48" (122cm) P96 96" (243.8cm) P_ Custom Length</small>	<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze</small>	<small>2 230 Volt</small>

PROJECT:

FIXTURE
TYPE:

DATE: