

# 150W/12V SURFACE MOUNT MAGNETIC TRANSFORMER




Patent Pending


**MONORAIL** 12V  
150W  
SINGLE FEED  
MAGNETIC



MT-150-12-SN shown

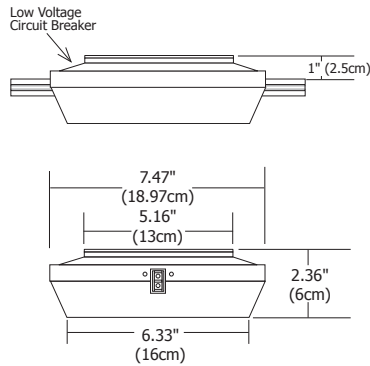

MT-150-12-P12-SN shown

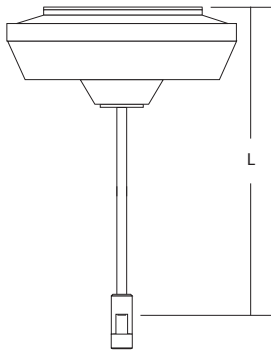

## Single-Feed Surface Mount 150 Watt Magnetic Transformer

Monorail single-feed surface mount 150 watt magnetic transformer converts line voltage to 12 volts. The decorative transformer mounts to a standard 4" square electrical box with round plaster ring or octagon electrical box (not included). Standard side feeding transformer allows Monorail to be mounted 1" from the ceiling. Extended rigid stem, field cuttable versions available up to 96". Protected by fast acting 12 volt circuit breaker.

### Dimming:

With 450 watt low voltage magnetic dimmer

### General Requirements:

1" Standoff is used with the surface mount transformer when it is not extended. Use the proper standoff size when extending surface mount transformer. Extendable 6" to 96" (15.2cm-243.8cm).

### Transformer:

Maximum 150 watt, 12 volt load

### Finish:

Satin Nickel, Polished Nickel or Antique Bronze

### Weight:

7 lb (3.2 kg)

System	Power Type	Output Type	Finish	Input Type
<b>MT</b>	<b>150</b>	<b>12</b>	<b>SN</b>	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	150 150 Watt	12 12 Volt Single Feed	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt

System	Power Type	Output Type	Length	Finish	Input Type
<b>MT</b>	<b>150</b>	<b>12</b>	<b>P6</b>	<b>SN</b>	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	150 150 Watt	12 12 Volt Single Feed	P6 6" (15.2cm) P12 12" (30.5cm) P24 24" (61cm) P36 36" (91.4cm) P48 48" (122cm) P96 96" (243.8cm) P_ Custom Length	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt

PROJECT:

FIXTURE  
TYPE:

DATE: