




**MP-4RD-SL2-SN**  
Monorail 4" Round Power Feed  
Canopy shown.

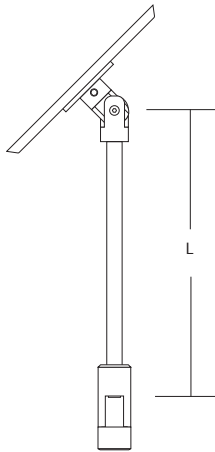

### Sloped Ceiling Monorail Power Feed Canopies

Monorail 4" Round power feed canopy with sloped ceiling adapter. Mounts on standard 4" electrical box with plastic ring or octagon electrical box. Field cuttable rigid stem(s) with sloped ceiling adapter(s). Monorail Dual Power Feed includes isolating connectors to isolate the two power feeds from each other. Satin nickel, polished nickel or antique bronze finish.

Must be used with corresponding Edge Lighting Sloped Ceiling Standoffs. Dimmable with low voltage magnetic dimmer.

#### Weight:

.55 lb (.25 kg)


System	Type	Slope Length (L)	Finish
<b>MP</b>	<b>4RD</b>	<b>SL2</b>	<b>SN</b>
<b>MP</b> Monorail Power Feed <b>MPD</b> Monorail Dual Power Feed	<b>4RD</b> 4.3" (10.9cm) Round	<b>SL2</b> 2" (5.1cm) <b>SL6</b> 6" (15.2cm) <b>SL12</b> 12" (30.5cm) <b>SL24</b> 24" (61cm) <b>SL36</b> 36" (91.4cm) <b>SL48</b> 48" (122cm) <b>SL96</b> 96" (243.8cm) <b>SL_</b> Custom Length	<b>SN</b> Satin Nickel <b>PN</b> Polished Nickel <b>BZ</b> Antique Bronze



**MPD-4RD-SL2-SN**  
Monorail 4" Round Dual Power Feed Canopy shown.



**MT-600-D12-SL2-SN**  
Monorail 600 Watt 12 Volt Dual Feed  
Surface Transformer shown.

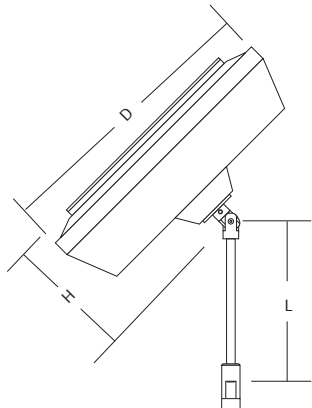

### Sloped Ceiling Surface Mount Transformers

Monorail surface mount magnetic transformer with integral dimming coil. Field cuttable rigid stem(s) with sloped ceiling adapter. Monorail Dual Power Feed includes isolating connectors to isolate the two power feeds from each other. Satin nickel, polished nickel or antique bronze finish.

Must be used with corresponding Edge Lighting Sloped Ceiling Standoffs. Dimmable with low voltage magnetic dimmer.

#### Dimensions:

MT-150: 7.47" Diameter x 4" H  
MT-300: 8.62" Diameter x 4.4" H  
MT-600: 10.13" Diameter x 4.7" H

#### Weight:

MT-150: 7 lb (3 kg)  
MT-300: 12 lb (5 kg)  
MT-600: 20 lb (9 kg)

System	Power Type	Voltage Output	Slope Length (L)	Finish	Input Type
<b>MT</b>	<b>150</b>	<b>12</b>	<b>SL12</b>	<b>SN</b>	Standard 120 Volt (leave blank)
<b>MT</b> Monorail Surface Transformer	<b>150</b> 150 Watt <b>300</b> 300 Watt <b>600</b> 600 Watt	<b>12</b> 12 Volt Single Feed <b>24</b> 24 Volt Single Feed <b>D12</b> 12 Volt Dual Feed (600 Watt Only)	<b>SL2</b> 2" (5.1cm) <b>SL6</b> 6" (15.2cm) <b>SL12</b> 12" (30.5cm) <b>SL24</b> 24" (61cm) <b>SL36</b> 36" (91.4cm) <b>SL48</b> 48" (122cm) <b>SL96</b> 96" (243.8cm) <b>SL_</b> Custom Length	<b>SN</b> Satin Nickel <b>PN</b> Polished Nickel <b>BZ</b> Antique Bronze	<b>2</b> 230 Volt <b>3</b> 277 Volt <b>P</b> Plug

PROJECT:

FIXTURE  
TYPE:

DATE: