



600W/24V RECESSED IN WALL TRANSFORMER

MONORAIL 24V
SINGLE FEED 600W

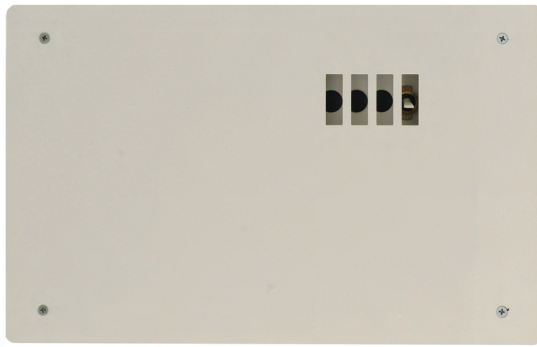

TR-600-24

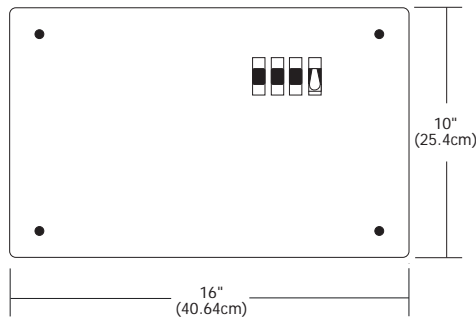

Single-Feed Remote Recessed In Wall Transformer 600W 24V Magnetic

Remote recessed single feed 600 watt magnetic transformer converts line voltage to 24 volt output. Fast acting circuit breaker on the 24 volt side will shut the system off in case of overload or short and can easily be reset. Can be recessed in the wall or surface mounted. Consult Low Voltage Wire Size Chart for proper gauge wire to be used between remote transformer and power feed. Power feed or power feed canopy required, sold separately.

Dimming:

With 1000 watt low voltage magnetic dimmer

Mounting Requirements:


Must be in accessible location

Weight:

25 lb (11.34 kg)

Ordering Code

TR	-	600	-	24	-	Standard 120V (leave blank)
TR Transformer Recessed		600 600 Watt		24 24 Volt		2 230V 50Hz 3 277V 60Hz P Plug-In

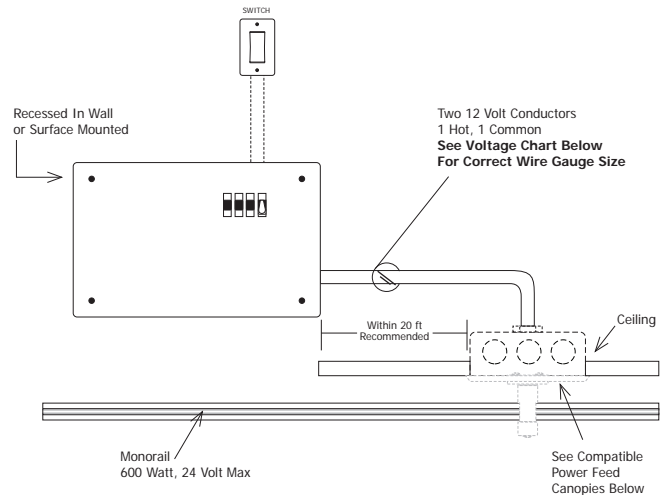



LOW VOLTAGE WIRE SIZE CHART

Use to decide the correct copper wire size for a recommended 3 percent voltage drop. The length shown is the length of wire from the transformer to the power feed canopy/J-Box.

24 Volt	5 ft. (1.5m)	6-15 ft. (1.8-4.6m)	16-20 ft. (4.9-6.1m)	21-40 ft. (6.4-12.2m)
600 Watt	#12 GA	#8 GA	#6 GA	#4 GA

Compatible Power Feed Canopies





MP

Monorail Power Feed

4RD


4" Round Canopy


1

1" (2.5cm)
6" (15.2)
12" (30.5cm)
24" (61cm)
36" (91.4cm)
48" (122cm)
96" (243.8cm)

SN

Satin Nickel
PN Polished Nickel
BZ Antique Bronze





MP

Monorail Power Feed

4RD


4" Round Canopy


A

12" (3.7m)
Adjustable Cable

SN

Satin Nickel
PN Polished Nickel
BZ Antique Bronze





MP

Monorail Power Feed

4RD


4" Round Canopy


FE

Feed End Wall

SN

Satin Nickel
PN Polished Nickel
BZ Antique Bronze





MP

Monorail Power Feed

4RD


4" Round Canopy


ME

Adjustable Monorail Feed End

SN

Satin Nickel
PN Polished Nickel
BZ Antique Bronze





MP

Monorail Power Feed

2SQ


2" Square Canopy
J-Box Included


1

1" (2.5cm)

SN

Satin Nickel
PN Polished Nickel
BZ Antique Bronze





MP

Monorail Power Feed

2SQ

2" Square Canopy
J-Box Included

FE

Feed End Wall

SN

Satin Nickel
PN Polished Nickel
BZ Antique Bronze

PROJECT:

FIXTURE
TYPE:

DATE: