

STEP



Description: Step wall recessed fixture is perfect for stairs or walls. Scoop reflector and body in satin aluminum finish. Step KIT includes Step, new construction housing, plaster screen, electronic transformer and Ministar® 10 watt 12 volt G4 bipin base halogen JC lamp. The Ministar® integrated reflector improves efficiency by focusing the light, as well as reducing operating temperature; light output is equal to a standard 20 watt bipin lamp. Step 4KIT contains 4 complete fixtures packaged together. General downward light distribution.

Body Finish: Satin Aluminum






Lamp: **HALOGEN (H)**
H1 - JC-MS/G4/10W/12V

Total Wattage: H1 - 10W

Dimmer: Low voltage electronic

Dimensions: W 3.125" x H 3.125" x D 1.25"
W 8cm x H 8cm x D 3cm

Weight: 1 lb (0.5 kg)

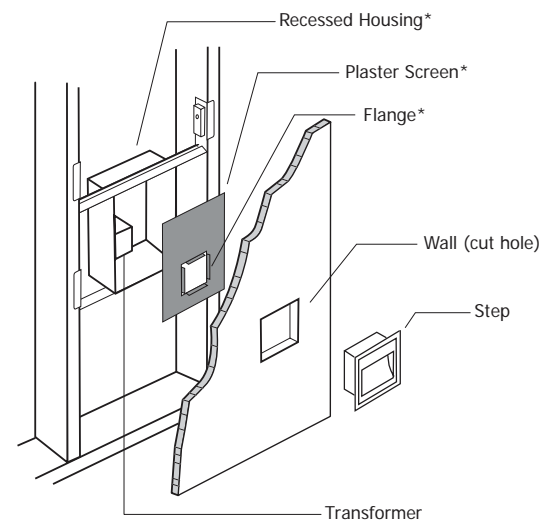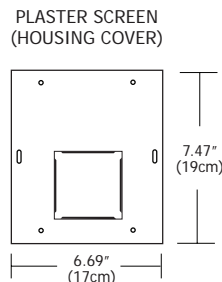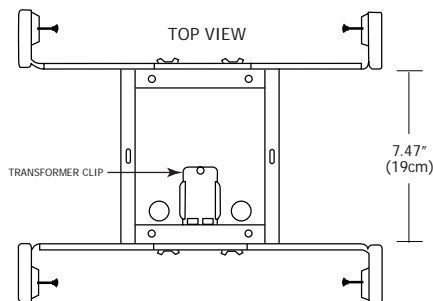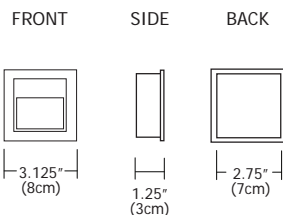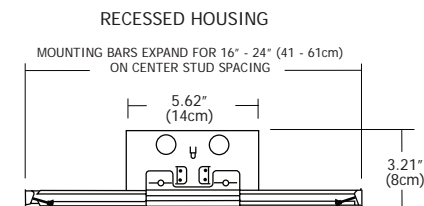

*not used when installing in furniture, stairs, or mirrors

Ordering Code	Description	Lamp	Voltage
STEP	KIT	H1	Standard 120V (leave blank)
	-KIT - Housing & Fixture -4KIT - 4 Fixture Pack	-H1 - Halogen	-2 - 230V 50Hz -3 - 277V 60Hz

COMPANY:	FIXTURE TYPE:	DATE:
PROJECT:	CONSULTANT:	APPROVED BY: