




1718 W. Fullerton Chicago, IL 60614
 Ph: 773.770.1195 • Fax: 773.935.5613
 www.PureEdgeLighting.com • info@PureEdgeLighting.com
 © 2016 PureEdge Lighting. All Rights Reserved.

Installation Instructions for 90° Mounting Bracket for Cirrus Mounting Clips C-MCL-90


IMPORTANT INFORMATION

- This instruction shows a typical installation.
- This product should be used with Cirrus channel series.

SAVE THESE INSTRUCTIONS!





Section One: Install the Cirrus Mounting Clip

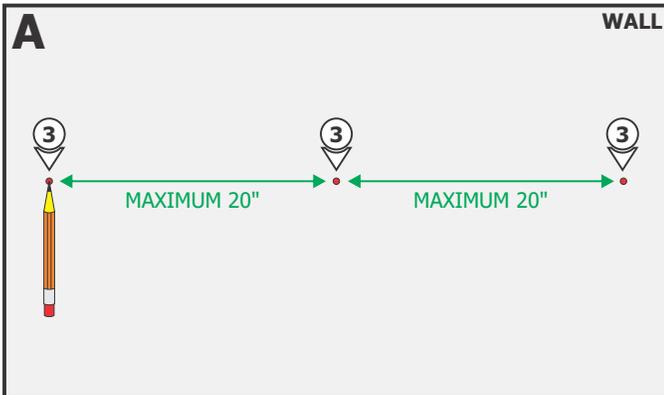


- 1:** Determine how many mounting clips are included with the Cirrus product. Note that the number of mounting clips vary based on the channel length.
- 2:** Determine the location on the wall that the channel is going to be mounted.
- 3:** Based on the number of mounting clips provided with the fixture, mark points for each mounting bracket in a straight line evenly distributed for maximum 20" apart.


- NOTE:** Steps 4 and 5 are for drywall mounting. Omit these steps if mounting to a wood surface directly.
- 4:** Tap the anchors onto the marked points up to the threaded portion with a hammer.
 - 5:** Screw in the threaded portion with a Phillips screw driver.

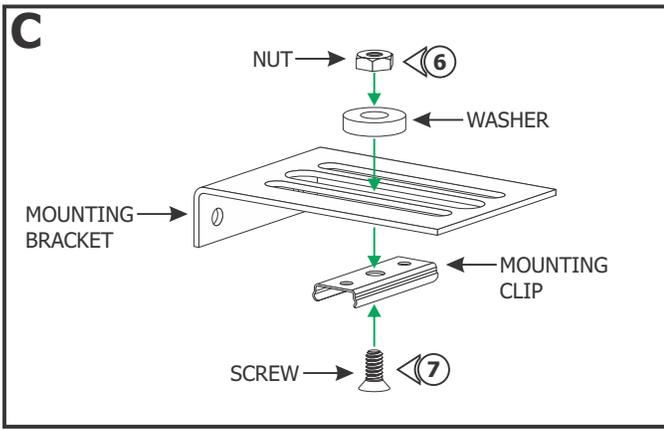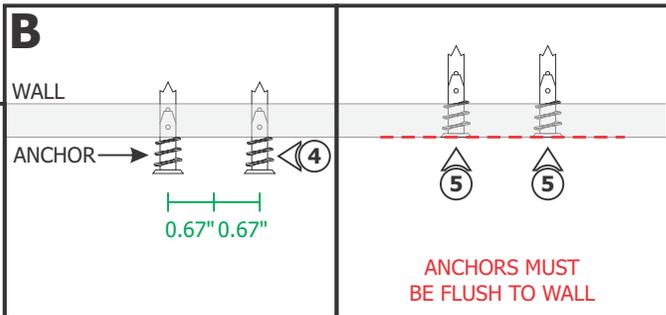


- NOTE:** Install one 90° mounting bracket for each mounting clip provided with the Cirrus channel.
- 6:** Place the nut, washer and mounting bracket over the mounting clip.
 - 7:** Insert and tighten the #6-32 screw through the center of the mounting clip, mounting bracket, washer and nut.

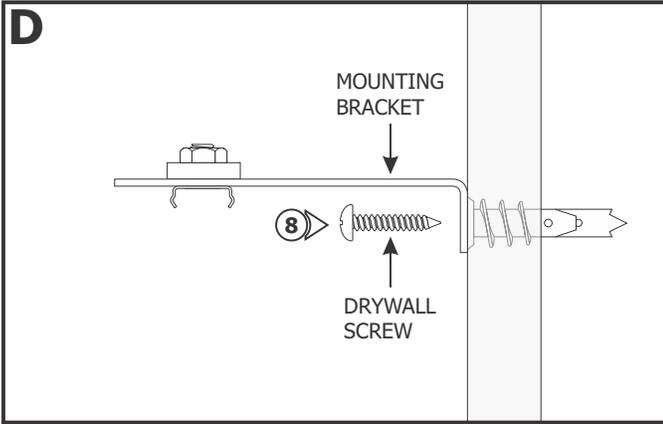

8: Install the assembled brackets to the drywall anchors with the provided drywall screws.

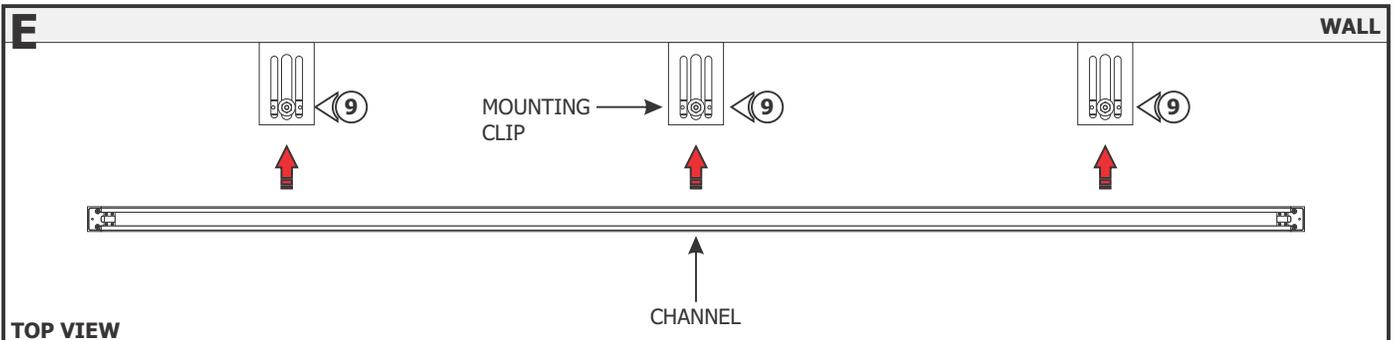

TOP VIEW

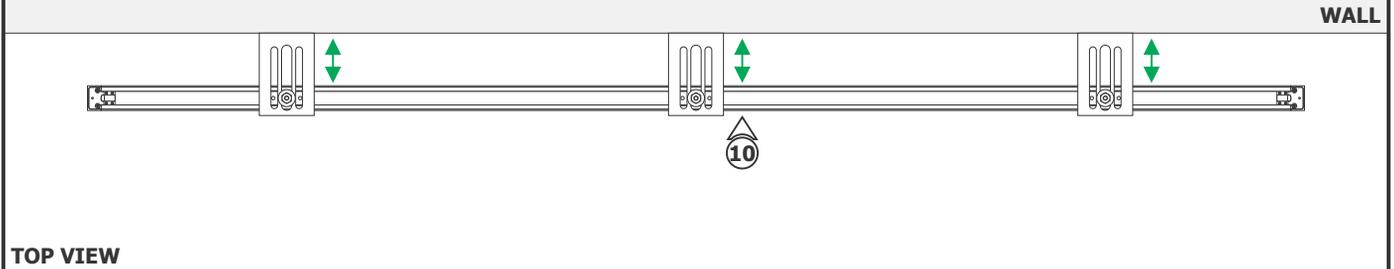

TOP VIEW

9: Align the channel with the mounting clips. Carefully snap the channel onto the mounting clips.

10: The channel can be adjusted towards or away from the wall up to 2".