


1718 W. Fullerton Ave Chicago, IL 60614 Tel: 773-770-1195 Fax: 773-935-5613 www.edgelighting.com info@edgelighting.com LCM-MCL-075

## Installation Instructions for Light Channel 75° Mounting Clip


## **IMPORTANT INFORMATION**

- This product should be used with DIY and Complete Light Channel fixtures.

## **SAVE THESE INSTRUCTIONS!**





## **Install the Mounting Clip**

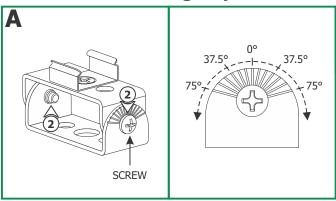

**3:** Place the mounting clips on the surface every 1' (measure from the the center of the mounting clip) and mark the screw locations.


- 1: Determine the location of the Light Channel.
- **2:** Slightly loosen the Phillips screws on the sides of the mounting clip so that the clip rotates easily.

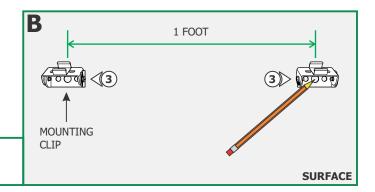

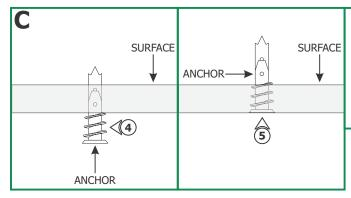

**NOTE:** Steps 4 through 6 are for drywall mounting. Omit these steps if mounting the clips to a wood surface directly.

- **4:** Tap the anchors onto the marked points up to the threaded portion with a hammer.
- **5:** Screw in the threaded portion of the anchors with a Phillips screwdriver.

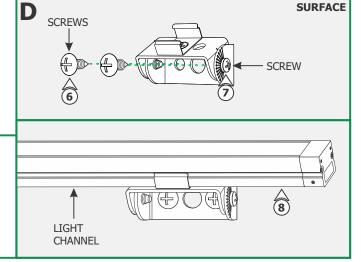

- **6:** Line up the mounting clips to the anchors and secure it to the anchors by tightening the two screws.
- **7:** Set the angle on the mounting clip in which the Light Channel will be installed in (refer to Drawing A), and tighten Phillips screws on the sides to lock it in place.
- 8: Carefully snap the Light Channel onto the mounting clips.