



# ZIPP WAVE DYNAMIC TUNABLE WHITE

## LED SUSPENSION DOWNLIGHT WITH REMOTE POWER - END FEED



DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 02.23.22



Five (5) Zipp Waves are shown here

### DESCRIPTION

Add curves and volume to any space with the Zipp Wave Suspension Downlight. This contemporary, curvy, linear LED fixture offers lighting that is crisp and spot-free. It is available in a range of increments from 48" to 240" (20'), a 100° beam spread, optional adjustable white or black louver, multiple finishes, and Dynamic Tunable White (**2K6K**). Fixture includes a 5-year pro-rated warranty. For custom designs and quotes, send drawings to [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).

### INSTALLATION

- Mounts to a standard junction box, pre-wired from either a 120V with a 60 watt NON-IC (50W-IC) power supply that fits in the ceiling electrical junction box, or from a remote power supply feeding 24VDC up to 100 watts at a maximum of 40ft away
- Includes your choice of one or two canopies: one for remote power (under 60 watts NON-IC, fits in Jbox), one blank at end cap - 2R2, 2S2, 4R2, 4S2
- Includes adjustable 12' coaxial and aircraft cables (additional aircraft cables included for support when fixture exceeds 96")
- Power supplies sold separately

### FINISHES



Satin Black  
**BK**

Chrome  
**CH**

Satin Nickel  
**SN**

White  
**WH**

### LENSES

- Available in a 100° white diffused lens
- Optional Black or White louver available

### LAMPING

- Dynamic Tunable White: 2000K-4000K
- 50,000 Hour Lamp Life

### REMOTE POWER SUPPLIES\* & DIMMERS (SOLD SEPARATELY)

24VDC, Class 2 wiring

#### Static White & Warm Dim

- UNI Driver: Universal Dimming (TRIAC, ELV, 0-10V)**
- Electronic Low Voltage (ELV)<sup>†</sup>** 50W IC or 60W Non-IC (fits inside junction box)

#### Lutron

- Lutron** Hi-Lume/Ecosystem

#### Tunable White


- 0-10V:** Requires two dimmers, one for intensity and one for color temperature
- DMX Dynamic Color Changing:** Must be used with PureEdge [Controllers](#)

\*In-Wall Mounting and drop ceiling kits available for select power supplies


<sup>†</sup>ELV power supplies are not compatible with nlight, use only Universal power supplies

### APPLICATIONS

Designed for indoor use only. Ideal application environments include: restaurants, hallways, conference rooms, kitchens, dining rooms, architectural lighting, general lighting, and retail



Channel Without Louver  
(Actual Size)



Channel With Louver  
(Actual Size)


| System                                                           | Wattage<br>Per Foot | Canopy                            | Nominal Size (Inches)                                                                                                     | Color Temperature                     | Finish                 |
|------------------------------------------------------------------|---------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------------|
| <b>WSD</b>                                                       | <b>5W</b>           | <b>2R</b>                         | <b>240</b>                                                                                                                | <b>2K6K</b>                           | <b>SN</b>              |
| <b>WSD</b> Zipp Wave Suspension Diffused Lens with Remote Power  | <b>5W</b> 4.6 Watt  | <b>2R</b> 2.8" Round Canopy       | <b>48-240</b> Order in various increments from 48" to 240" at 5 watts per foot. Maximum shipping length for Chrome is 84" | <b>2K6K</b> 2000K-6500K Tunable White | <b>BK</b> Satin Black  |
| <b>WSDW</b> Zipp Wave Suspension Diffused Lens with White Louver |                     | <b>2S</b> 2.8" Square Canopy      |                                                                                                                           |                                       | <b>CH</b> Chrome       |
| <b>WSDB</b> Zipp Wave Suspension Diffused Lens with Black Louver |                     | <b>4R</b> 4.6" Round Canopy       |                                                                                                                           |                                       | <b>SN</b> Satin Nickel |
|                                                                  |                     | <b>4S</b> 4.6" Square Canopy      |                                                                                                                           |                                       | <b>WH</b> White        |
|                                                                  |                     | <b>2R2</b> 2x2.8" Round Canopies  |                                                                                                                           |                                       |                        |
|                                                                  |                     | <b>2S2</b> 2x2.8" Square Canopies |                                                                                                                           |                                       |                        |
|                                                                  |                     | <b>4R2</b> 2x4.6" Round Canopies  |                                                                                                                           |                                       |                        |
|                                                                  |                     | <b>4S2</b> 2x4.6" Square Canopies |                                                                                                                           |                                       |                        |

\*See length chart on pg 2 for exact dimensions

| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|
|---------|--------------|------|

# ZIPP WAVE DYNAMIC TUNABLE WHITE


## LED SUSPENSION DOWNLIGHT WITH REMOTE POWER - END FEED

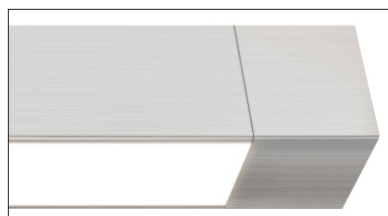

DIFFUSED WHITE LENS



DIFFUSED WHITE LENS WITH WHITE LOUVER

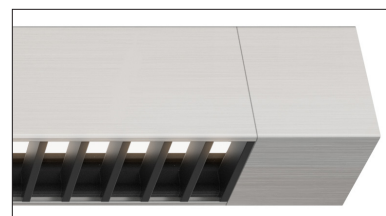

CLEAR FROSTED LENS WITH BLACK LOUVER


### Lamp Data: Lamp data for Zipp Wave Suspension Downlight with Remote - End Feed

| WSD                     |                                             |     |     |     |     |     |     |
|-------------------------|---------------------------------------------|-----|-----|-----|-----|-----|-----|
| DESCRIPTION             | 100 Degree Diffused White Lens without Lens |     |     |     |     |     |     |
| WATTS PER FOOT          | 5W (4.6 watts)                              |     |     |     |     |     |     |
| COLOR TEMPERATURE       | 20K                                         | 22K | 24K | 27K | 30K | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 185                                         | 225 | 239 | 252 | 264 | 277 | 252 |
| LUMENS PER WATT (lm/w)  | 46                                          | 49  | 52  | 55  | 57  | 60  | 63  |
| CRI                     | 85                                          | 85+ | 90+ | 95+ | 95+ | 85+ | 84  |


| WSDW                    |                                                  |     |     |     |     |     |     |
|-------------------------|--------------------------------------------------|-----|-----|-----|-----|-----|-----|
| DESCRIPTION             | 100 Degree Diffused White Lens with White Louver |     |     |     |     |     |     |
| WATTS PER FOOT          | 5W (4.6 watts)                                   |     |     |     |     |     |     |
| COLOR TEMPERATURE       | 20K                                              | 22K | 24K | 27K | 30K | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 115                                              | 141 | 149 | 157 | 165 | 173 | 157 |
| LUMENS PER WATT (lm/w)  | 29                                               | 31  | 32  | 34  | 36  | 38  | 39  |
| CRI                     | 85                                               | 85+ | 90+ | 95+ | 95+ | 85+ | 84  |

| WSDB                    |                                                  |     |     |     |     |     |     |
|-------------------------|--------------------------------------------------|-----|-----|-----|-----|-----|-----|
| DESCRIPTION             | 100 Degree Diffused White Lens with Black Louver |     |     |     |     |     |     |
| WATTS PER FOOT          | 5W (4.6 watts)                                   |     |     |     |     |     |     |
| COLOR TEMPERATURE       | 20K                                              | 22K | 24K | 27K | 30K | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 72                                               | 87  | 93  | 98  | 103 | 108 | 98  |
| LUMENS PER WATT (lm/w)  | 18                                               | 19  | 20  | 21  | 22  | 23  | 24  |
| CRI                     | 85                                               | 85+ | 90+ | 95+ | 95+ | 85+ | 84  |

| 5W DIFFUSED WHITE |                 |                                |                                |
|-------------------|-----------------|--------------------------------|--------------------------------|
| Distance          | Foot Candles 5W | Beam Width Vert. Spread 101.1° | Beam Width Horiz. Spread 97.4° |
| 1.7ft             | 120fc           | 4.1ft                          | 3.9ft                          |
| 3.3ft             | 39fc            | 8.0ft                          | 7.5ft                          |
| 5.0ft             | 16fc            | 12.1ft                         | 11.4ft                         |
| 6.7ft             | 10fc            | 16.3ft                         | 15.3ft                         |
| 8.3ft             | 6fc             | 20.2ft                         | 18.9ft                         |
| 10.0ft            | 4fc             | 24.3ft                         | 22.8ft                         |

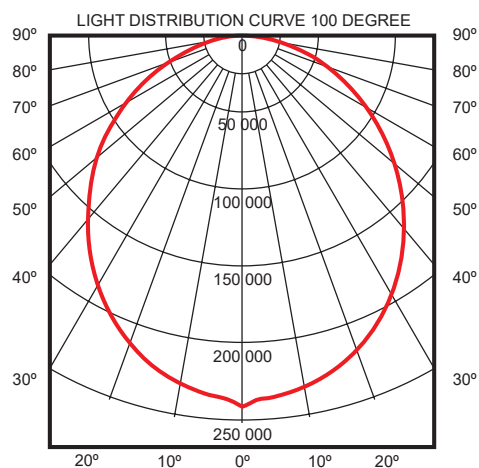

| PROJECT | FIXTURE TYPE |  |  | DATE |
|---------|--------------|--|--|------|
|---------|--------------|--|--|------|



# ZIPP WAVE DYNAMIC TUNABLE WHITE

## LED SUSPENSION DOWNLIGHT WITH REMOTE POWER - END FEED



REV 02.23.22

**Length Chart:** Actual lengths for Zipp Suspension Downlight 2K4K - Remote Power Supply

| ORDERING CODE<br>(NOMINAL SIZE) | 5W (4.6 WATTS)                                                                                                       |             |                     |                                                                                          |                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------|---------------------|------------------------------------------------------------------------------------------|--------------------|
|                                 | WITH TWO DIMMERS: YOU NEED TWO<br>UNI DRIVER POWER SUPPLIES, ONE<br>FOR 2000K AND ONE FOR 4000K<br>(SEE PAGES BELOW) |             |                     | DMX POWER AND CDMX<br>CONTROLLER: YOU NEED ONE<br>POWER SUPPLY ONLY<br>(SEE PAGES BELOW) |                    |
|                                 | 2K<br>WATTS                                                                                                          | 4K<br>WATTS | POWER SUPPLY        | 2K4K DMX<br>WATTAGE                                                                      | POWER SUPPLY       |
| 48                              | 20                                                                                                                   | 20          | PSB-2x40W-UNI-24VDC | 20                                                                                       | PSB-100W-24VDC-2XK |
| 51                              | 21                                                                                                                   | 21          | PSB-2x40W-UNI-24VDC | 21                                                                                       | PSB-100W-24VDC-2XK |
| 53                              | 22                                                                                                                   | 22          | PSB-2x40W-UNI-24VDC | 22                                                                                       | PSB-100W-24VDC-2XK |
| 56                              | 23                                                                                                                   | 23          | PSB-2x40W-UNI-24VDC | 23                                                                                       | PSB-100W-24VDC-2XK |
| 58                              | 24                                                                                                                   | 24          | PSB-2x40W-UNI-24VDC | 24                                                                                       | PSB-100W-24VDC-2XK |
| 60                              | 25                                                                                                                   | 25          | PSB-2x40W-UNI-24VDC | 25                                                                                       | PSB-100W-24VDC-2XK |
| 63                              | 26                                                                                                                   | 26          | PSB-2x40W-UNI-24VDC | 26                                                                                       | PSB-100W-24VDC-2XK |
| 65                              | 27                                                                                                                   | 27          | PSB-2x40W-UNI-24VDC | 27                                                                                       | PSB-100W-24VDC-2XK |
| 68                              | 28                                                                                                                   | 28          | PSB-2x40W-UNI-24VDC | 28                                                                                       | PSB-100W-24VDC-2XK |
| 70                              | 29                                                                                                                   | 29          | PSB-2x40W-UNI-24VDC | 29                                                                                       | PSB-100W-24VDC-2XK |
| 72                              | 30                                                                                                                   | 30          | PSB-2x40W-UNI-24VDC | 30                                                                                       | PSB-100W-24VDC-2XK |
| 75                              | 31                                                                                                                   | 31          | PSB-2x40W-UNI-24VDC | 31                                                                                       | PSB-100W-24VDC-2XK |
| 77                              | 32                                                                                                                   | 32          | PSB-2x40W-UNI-24VDC | 32                                                                                       | PSB-100W-24VDC-2XK |
| 80                              | 33                                                                                                                   | 33          | PSB-2x40W-UNI-24VDC | 33                                                                                       | PSB-100W-24VDC-2XK |
| 82*                             | 34                                                                                                                   | 34          | PSB-2x40W-UNI-24VDC | 34                                                                                       | PSB-100W-24VDC-2XK |
| 84                              | 35                                                                                                                   | 35          | PSB-2x40W-UNI-24VDC | 35                                                                                       | PSB-100W-24VDC-2XK |
| 87                              | 36                                                                                                                   | 36          | PSB-2x40W-UNI-24VDC | 36                                                                                       | PSB-100W-24VDC-2XK |
| 89                              | 37                                                                                                                   | 37          | PSB-2x40W-UNI-24VDC | 37                                                                                       | PSB-100W-24VDC-2XK |
| 92                              | 38                                                                                                                   | 38          | PSB-2x40W-UNI-24VDC | 38                                                                                       | PSB-100W-24VDC-2XK |
| 94                              | 39                                                                                                                   | 39          | PSB-2x40W-UNI-24VDC | 39                                                                                       | PSB-100W-24VDC-2XK |
| 96                              | 40                                                                                                                   | 40          | PSB-2x60W-UNI-24VDC | 40                                                                                       | PSB-100W-24VDC-2XK |
| 99                              | 41                                                                                                                   | 41          | PSB-2x60W-UNI-24VDC | 41                                                                                       | PSB-100W-24VDC-2XK |
| 101                             | 42                                                                                                                   | 42          | PSB-2x60W-UNI-24VDC | 42                                                                                       | PSB-100W-24VDC-2XK |
| 104                             | 43                                                                                                                   | 43          | PSB-2x60W-UNI-24VDC | 43                                                                                       | PSB-100W-24VDC-2XK |
| 106                             | 44                                                                                                                   | 44          | PSB-2x60W-UNI-24VDC | 44                                                                                       | PSB-100W-24VDC-2XK |
| 108                             | 45                                                                                                                   | 45          | PSB-2x60W-UNI-24VDC | 45                                                                                       | PSB-100W-24VDC-2XK |
| 111                             | 46                                                                                                                   | 46          | PSB-2x60W-UNI-24VDC | 46                                                                                       | PSB-100W-24VDC-2XK |
| 113                             | 47                                                                                                                   | 47          | PSB-2x60W-UNI-24VDC | 47                                                                                       | PSB-100W-24VDC-2XK |
| 116                             | 48                                                                                                                   | 48          | PSB-2x60W-UNI-24VDC | 48                                                                                       | PSB-100W-24VDC-2XK |
| 118                             | 49                                                                                                                   | 49          | PSB-2x60W-UNI-24VDC | 49                                                                                       | PSB-100W-24VDC-2XK |
| 120**                           | 50                                                                                                                   | 50          | PSB-2x60W-UNI-24VDC | 50                                                                                       | PSB-100W-24VDC-2XK |
| 123                             | 51                                                                                                                   | 51          | PSB-2x60W-UNI-24VDC | 51                                                                                       | PSB-100W-24VDC-2XK |
| 125                             | 52                                                                                                                   | 52          | PSB-2x60W-UNI-24VDC | 52                                                                                       | PSB-100W-24VDC-2XK |
| 128                             | 53                                                                                                                   | 53          | PSB-2x60W-UNI-24VDC | 53                                                                                       | PSB-100W-24VDC-2XK |
| 130                             | 54                                                                                                                   | 54          | PSB-2x60W-UNI-24VDC | 54                                                                                       | PSB-100W-24VDC-2XK |
| 132                             | 55                                                                                                                   | 55          | PSB-2x60W-UNI-24VDC | 55                                                                                       | PSB-100W-24VDC-2XK |
| 135                             | 56                                                                                                                   | 56          | PSB-2x60W-UNI-24VDC | 56                                                                                       | PSB-100W-24VDC-2XK |
| 137                             | 57                                                                                                                   | 57          | PSB-2x60W-UNI-24VDC | 57                                                                                       | PSB-100W-24VDC-2XK |
| 140                             | 58                                                                                                                   | 58          | PSB-2x60W-UNI-24VDC | 58                                                                                       | PSB-100W-24VDC-2XK |
| 142                             | 59                                                                                                                   | 59          | PSB-2x60W-UNI-24VDC | 59                                                                                       | PSB-100W-24VDC-2XK |
| 144                             | 60                                                                                                                   | 60          | PSB-2x96W-UNI-24VDC | 60                                                                                       | PSB-100W-24VDC-2XK |

\*Maximum Chrome Length \*\*Maximum Shipping Length


| ORDERING CODE<br>(NOMINAL SIZE) | 5W (4.6 WATTS)                                                                                                       |             |                     |                                                                                          |                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------|---------------------|------------------------------------------------------------------------------------------|--------------------|
|                                 | WITH TWO DIMMERS: YOU NEED TWO<br>UNI DRIVER POWER SUPPLIES, ONE<br>FOR 2000K AND ONE FOR 4000K<br>(SEE PAGES BELOW) |             |                     | DMX POWER AND CDMX<br>CONTROLLER: YOU NEED ONE<br>POWER SUPPLY ONLY<br>(SEE PAGES BELOW) |                    |
|                                 | 2K<br>WATTS                                                                                                          | 4K<br>WATTS | POWER SUPPLY        | 2K4K DMX<br>WATTAGE                                                                      | POWER SUPPLY       |
| 147                             | 61                                                                                                                   | 61          | PSB-2x96W-UNI-24VDC | 61                                                                                       | PSB-100W-24VDC-2XK |
| 149                             | 62                                                                                                                   | 62          | PSB-2x96W-UNI-24VDC | 62                                                                                       | PSB-100W-24VDC-2XK |
| 152                             | 63                                                                                                                   | 63          | PSB-2x96W-UNI-24VDC | 63                                                                                       | PSB-100W-24VDC-2XK |
| 154                             | 64                                                                                                                   | 64          | PSB-2x96W-UNI-24VDC | 64                                                                                       | PSB-100W-24VDC-2XK |
| 156                             | 65                                                                                                                   | 65          | PSB-2x96W-UNI-24VDC | 65                                                                                       | PSB-100W-24VDC-2XK |
| 159                             | 66                                                                                                                   | 66          | PSB-2x96W-UNI-24VDC | 66                                                                                       | PSB-100W-24VDC-2XK |
| 161                             | 67                                                                                                                   | 67          | PSB-2x96W-UNI-24VDC | 67                                                                                       | PSB-100W-24VDC-2XK |
| 164                             | 68                                                                                                                   | 68          | PSB-2x96W-UNI-24VDC | 68                                                                                       | PSB-100W-24VDC-2XK |
| 166                             | 69                                                                                                                   | 69          | PSB-2x96W-UNI-24VDC | 69                                                                                       | PSB-100W-24VDC-2XK |
| 168                             | 70                                                                                                                   | 70          | PSB-2x96W-UNI-24VDC | 70                                                                                       | PSB-100W-24VDC-2XK |
| 171                             | 71                                                                                                                   | 71          | PSB-2x96W-UNI-24VDC | 71                                                                                       | PSB-100W-24VDC-2XK |
| 173                             | 72                                                                                                                   | 72          | PSB-2x96W-UNI-24VDC | 72                                                                                       | PSB-100W-24VDC-2XK |
| 176                             | 73                                                                                                                   | 73          | PSB-2x96W-UNI-24VDC | 73                                                                                       | PSB-100W-24VDC-2XK |
| 178                             | 74                                                                                                                   | 74          | PSB-2x96W-UNI-24VDC | 74                                                                                       | PSB-100W-24VDC-2XK |
| 180                             | 75                                                                                                                   | 75          | PSB-2x96W-UNI-24VDC | 75                                                                                       | PSB-100W-24VDC-2XK |
| 183                             | 76                                                                                                                   | 76          | PSB-2x96W-UNI-24VDC | 76                                                                                       | PSB-100W-24VDC-2XK |
| 185                             | 77                                                                                                                   | 77          | PSB-2x96W-UNI-24VDC | 77                                                                                       | PSB-100W-24VDC-2XK |
| 188                             | 78                                                                                                                   | 78          | PSB-2x96W-UNI-24VDC | 78                                                                                       | PSB-100W-24VDC-2XK |
| 190                             | 79                                                                                                                   | 79          | PSB-2x96W-UNI-24VDC | 79                                                                                       | PSB-100W-24VDC-2XK |
| 192                             | 80                                                                                                                   | 80          | PSB-2x96W-UNI-24VDC | 80                                                                                       | PSB-100W-24VDC-2XK |
| 195                             | 81                                                                                                                   | 81          | PSB-2x96W-UNI-24VDC | 81                                                                                       | PSB-100W-24VDC-2XK |
| 197                             | 82                                                                                                                   | 82          | PSB-2x96W-UNI-24VDC | 82                                                                                       | PSB-100W-24VDC-2XK |
| 200                             | 83                                                                                                                   | 83          | PSB-2x96W-UNI-24VDC | 83                                                                                       | PSB-100W-24VDC-2XK |
| 202                             | 84                                                                                                                   | 84          | PSB-2x96W-UNI-24VDC | 84                                                                                       | PSB-100W-24VDC-2XK |
| 204                             | 85                                                                                                                   | 85          | PSB-2x96W-UNI-24VDC | 85                                                                                       | PSB-100W-24VDC-2XK |
| 207                             | 86                                                                                                                   | 86          | PSB-2x96W-UNI-24VDC | 86                                                                                       | PSB-100W-24VDC-2XK |
| 209                             | 87                                                                                                                   | 87          | PSB-2x96W-UNI-24VDC | 87                                                                                       | PSB-100W-24VDC-2XK |
| 212                             | 88                                                                                                                   | 88          | PSB-2x96W-UNI-24VDC | 88                                                                                       | PSB-100W-24VDC-2XK |
| 214                             | 89                                                                                                                   | 89          | PSB-2x96W-UNI-24VDC | 89                                                                                       | PSB-100W-24VDC-2XK |
| 216                             | 90                                                                                                                   | 90          | PSB-2x96W-UNI-24VDC | 90                                                                                       | PSB-100W-24VDC-2XK |
| 219                             | 91                                                                                                                   | 91          | PSB-2x96W-UNI-24VDC | 91                                                                                       | PSB-100W-24VDC-2XK |
| 221                             | 92                                                                                                                   | 92          | PSB-2x96W-UNI-24VDC | 92                                                                                       | PSB-100W-24VDC-2XK |
| 224                             | 93                                                                                                                   | 93          | PSB-2x96W-UNI-24VDC | 93                                                                                       | PSB-100W-24VDC-2XK |
| 226                             | 94                                                                                                                   | 94          | PSB-2x96W-UNI-24VDC | 94                                                                                       | PSB-100W-24VDC-2XK |
| 228                             | 95                                                                                                                   | 95          | PSB-2x96W-UNI-24VDC | 95                                                                                       | PSB-100W-24VDC-2XK |
| 231                             | 96                                                                                                                   | 96          | PSB-2x96W-UNI-24VDC | 96                                                                                       | PSB-100W-24VDC-2XK |
| 233                             | 97                                                                                                                   | 97          | PSB-2x96W-UNI-24VDC | 97                                                                                       | PSB-100W-24VDC-2XK |
| 236                             | 98                                                                                                                   | 98          | PSB-2x96W-UNI-24VDC | 98                                                                                       | PSB-100W-24VDC-2XK |
| 238                             | 99                                                                                                                   | 99          | PSB-2x96W-UNI-24VDC | 99                                                                                       | PSB-100W-24VDC-2XK |
| 240                             | 100                                                                                                                  | 100         | PSB-2x96W-UNI-24VDC | 100                                                                                      | PSB-100W-24VDC-2XK |

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

**COMPONENTS** Swag Bar & Hook, Swag Hook, and T-Bar are compatible with all Power Canopy options and may be required based on lighting design and application


### NEW CONSTRUCTION & REMODEL 2" COVER FOR 4" SQUARE JUNCTION BOX

The New Construction NC2-JBOX Cover is included with the 2" Round and Square Canopies and is not required for the 4" Square Canopies. NC2 New Construction Junction Box Cover mounts to a standard 4" Electrical Box or Octagon Box, converting it to a 2" Plaster Ring for use with the 2R (Round) or 2S (Square) Canopy. The Remodel RM2-JBOX Plaster Plate cover is used with an existing 4" Square Junction Box and standard Round Plaster Ring. The PS-60L-ELV-24VDC (50 Watt IC, 60 Watt Non-IC) will fit inside the NC2 or RM2-JBOX Cover and Electrical Junction Box for a flush look.

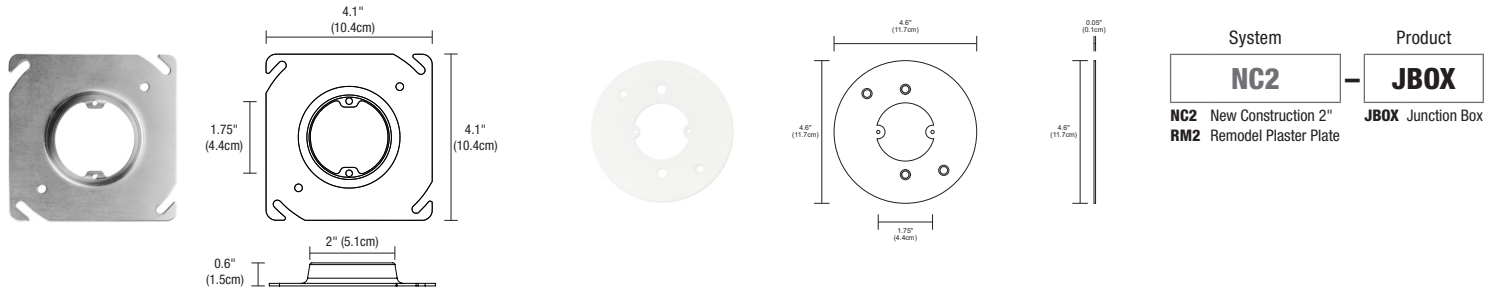


### CIRRUS REMOTE POWER CANOPIES (INCLUDED)

Canopies are included with Canopy ordering code. The 2" Round and Square Canopy includes a special Plaster Ring NC2-JBOX (above). The 4" Square or Round Canopy fits on a standard 4" Electrical Box with Round Plaster Ring and the PS-60L-ELV-24VDC 50 Watt IC, 60 Watt Non-IC) will fit inside the NC2 or RM2-JBOX Cover and Electrical Junction Box for a flush look. Vanishing Point Plaster in system with No Canopy, only see cable going through drywall ceiling with GJ24.

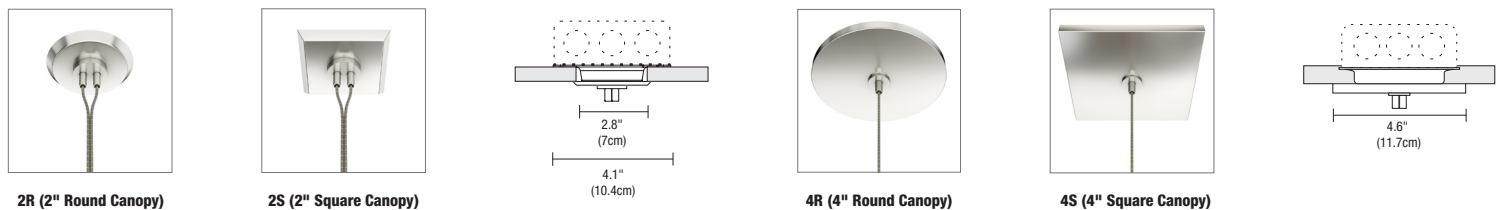


### CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, 2S, 4R and 4S Power Canopies (Canopy not included).

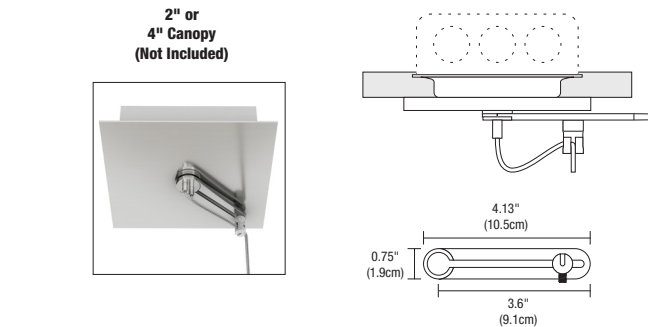


### CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from an electrical box that is not located directly above desired fixture location.

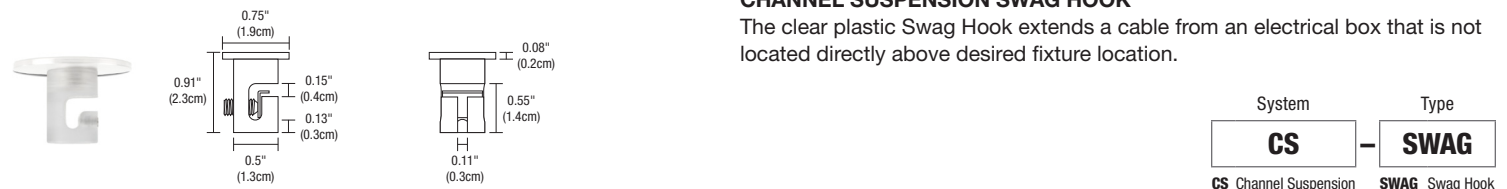

### CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP

Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Available in Satin Nickel Hardware as Adjustable Power and Non-Power versions.








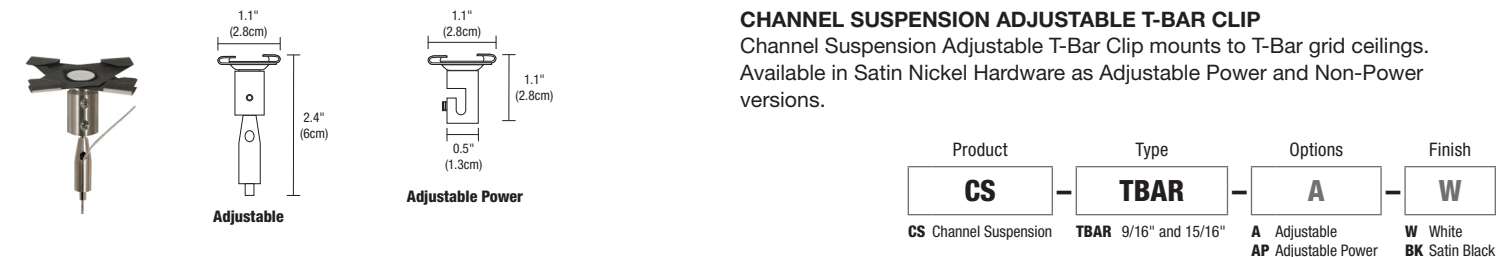


|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# ZIPP WAVE DYNAMIC TUNABLE WHITE

## LED SUSPENSION DOWNLIGHT WITH REMOTE POWER - END FEED

**Drawings:** Drawings are shown with 2" round canopy, 2" square canopy, 4" round canopy, and 4" square canopy

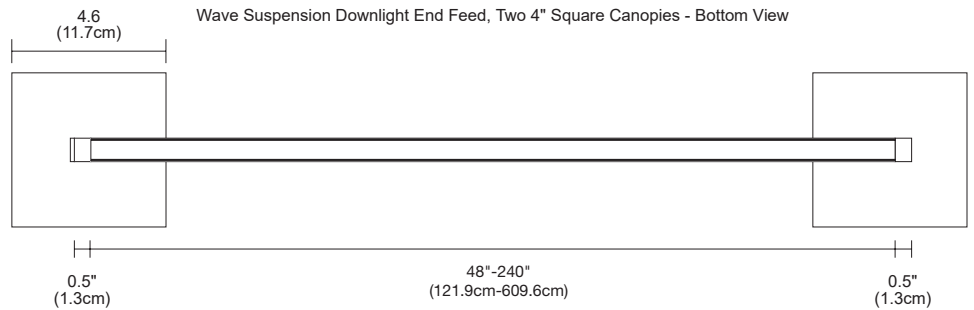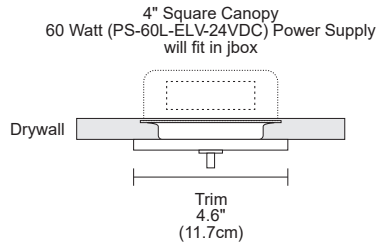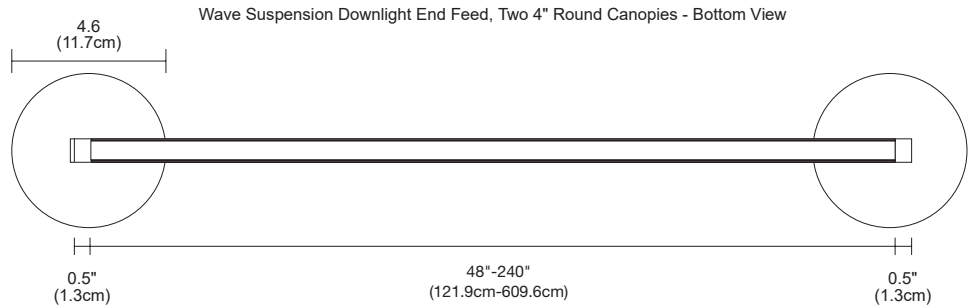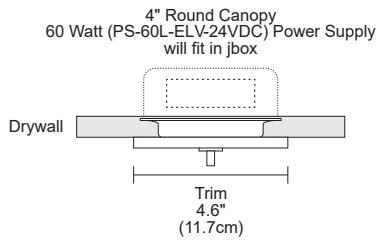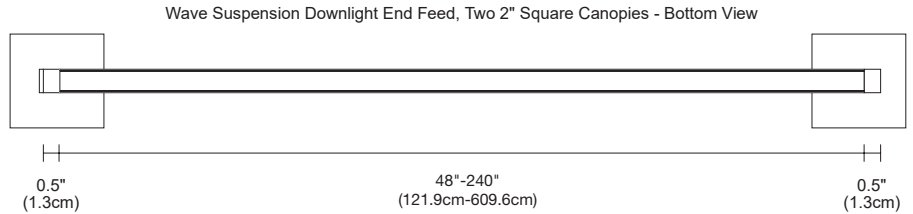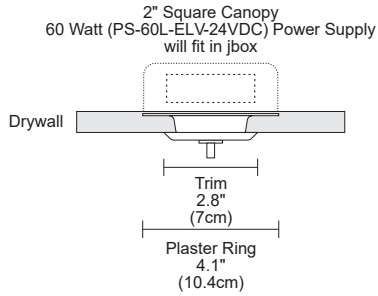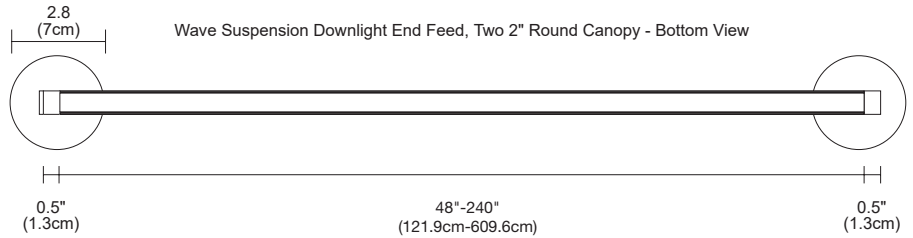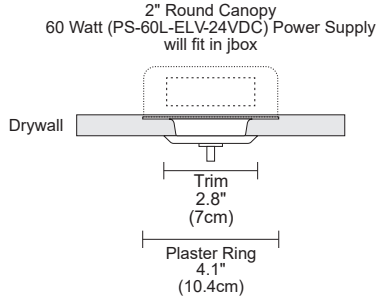


|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# ZIPP WAVE DYNAMIC TUNABLE WHITE


## LED SUSPENSION DOWNLIGHT WITH REMOTE POWER - END FEED

**Drawings:** Side-view shown with 2" or 4" canopy

**Zipp Wave Suspension Downlight with Remote Power 4" Canopy Shown with Louver**

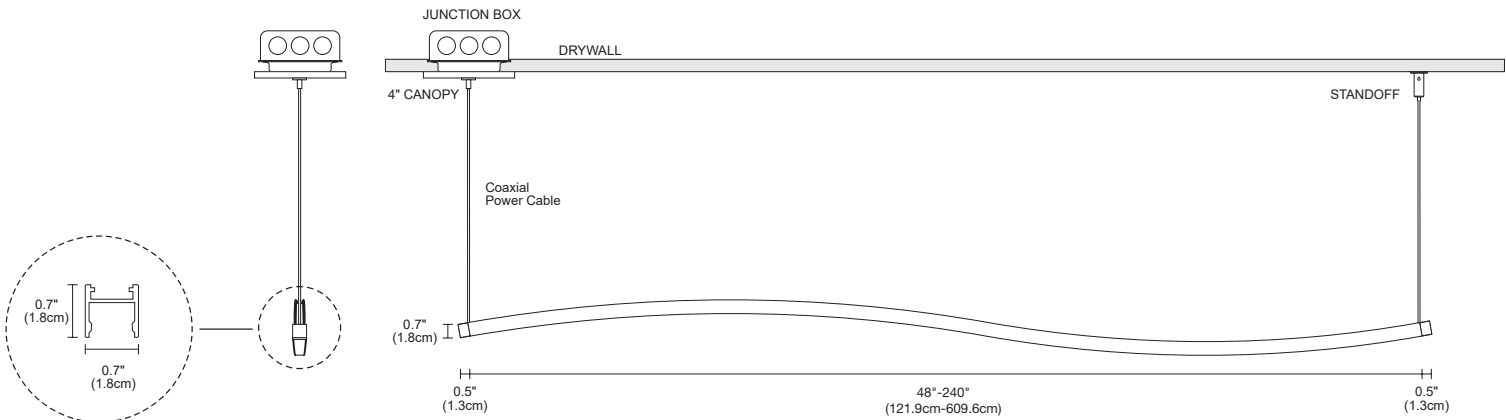

**Zipp Wave Suspension Downlight with Remote Power 2" Canopy Shown with Louver**

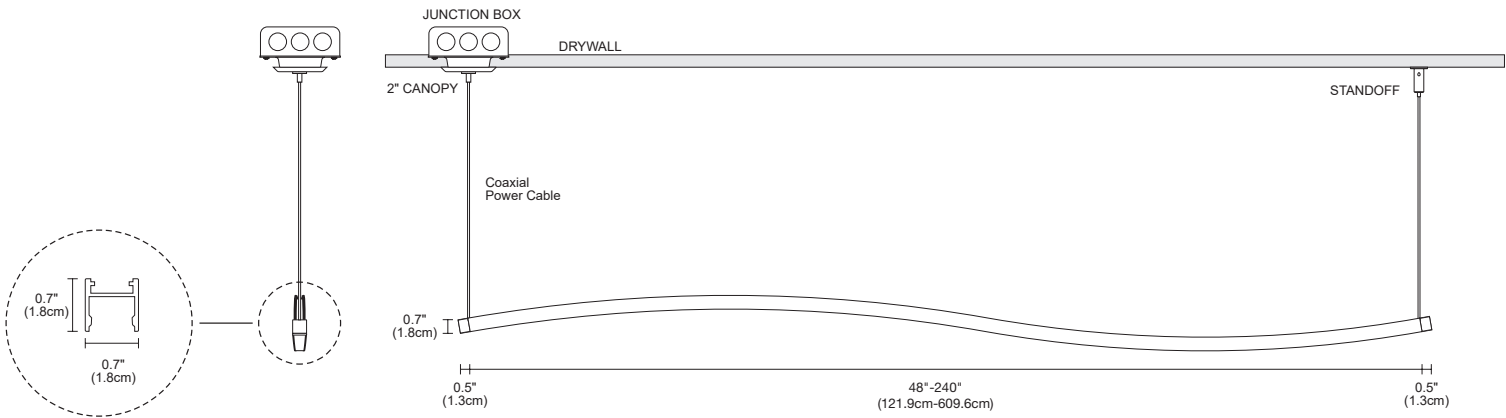


|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# ZIPP WAVE DYNAMIC TUNABLE WHITE


## LED SUSPENSION DOWNLIGHT WITH REMOTE POWER - END FEED

**Drawings:** Side-view shown with two 2" and 4" canopies; one for remote power, one blank

**Zipp Wave Suspension Downlight with Remote Power 4" Canopies Shown with Louver**

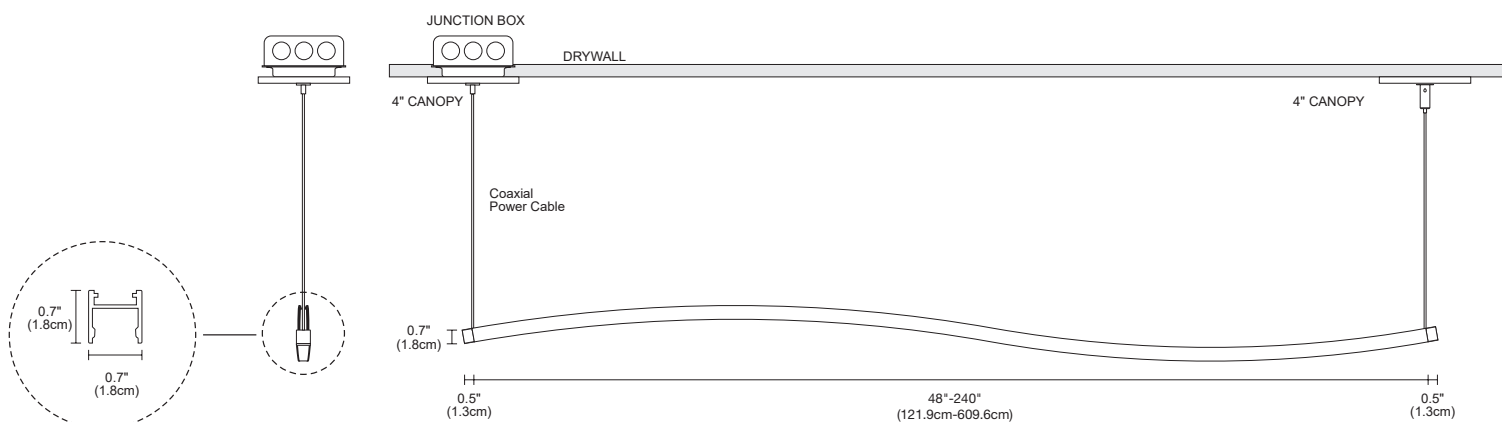


**Zipp Wave Suspension Downlight with Remote Power 2" Canopies Shown with Louver**

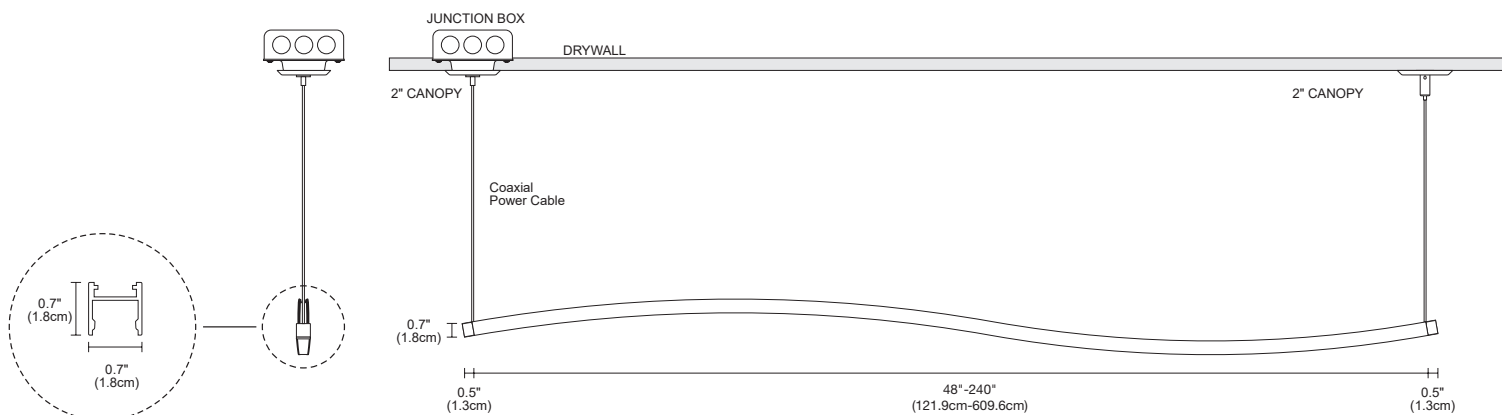

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|


### Wiring Diagram: Wiring diagram for Tunable White with Dual ELV Dimmers

- Application:** ELV dimming for Zipp Wave Suspension Downlight with Remote Power, End Feed Canopy, Tunable White 2000K-4000K
- Remote Power Supplies:** Class 2, 24VDC output: 120VAC input, PSB-2X100W-ELV-24VDC: Class 2 (24VDC wires, no conduit to J-Box)  
PSB-2X200W-ELV-24VDC: UL 2108 (24VDC wires require conduit to J-Box)
- Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELVz-300P, Maestro MAELV-600 and Radio Ra 2

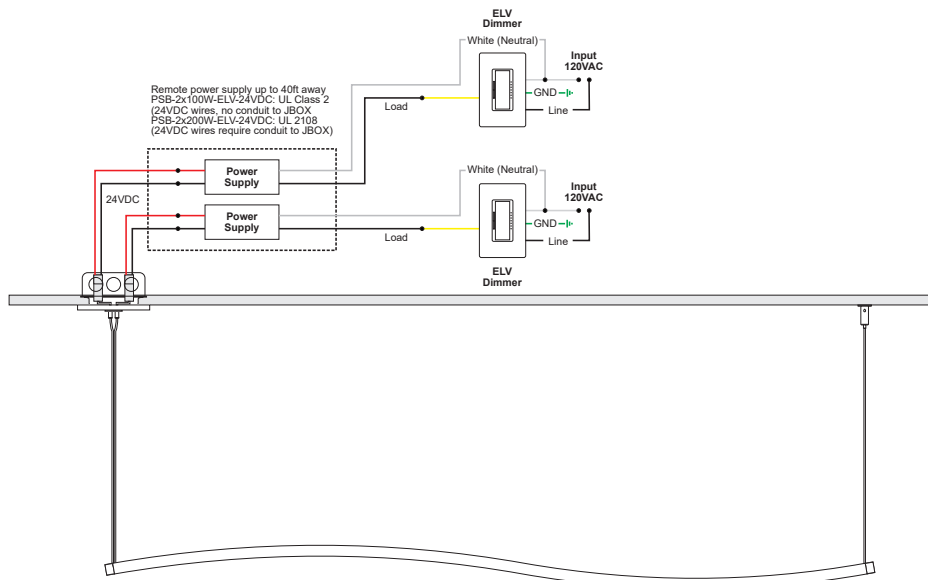

### Wiring Diagram: Wiring diagram for Tunable White with Dual 0-10 Volt Dimmers

- Application:** 0-10V dimming for Zipp Wave Suspension Downlight with Remote Power, End Feed Canopy, Static White
- Remote Power Supplies:** Class 2, 24VDC output: 120/277 VAC input, PSB-2X96W-010-24VDC: Class 2 (24VDC wires, no conduit to J-Box)  
PSB-2X200W-010-24VDC: UL 2108 (24VDC wires require conduit to J-Box)
- Dimming:** Dimmable with 0-10 dimmer: Philips: Sunrise SR1200ZTUNV; Lutron: Diva DDTV-WH, Nova-T NTSTV-DV-XX, Grafix Eye QS QSGRJ-XP, Radio RA2 RRD-1-ND; Leviton: LEV40050, IP710-LFZ; Legrand ADPD4FBL3P2W4

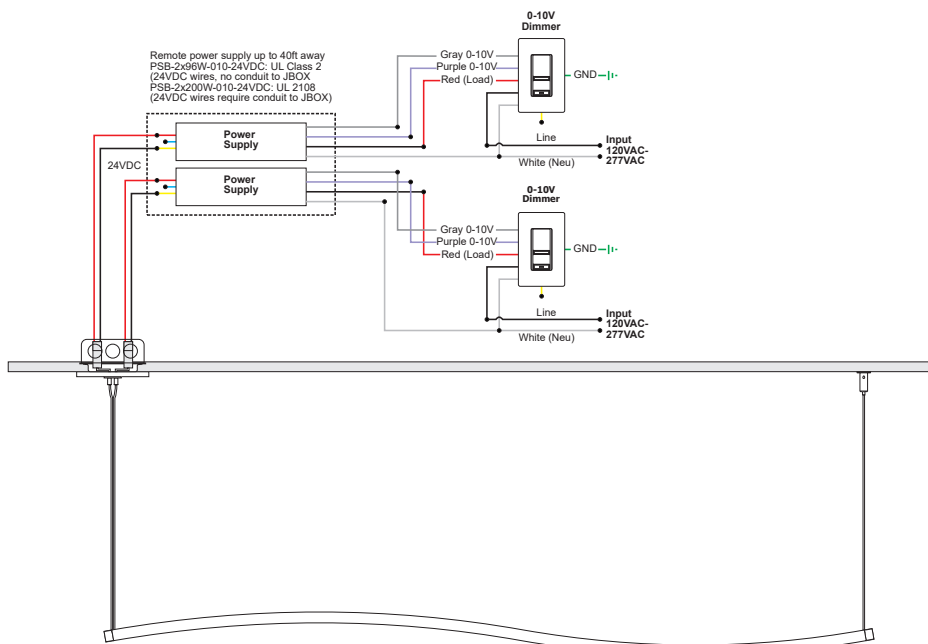


| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|
|---------|--------------|------|




TM30 DATA
LED SUSPENSION DOWNLIGHT WITH REMOTE POWER - END FEED

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K4K) | Rf: 84.3 | Rg: 96.9
Color Vector Graphic

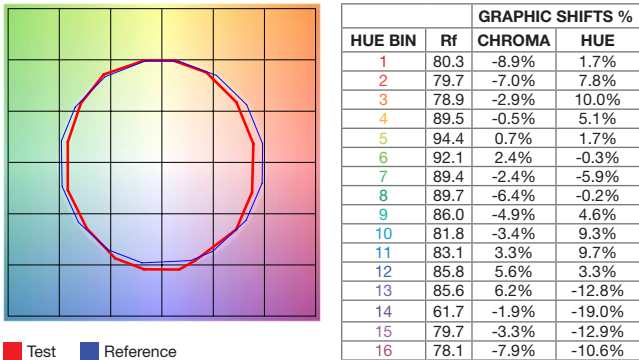

3000K (2K4K) | Rf: 90.2 | Rg: 101.4
Color Vector Graphic

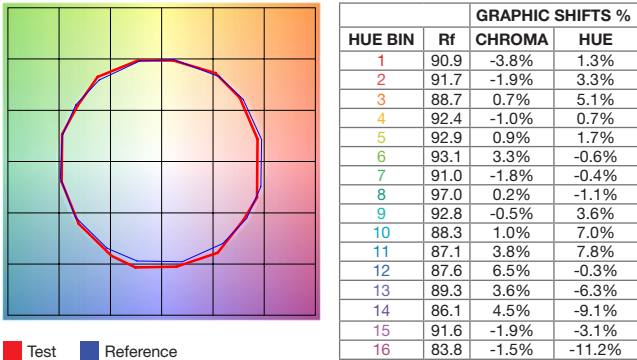

4000K ONLY (2K4K) | Rf: 89.6 | Rg: 99.1
Color Vector Graphic

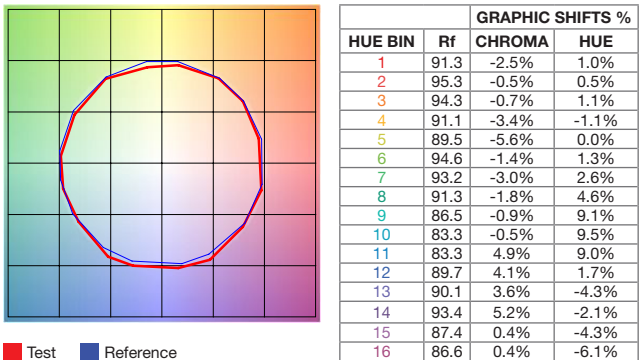


Table with 4 columns: PROJECT, FIXTURE TYPE, DATE, and an empty column.