

STEP KIT - HALOGEN & LED

REV.07.18.16



Satin Aluminum



White

Description:

The Step recessed fixture, with Scoop reflector, is perfect for stairs or walls. Halogen Step KIT includes: H1M Step (master) new construction housing, plaster screen, 10 watt, 12 volt G4 bipin base halogen JC lamp and a 60 watt electronic transformer that can power up to 5 H1S (slaves). LED L1M Step (master) includes, a 2 watt lamp and 60 watt LED Transformer that can power up to 25 LED L1S Step (slaves), which do not include transformers.

Finish:

Satin Aluminum or White

Lamp Specification:

HALOGEN (H)

H1 -Maximum 10W bipin G4 base

LED (L)

L1M/L1S - 3000K, 80 CRI

Total Wattage:

H1 -10W

L1M - 2W (with 60W power supply)

L1S - 2W (without power supply)




Dimmer:

H1 - Low Voltage Electronic

L1 - Low Voltage Electronic

Weight:


.40 lb (.18 kg)

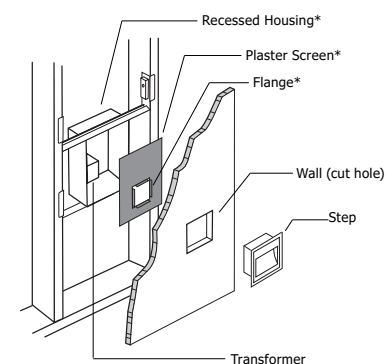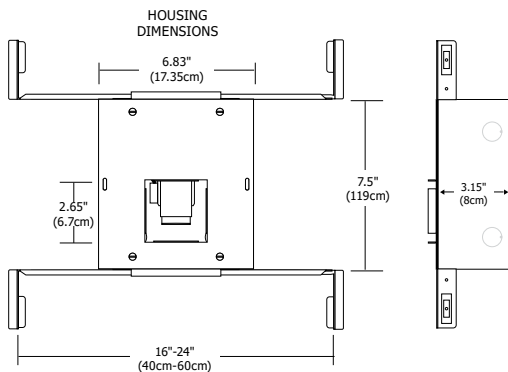

*not used when installing in furniture, stairs, or mirrors

STEP	Description	Lamp	Finish	Voltage
KIT	Housing & Fixture	H1M Halogen Master (White Only) H1S Halogen Slave L1M LED Master L1S LED Slave	SA Satin Aluminum WH White	Standard 120V (leave blank) 2 230V 50Hz

FOOT CANDLE CHART (FC)

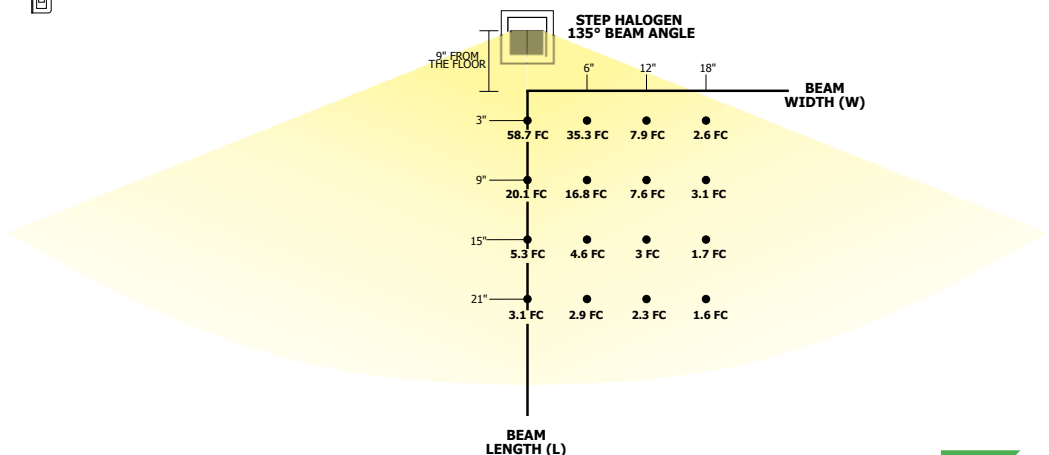

PROJECT:

FIXTURE TYPE:

DATE:

