

FLOW PIPE SUSPENSION RGBTW

24VDC, CENTER FEED WITH POWER

ASSEMBLED IN AMERICA

REV 04.06.26




DESCRIPTION

The Flow Pipe TruColor™ Suspension features a 360 Flex LED seamlessly wrapped around a decorative pipe, allowing you to experiment with various configurations for a range of unique and dynamic designs. Designed for flexibility across minimal, transitional, and contemporary environments, it offers a broad range of finish and mounting options to complement any aesthetic. Cora Weave introduces a tactile dimension, showcasing a woven textile sleeve within a transparent housing and delivering seamless, omnidirectional illumination. Make the design your own, by pushing the extra flex into the ends of the pipe up to 12" on each end. Available in **TruColor™ RGBTW** Dynamic RGB with Tunable White 1500K-6500K. Fixture includes a 5-year pro-rated warranty. For custom lengths, finishes, designs, and quotes send drawings to design@PureEdgeLighting.com.

INSTALLATION

- Pre-wired for a 120V power supply in canopy feeding 24VDC
- Includes adjustable 12' 24V coaxial cable and two aircraft cables up to 12' long, custom stem ceiling connections available upon request

FINISHES

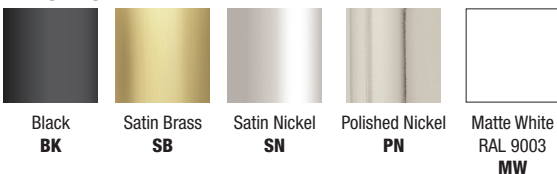

LENS

- Cora Weave - 360°, 1" diameter lens with a woven texture

LAMPING

- TruColor™ RGBTW Red, Green, and Blue with Tunable White (1500K-6500K)
- 5W 147lm/ft 5W5 @3000K
- Designer-grade Color Rendering 94+ CRI
- 50,000 Hour Lamp Life

POWER SUPPLY IN CANOPY

- Electronic Power Supply in Canopy
- Electronic Dimming (ELV), 120V 5.125" x 1.375" surface mount, Matte White RAL 9003 round canopy
- [2-in-1 Power Driver and Dimmer](#)

MAKE IT SMART


- [Pure Smart™ Wiz Pro Controls](#)

APPLICATIONS

Designed for indoor use only. Ideal environments include commercial, architectural and retail spaces in addition to offices, conference rooms, entrance halls and lobbies.

APPROVALS

Class 2 Wiring up to 100 watts, Damp Location Suitable, ETL listed. Assembled in America.

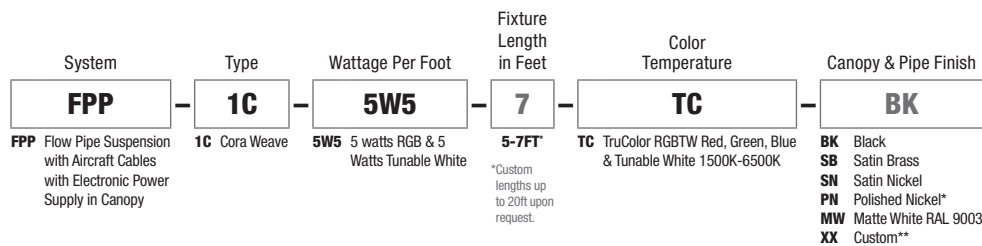



FLOW PIPE SUSPENSION RGBTW

24VDC, CENTER FEED WITH POWER



PROJECT
FIXTURE TYPE
DATE

REV 04.06.26


NOMINAL DELIVERED LUMENS

DESCRIPTION	5W5 5W RGB & 5W TUNABLE WHITE									
	5W Maximum									
WATTS PER FOOT	20K	22K	24K	27K	30K	35K	40K	57K	65K	
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	112	126	131	139	145	155	158	127	119	
LUMENS PER WATT (lm/w)	21	25	27	32	34	34	33	32	40	
CRI	92	94	95	95	96	97	97	92	90	
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	
Rf	91	93	94	94	95	94	94	92	90	
Rg	105	101	103	105	104	102	100	102	103	
R9	90	90	90	94	97	97	91	81	70	
R13	92	94	95	95	94	96	99	90	87	
R15	99	99	99	98	97	97	97	89	85	
WATTS/FOOT	5.3	5	4.8	4.4	4.3	4.5	4.8	4	3	

LENS OPTIONS




1C Cora Weave

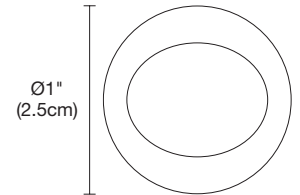


360° LENS
(Flexible, Illuminated)

DRAWINGS

7' Fixture Length Diagrams Shown Below

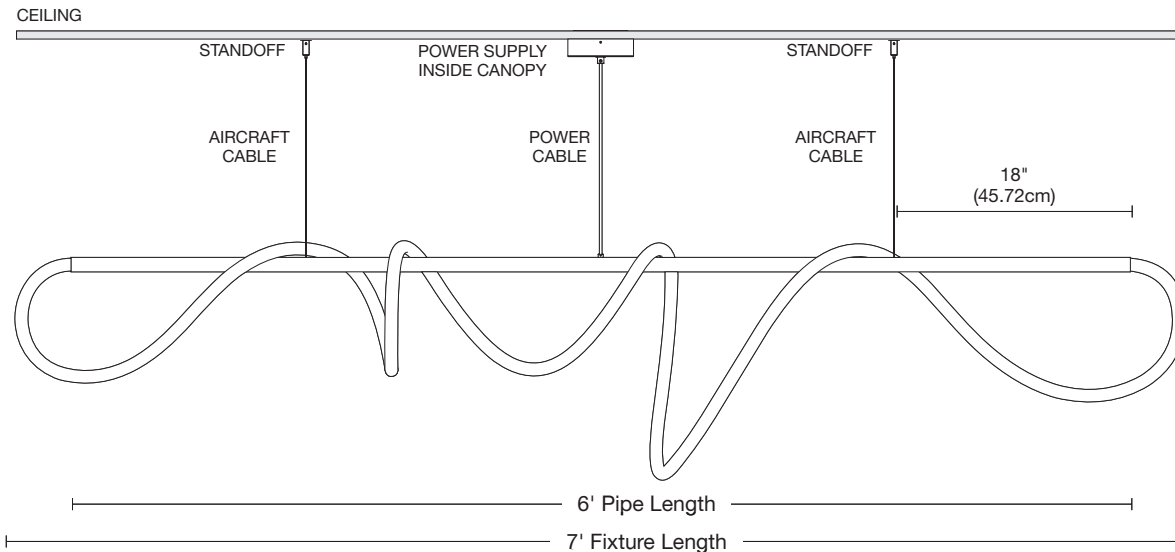

STRAIGHT PIPE
(Rigid, Not Illuminated)

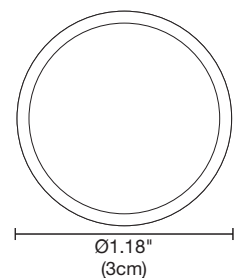


FIXTURE LENGTH (IN FT)	FIXTURE WEIGHT (IN LBS)
5	6
6	7
7	7

PIPELINE® TRACK SUSPENSION WITH UPLIGHT

24VDC, TWO CIRCUIT, REMOTE POWER, END FEED

REV 04.06.26

INCLUDED COMPONENTS (Finish based on ordering code selection)

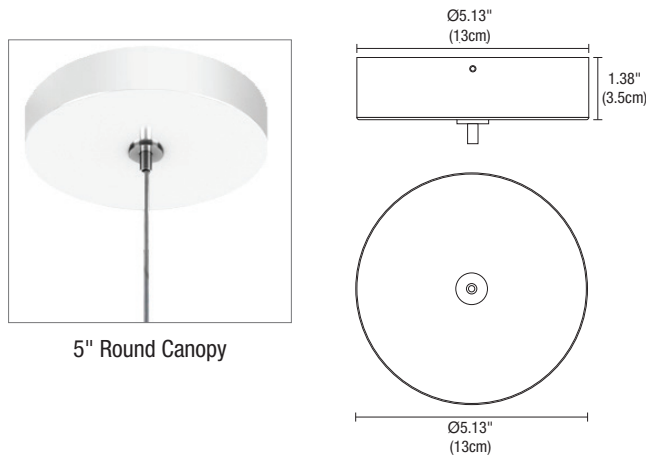

SURFACE MOUNT CANOPY WITH 120V-24VDC 96W POWER


ELV or TRIAC dimming. (Included with ordering code).

System	Wattage	Voltage	Finish
PCEG	96W	24VDC	MW
PCEG Electronic Power Supply in Canopy with Grip Jack	96W 96 Watt	24VDC 24 Volts DC	BK Black SB Satin Brass SN Satin Nickel PN Polished Nickel MW Matte White RAL 9003

Finishes:



ACCESSORIES

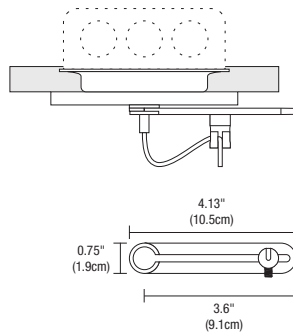


CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel suspension when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with Power Canopies (Canopy not included).


Product	Type	Finish
CS	ADJ-DP-SWAG	SN
CS Channel Suspension	ADJ-SWAG Adjustable Swag Hook for Static White ADJ-DP-SWAG Dual Post Adjustable Swag Hook for 2K4K & RGB	SN Satin Nickel

CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from an electrical box that is not located directly above desired fixture location.

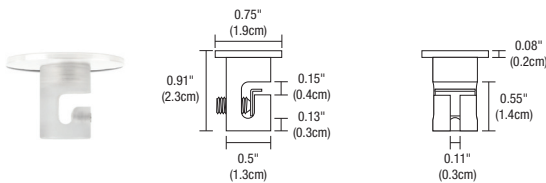

System	Type
CS	SWAG
CS Channel Suspension	SWAG Swag Hook

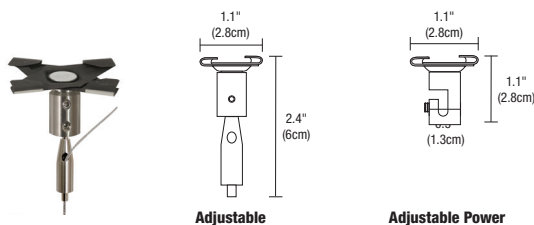


CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP

Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Adjustable is offered in Satin Nickel and Adjustable Power is offered in Clear plastic.

Product	Type	Options
CS	TBAR	A
CS Channel Suspension	TBAR 9/16" and 15/16"	A Adjustable AP Adjustable Power

Wiring Diagram

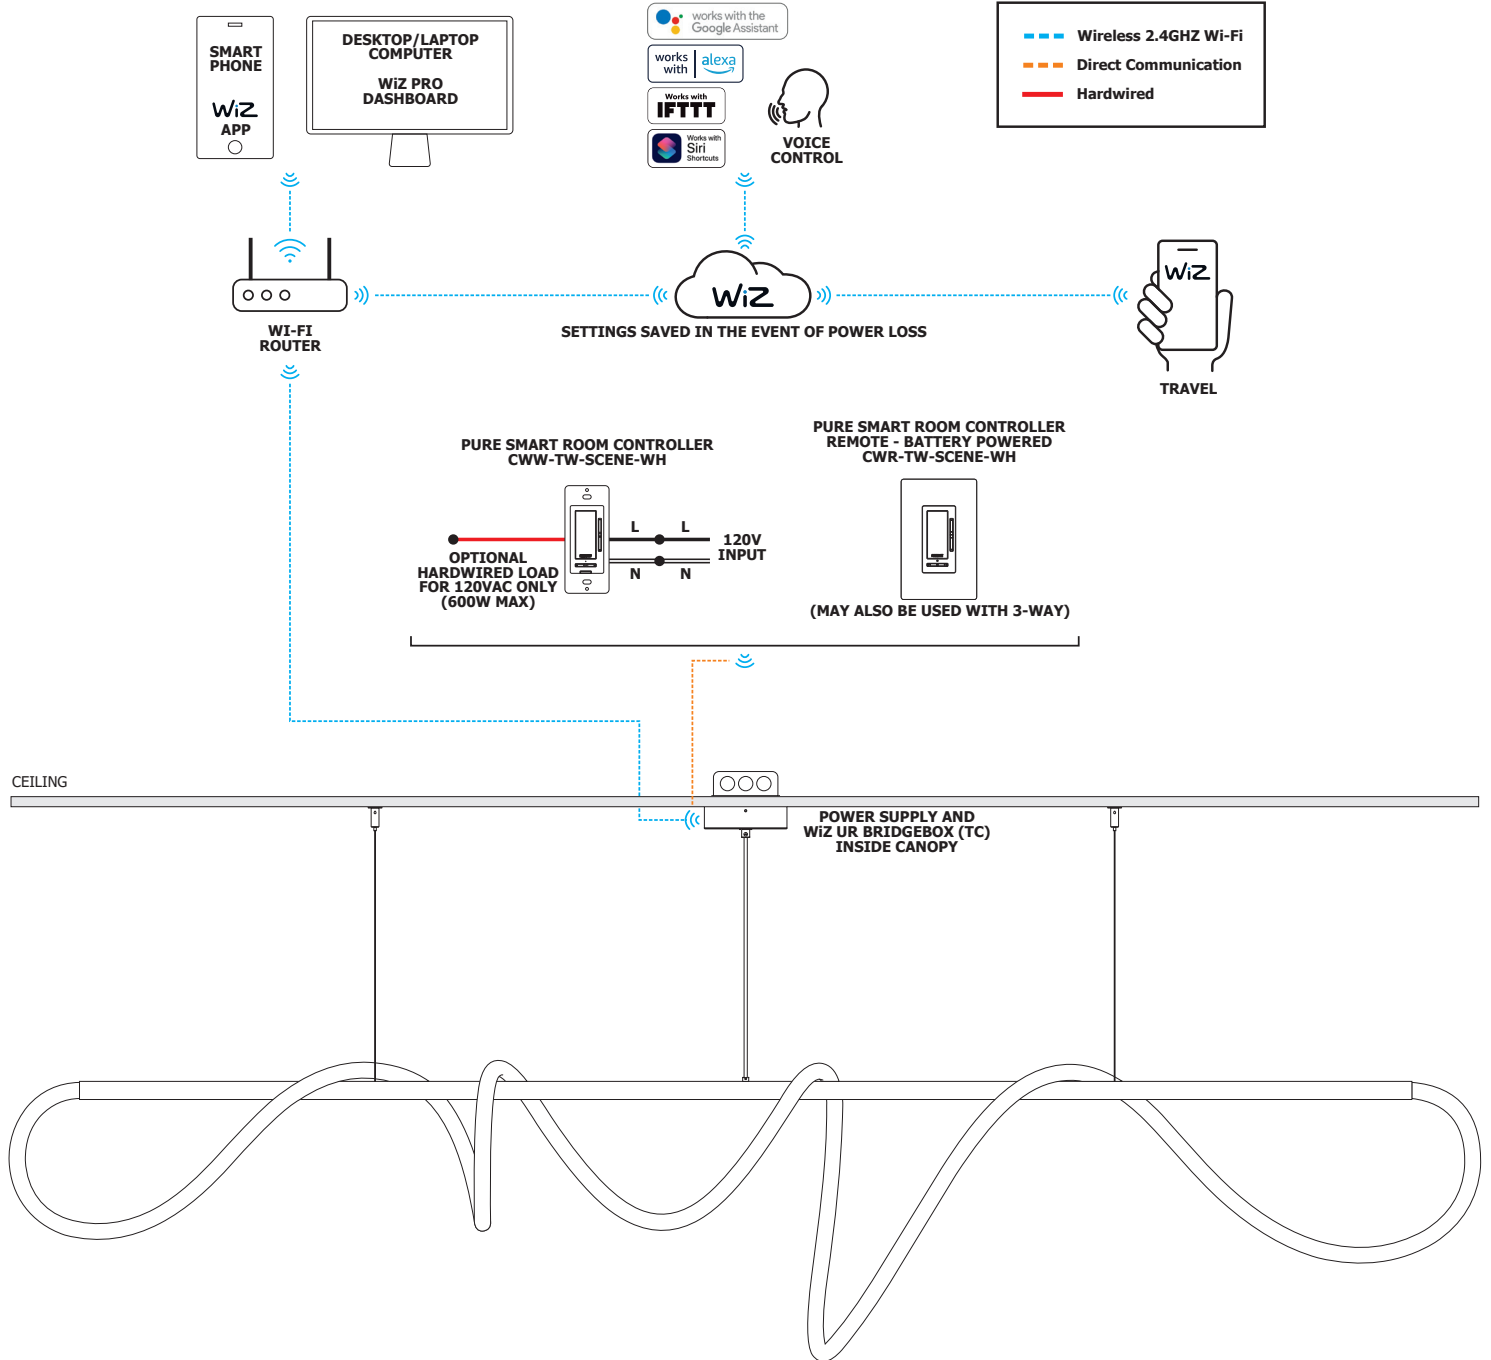


SUSPENSION TM30 DATA


24VDC, CENTER FEED WITH POWER

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

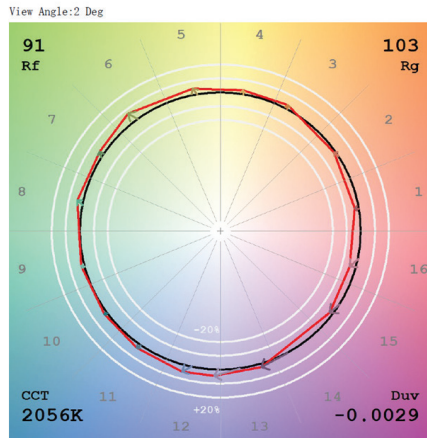


2200K (TruColor™ RGBTW)

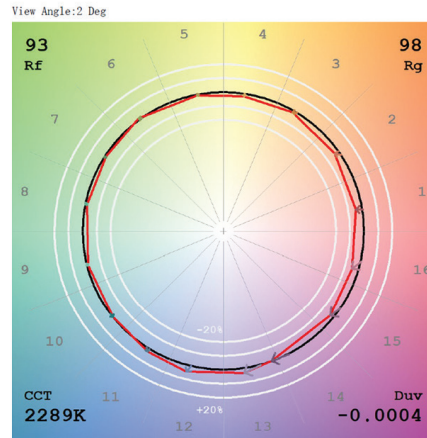


2400K (TruColor™ RGBTW)

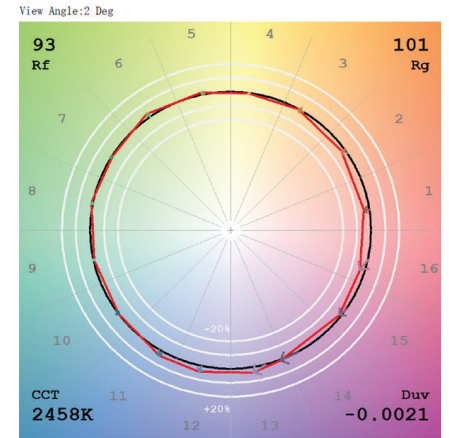


2700K (TruColor™ RGBTW)

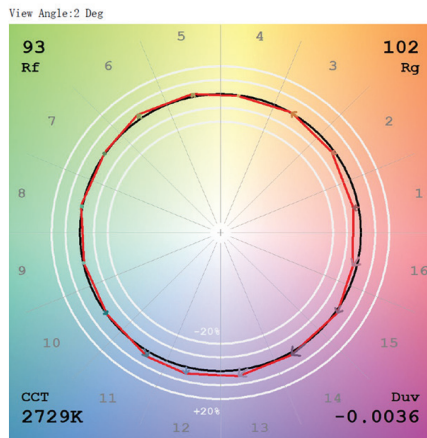


3000K (TruColor™ RGBTW)

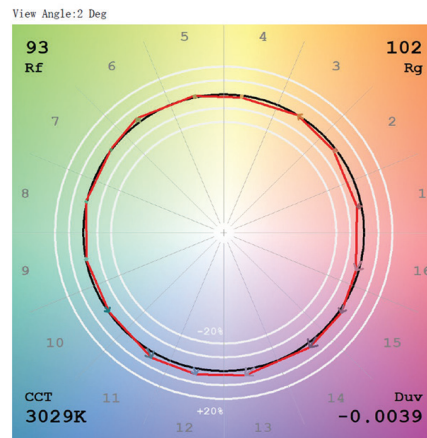


3500K (TruColor™ RGBTW)

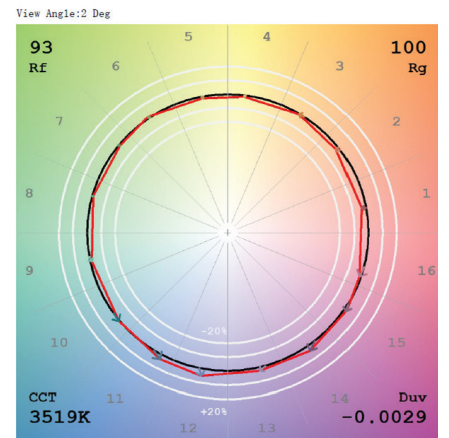

4000K (TruColor™ RGBTW)

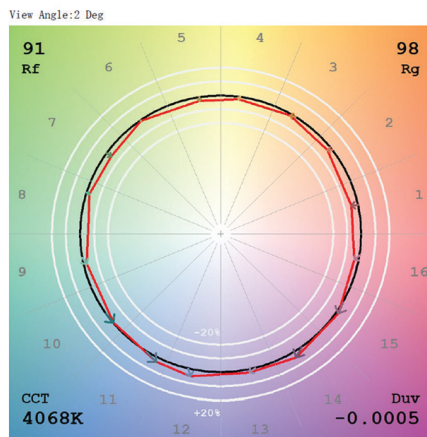

5700K (TruColor™ RGBTW)

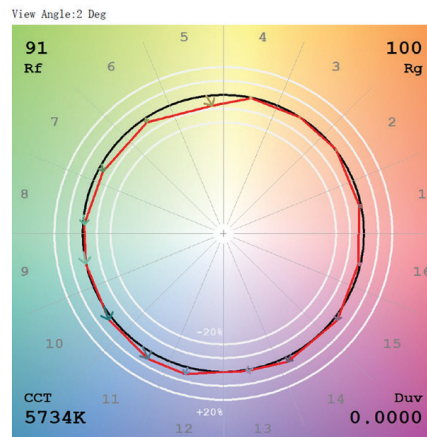

6500K (TruColor™ RGBTW)

