

FLEX STRIP - INLINE LED



Description: INLINE LED snaps easily into the low-voltage Flex Strip system and uses Nichia 1/2 watt, warm white LEDs; 2" (5.08cm), 4" (10.16cm) and 12" (30.48cm) modules snap into the Flex Strip system instead of using the standard 3 watt or 5 watt festoon type lamp. INLINE LED 12" (30.48cm) modules consume only 8W per foot at 204 lumens compared to 37W per foot of Xenon Festoon type lamps. The remote #PS-LED-100-24DC or #PS-LED-600-24DC power supply is dimmable with a standard "off-the-shelf" Lutron #NTFTV dimmer and can power up to 70 ft of Flex Strip. Applications: cove, under cabinet and display lighting.




Lamp: 24VDC LED warm white 2950K
 INLED-2 = 2" (5.08cm) long 4.5W
 INLED-4 = 4" (10.16cm) long 6W
 INLED-12 = 12" (30.48cm) long 8W

Dimmer: Lutron NTFTV with power supply below

Remote Power Supply: #PS-LED-100-24DC or #PS-LED-600-24DC

Weight: 5 oz (.142 kg)

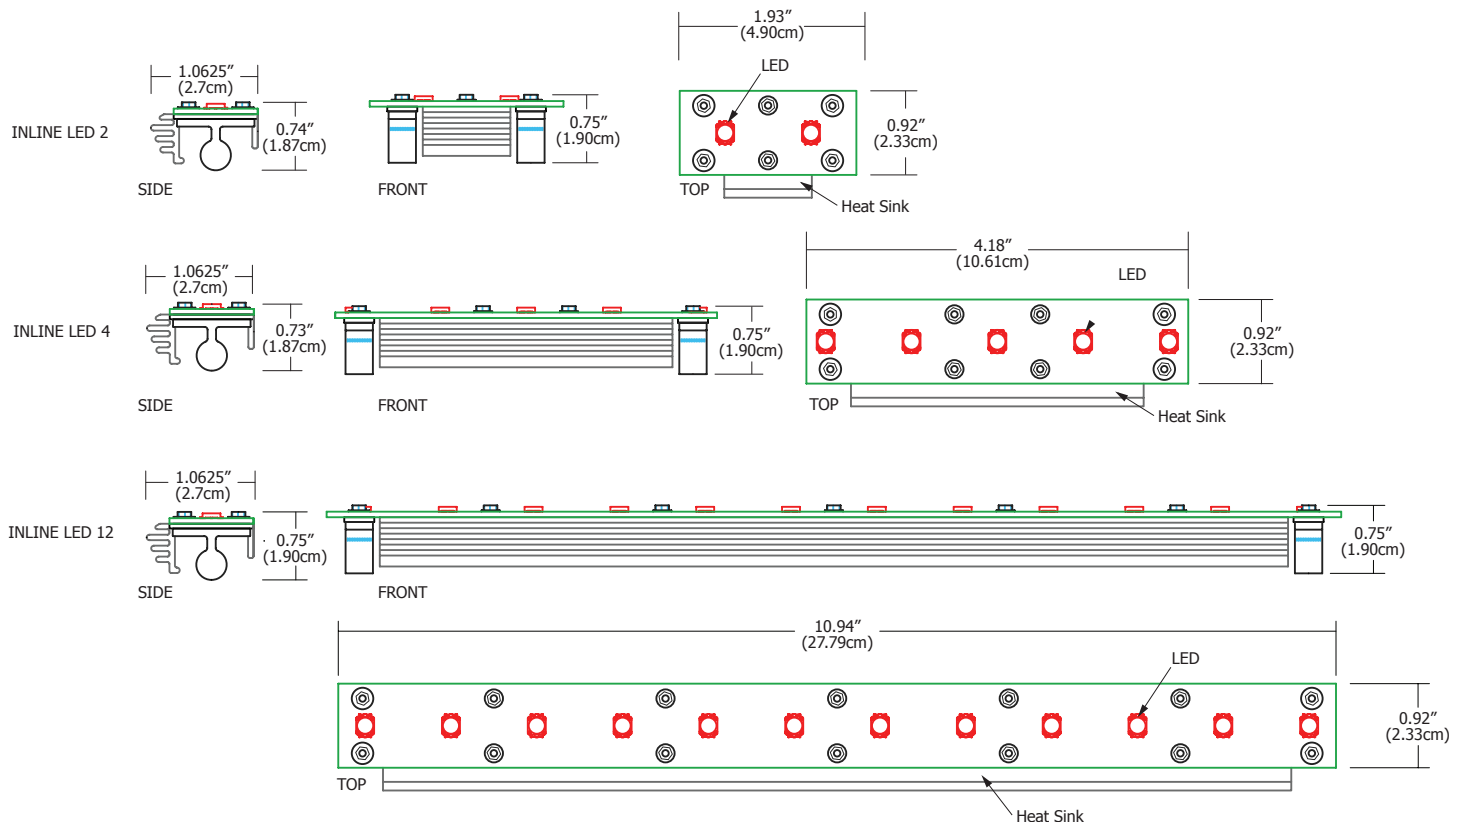

Ordering Code

INLED

Size

2

Color Temp.

WW

-2" (5.08cm)
 -4" (10.16cm)
 -12" (30.48cm)

-WW - Warm White - 2950K

COMPANY:

FIXTURE
TYPE:

DATE:

PROJECT:

CONSULTANT:

APPROVED
BY:

Edge
LIGHTING