

SIDE VIEW

FRONT

DESCRIPTION

The Pipeline 2 is a LED cylinder-shaped steel pendant with a milky white Diffused White 280° lens. Offered in lengths from 12" - 60". Includes 8' of field-cuttable coaxial cable and Fast Jack Connector.

SYSTEM COMPATIBILITY

24VDC Fast Jack (**FJ24**)

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY):

- Electronic Low Voltage Dimming (**ELV**)
- 0-10 Volt Dimming (**0-10V**)

*In-Wall Mounting Kits available for select power supplies

FINISH




Black **BK** Chrome **CH** Satin Nickel **SN** White **WH**

LAMP SPECIFICATION

- 2 or 5 Watt 24VDC
- 2200K-5700K Including Warm Dim
- 90+ CRI
- Lamp life 50,000 hours
- Dimmable

DESCRIPTION	280° Diffused White Lens, 176° Beam Spread																	
	2w (2 watts)								5w (4.4 watts)									
WATTS PER FOOT																		
COLOR TEMPERATURE	22K	24K	27K	27D	30K	30D	35K	40K	57K	22K	24K	27K	27D	30K	30D	35K	40K	57K
LUMENS PER FOOT (lm/ft)	202	224	246	261	269	285	308	334	356	301	334	367	389	401	425	459	499	531
LUMENS PER WATT (lm/w)	46	51	56	54	61	60	70	76	81	68	76	83	81	91	89	104	114	121
CRI	85+	90+	95+	95+	95+	95+	85+	84	84	85+	90+	95+	95+	95+	95+	85+	84	84

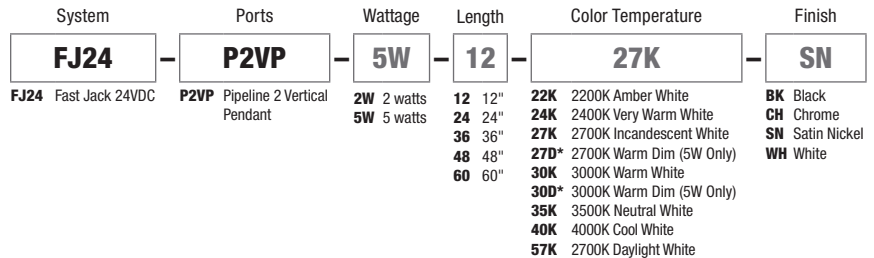


FRONT

BACK



12"-60"
(30.5cm-152.4cm)

12"-60"
(30.5cm-152.4cm)



PROJECT	FIXTURE TYPE	DATE
---------	--------------	------